

USB / Ethernet true RMS

Smart Power Sensor

PWR-6LRMS-RC

50Ω -45 dBm to +10 dBm, 50 to 6000 MHz

The Big Deal

- **USB and Ethernet control**
- True RMS power sensor (Measure CW and modulated signals)
- Includes GUI with measurement applications software, simplifying complex measurements
- Measure power levels as low as -45 dBm
- Measurement speed 30msec



CASE STYLE: JL1941

Product Overview

The Mini-Circuits PWR-6LRMS-RC true RMS Smart Power Sensor is a pocket-sized, 4.95" x 1.74" x 1.08", precision test device, controlled via USB or Ethernet, that turns your Windows® or Linux® PC into a power meter. The power sensor provides highly accurate measurements of CW, modulated and multi tone signals providing plug-and-play measurement capability for a wide variety of applications including testing 3G and 4G products, cell phones and general RF components. Each unit is shipped with our N-to-SMA adapter, a quick-locking "Y" control cable for reliable connectivity of both USB and Ethernet control, and a power adapter with a USB type A connector. User-Friendly GUI software, DLLs for programmers, user guide and detailed programming instructions are provided on the included CD or via download from minicircuits.com.

Key Features

| Feature | Advantages |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| True RMS | Allows measurement of CW, modulated and multi tone signals |
| Ethernet-TCP/IP- HTTP and Telnet Protocols (Supports DHCP and Static IP) | The PWR-6LRMS-RC power meter can be controlled from any Windows®, Mac®, or Linux® computer, or even a mobile device with a network connection and Ethernet-TCP/IP (HTTP or Telnet protocols) support. Using a VPN would allow remote control from anywhere in the world. |
| USB control | User may also control the power sensor via USB connection. Plug-and-Play, no driver required. Compatible with Windows® or Linux® operating systems using 32 and 64 bit architecture (up to 24 sensors simultaneously). |
| GUI program with USB and Ethernet interfaces | Allows quick and easy measurement, average measurements, data recording, and more. |
| 'Measurement Application' GUI software built-in | Automated measurement setups which allow the user to perform measurements on RF components such as Couplers, Filters, Amplifiers, etc. , display numerical data and graphs, and analyze the data. |
| No calibration required before taking measurement | The PWR-6LRMS-RC does not require any reference signal for calibration. |
| 5V power supply | Powered via USB plug from PC, supplied AC adapter or from commercially available Power Over Ethernet (PoE) splitter with 5V output. |

Trademarks: Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Linux is a registered trademark of Linus Torvalds. Mac is a registered trademark of Apple Corporation. Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits PWR-series power sensors are affiliated with or endorsed by the owners of the above referenced trademarks

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.



Smart Power Sensor

PWR-6LRMS-RC

50Ω 50 to 6000 MHz

Product Features

- USB and Ethernet control
- Supports HTTP and Telnet network protocols
- True RMS detection enables measuring CW, modulated and multi-tone signals.
- 55 dB Dynamic Range, -45 to +10 dBm
- Good VSWR, 1.10:1 typ.
- Fast measurement speed, 30 msec typ.
- Automatic frequency calibration & temperature compensation
- Multi-sensor capability (up to 24)
- Built in Application Measurement Software
- Remote operation via internet
- Effective, easy-to-use Windows® GUI
- Compatible with 32/64-bit Windows® or Linux® operating systems
- Supports a wide range of programming environments (See application note [AN-49-001](#) for details)



CASE STYLE: JL1941

Installation CD


| Model No. | Description |
|-----------------------------|-------------------------------------------------|
| PWR-6LRMS-RC | USB/Ethernet smart True RMS Power Sensor |
| Included Accessories | |
| PWRSN-6LRMS-RC | Power Sensor Head |
| USB-AC/DC-5 | AC/DC 5V Adapter |
| USB-RJ45-CBL-7+ | 6.6 ft "Y" data cable (USB & RJ45) |
| NF-SM50+ | N-Type (F) to SMA(M) Adapter |
| PWR-SEN-CD | Installation CD |

Typical Applications

- Turn almost any Windows or Linux PC into a Power Meter
- Pocket-sized portability for benchtop testing anywhere
- Remote location monitoring
- Automatic, scheduled data collection
- Evaluate high-power, multi-port devices with built-in virtual couplers/attenuators & other software tools
- Wide variety of applications including testing 3G, 4G, and Wi-Fi products

RoHS Compliant
See our web site for RoHS Compliance methodologies and qualifications

Mini-Circuits Power Meter Program for Smart Power Sensor

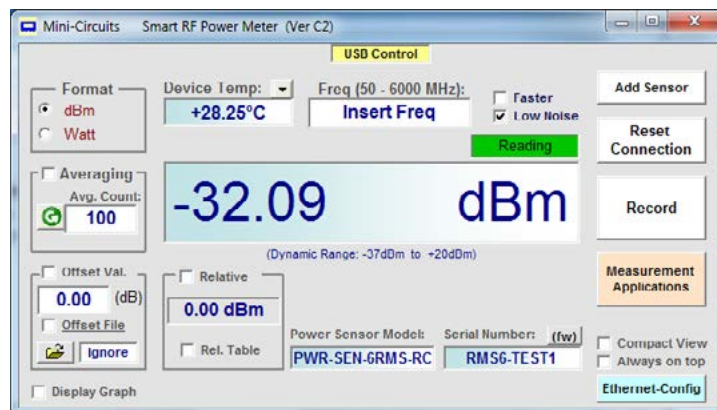

Electrical Specifications, -45 dBm to +10 dBm, 50 to 6000 MHz

| Parameter | | Freq. Range (MHz) | Min. | Typ. | Max. | Units |
|----------------------------------------------------------------|---------------------------------|-------------------|------|-------|-------|-------|
| Dynamic Range ¹ | | 50 - 6000 | -45 | - | +10 | dBm |
| VSWR | | 50 - 6000 | - | 1.10 | 1.30 | :1 |
| Uncertainty of Power Measurement ² @ 25°C | @ -45 to -40 dBm ^{3,4} | 50 - 3000 | - | ±0.15 | ±0.40 | dB |
| | | 3000 - 6000 | - | ±0.20 | ±0.45 | dB |
| | @ -40 to -10 dBm | 50 - 3000 | - | ±0.15 | ±0.30 | dB |
| | | 3000 - 6000 | - | ±0.15 | ±0.30 | dB |
| | @ -10 to +10 dBm | 50 - 3000 | - | ±0.15 | ±0.30 | dB |
| | | 3000 - 6000 | - | ±0.15 | ±0.30 | dB |
| Uncertainty of Power Measurement ² @ 0°C to 50°C | @ -45 to -40 dBm ^{3,4} | 50 - 3000 | - | ±0.15 | - | dB |
| | | 3000 - 6000 | - | ±0.20 | - | dB |
| | @ -40 to -10 dBm | 50 - 3000 | - | ±0.15 | - | dB |
| | | 3000 - 6000 | - | ±0.15 | - | dB |
| | @ -10 to +10 dBm | 50 - 3000 | - | ±0.15 | - | dB |
| | | 3000 - 6000 | - | ±0.15 | - | dB |
| Linearity @ 25°C | | 50 - 6000 | - | ± 1.6 | - | % |
| Measurement Resolution | | 50 - 6000 | 0.01 | - | - | dB |
| Averaging Range | | 50 - 6000 | 1 | - | 999 | - |
| Measurement Speed | @ Low Noise Mode | 50 - 6000 | - | 100 | - | msec |
| | @ Faster Mode | | - | 30 | - | |
| Current (via host USB) | | 50 - 6000 | - | 230 | 300 | mA |

¹ Maximum continuous safe operational power limit: +13 dBm. Performance is guaranteed up to +10 dBm.

² Tested with CW signal

³ When using Faster mode at high frequencies below -30dBm, use of averaging is recommended to prevent noise errors.

⁴ When using Faster mode below -30dBm, uncertainty value may increase by up to 0.2 dB relative to Low noise mode

Electrical Specifications (Continued), -45 dBm to +10 dBm, 50 to 6000 MHz

| Parameter | | Freq. Range (MHz) | Min. | Typ. | Max. | Units | |
|---------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------|-------------------------|-------|-------|-------|----|
| Uncertainty of Power Measurement (digital modulation) ⁵ @ 25°C | QPSK, QAM16 & QAM64 in LTE uplink setup (1.4 MHz channels, 3.7 MHz offsets) | @ -40 dBm | 50 - 1000 & 1500 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.25 | - | | |
| | | @ -15 dBm | - | ±0.25 | - | | |
| | | @ 0 dBm | - | ±0.40 | - | | |
| | QPSK in WiMax setup (10MHz channel, 22.4MHz sample clock) | @ -40 dBm | 2000 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.30 | - | | |
| | | @ -15 dBm | - | ±0.50 | - | | |
| | | @ 0 dBm | - | ±0.30 | - | | |
| | 64QAM in WLAN setup (10MHz channel, 22.4MHz sample clock) | @ -40 dBm | 2000 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.25 | - | | |
| | | @ -15 dBm | - | ±0.4 | - | | |
| | | @ 0 dBm | - | ±0.35 | - | | |
| | MSK in GSM setup (Gaussian filter @270,833 sps) | @ -40 dBm | 50 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.30 | - | | |
| | | @ -15 dBm | - | ±0.30 | - | | |
| | | @ 0 dBm | - | ±0.30 | - | | |
| | DQPSK in NADC setup (RNYQ filter@24.3 ksps) | @ -40 dBm | 50 - 6000 | - | ±0.30 | - | dB |
| | | @ -30 dBm | - | ±0.25 | - | | |
| | | @ -15 dBm | - | ±0.25 | - | | |
| | | @ 0 dBm | - | ±0.30 | - | | |
| | DQPSK in PWT setup (RNYQ filter@576 ksps) | @ -40 dBm | 50 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.25 | - | | |
| | | @ -15 dBm | - | ±0.20 | - | | |
| | | @ 0 dBm | - | ±0.25 | - | | |
| | 256QAM in DECT setup (Gaussian filter@1.152Msps) | @ -40 dBm | 50 - 6000 | - | ±0.35 | - | dB |
| | | @ -30 dBm | - | ±0.30 | - | | |
| | | @ -15 dBm | - | ±0.30 | - | | |
| | | @ 0 dBm | - | ±0.30 | - | | |
| 4QAM in PHS setup (RNYQ filter@192ksps) | @ -40 dBm | 50 - 6000 | - | ±0.35 | - | dB | |
| | @ -30 dBm | - | ±0.35 | - | | | |
| | @ -15 dBm | - | ±0.30 | - | | | |
| | @ 0 dBm | - | ±0.35 | - | | | |
| Pulse Modulation, modulating signal frequency | | 50 - 6000 | 500 | - | - | Hz | |
| Effect of multi-tone signals (within span of 15 MHz) ^{6,7} | | 50 - 100 | - | ±0.1 | ±0.3 | dB | |
| Effect of multi-tone signals (within span of 50 MHz) ^{6,7} | | 100 - 6000 | - | ±0.1 | ±0.3 | | |

⁵ Digital modulation transmission rates are measured in 'symbols per second' (sps) and use a bandpass filter on the output to limit spectral spreading.

⁶ Relative to an equivalent CW signal @+25°C

⁷ Tested at -40 to 0 dBm @+25°C average modulated power. Be careful that peak power does not exceed specified Maximum power.


Minimum System Requirements

| Parameter | Requirements |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface | USB HID or HTTP Get/Post or Telnet protocols |
| Host operating system - USB control | Windows 32/64 Bit operating system: Windows 98®, Windows XP®, Windows Vista®, Windows 7®, Windows 8®, Windows 10® Linux ® support: 32/64 Bit operating system |
| Host operating system - Ethernet control | Any Windows®, Mac®, or Linux® computer with a network port and Ethernet-TCP/IP (HTTP or Telnet protocols) support |
| Hardware | Pentium® II or higher, RAM 256 MB |
| Y control cable for USB and Ethernet (supplied) | Power sensor to be used with the supplied control cable only |




Absolute Maximum Ratings

| Parameter | Ratings |
|-----------------------|---------------|
| Operating Temperature | 0°C to 50°C |
| Storage Temperature | -30°C to 70°C |
| DC Voltage at RF port | 16 V |
| CW Power | +15 dBm |

Outline Drawing (JL1941)

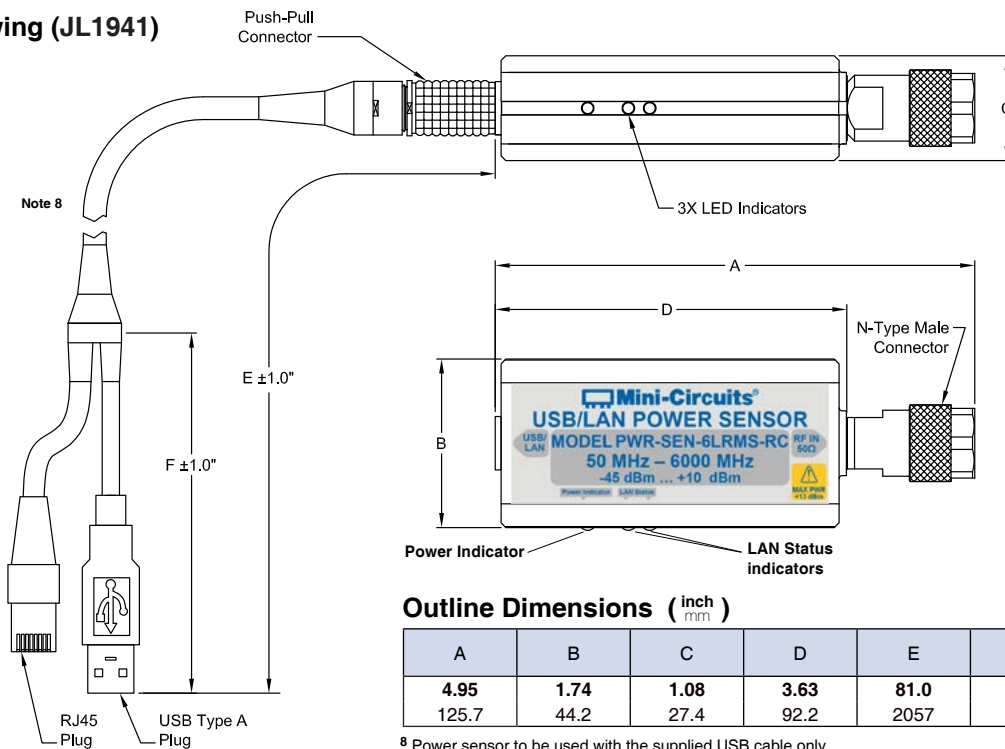


Typical Performance Curves

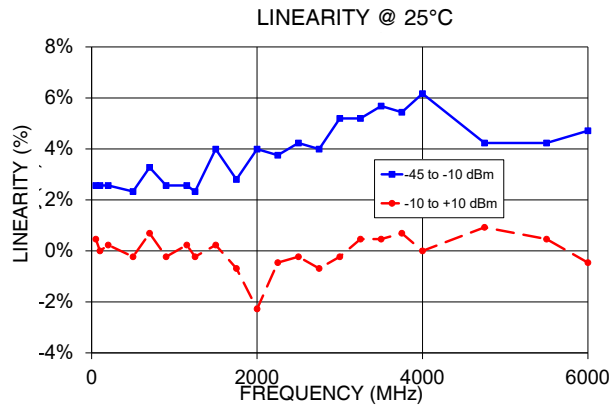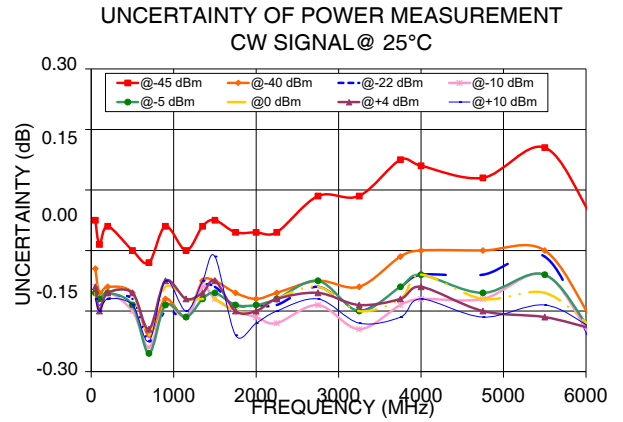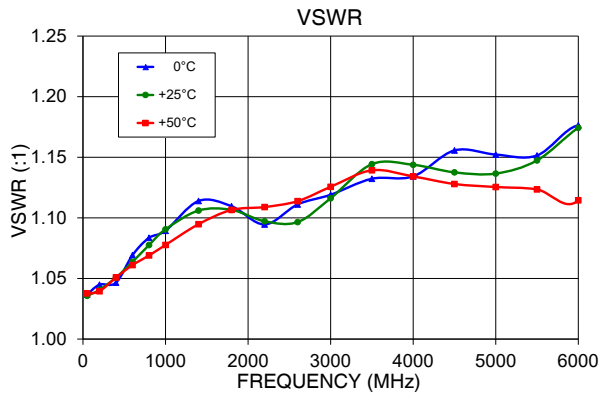


Typical Performance Curves (Continued)


UNCERTAINTY OF POWER MEASUREMENT
MODULATED SIGNALS @ 25°C, -40 dBm

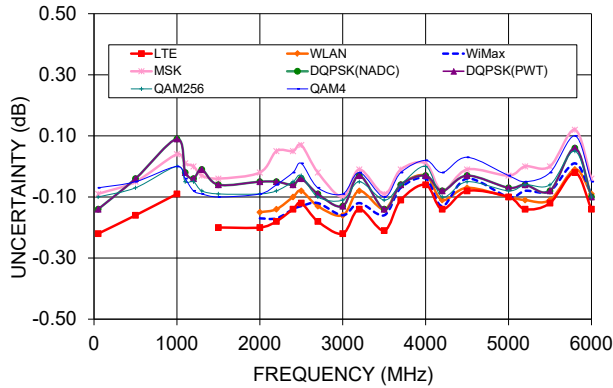


UNCERTAINTY OF POWER MEASUREMENT
MODULATED SIGNALS @ 25°C, -30 dBm

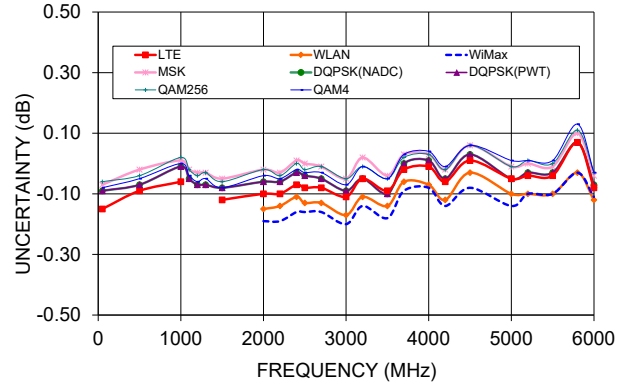

UNCERTAINTY OF POWER MEASUREMENT
MODULATED SIGNALS @ 25°C, -15 dBm

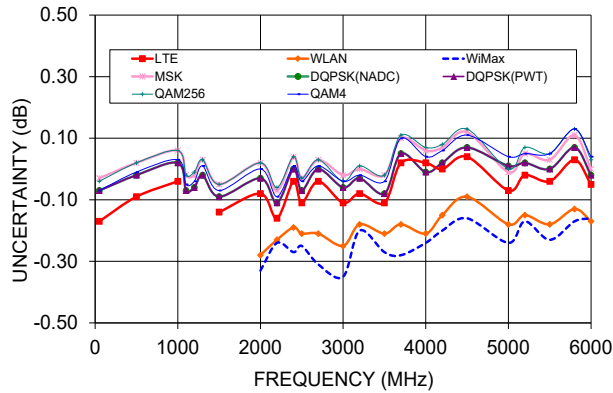


UNCERTAINTY OF POWER MEASUREMENT
MODULATED SIGNALS @ 25°C, 0 dBm

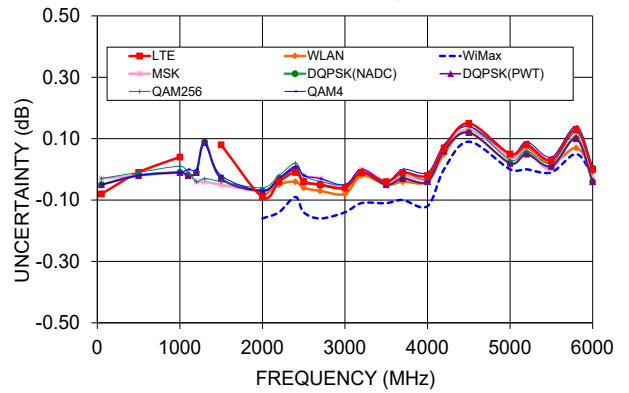


Connection diagrams

Connection diagram for USB control

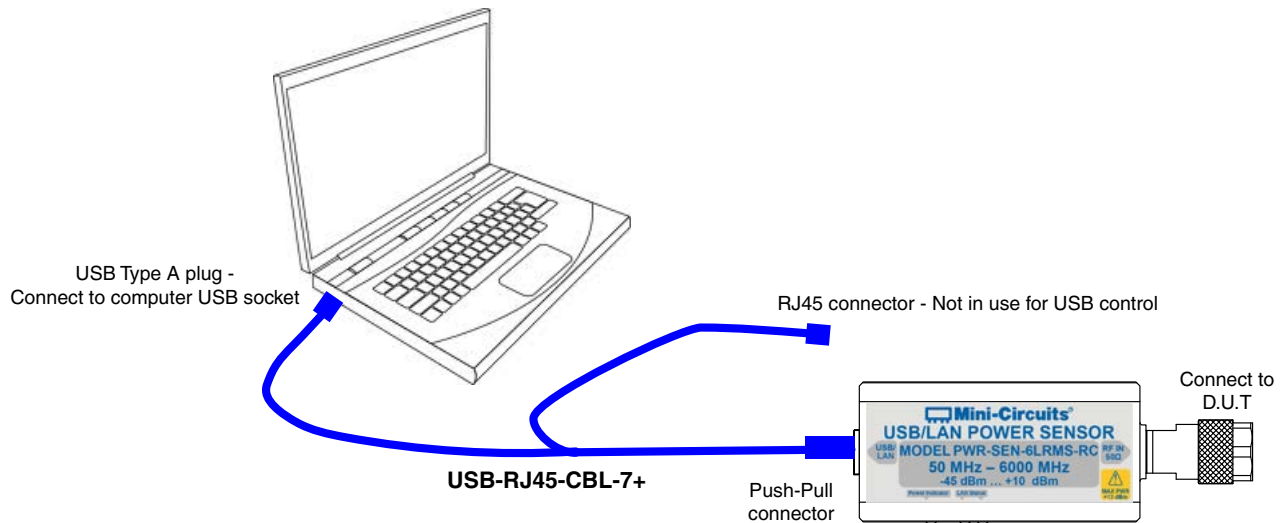


Connection diagram for Ethernet control, using power adapter

Connect USB-AC/DC-5 to mains power

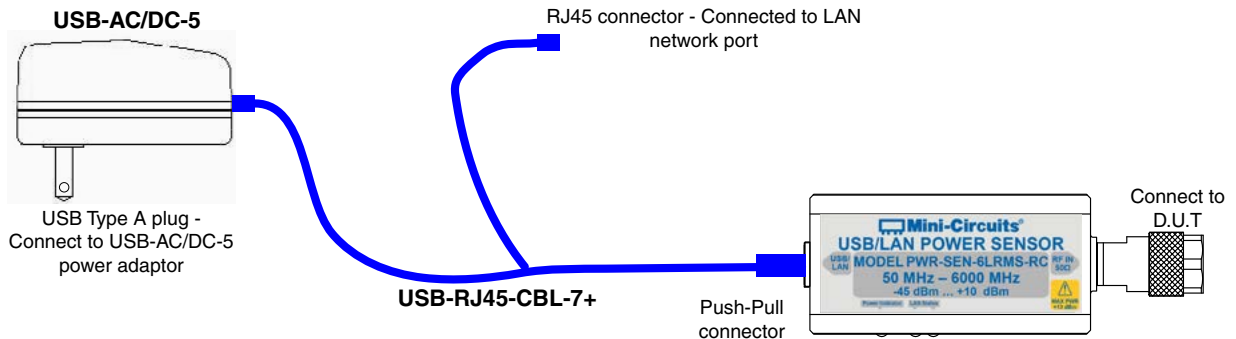

Connection diagram for Ethernet control, using PoE system

Note: Commercially available PoE splitter not supplied by Mini-Circuits

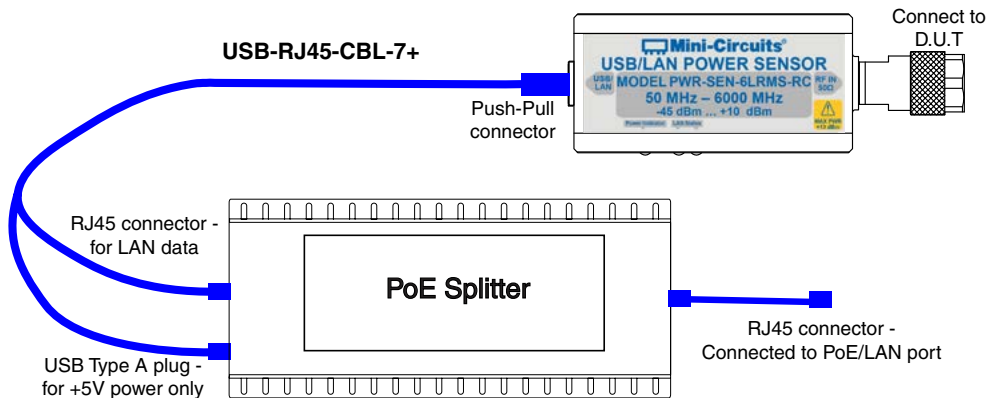

Ordering Information

| Model | Description |
|--------------|-------------------------------------------------|
| PWR-6LRMS-RC | USB/Ethernet <i>Smart</i> True RMS Power Sensor |

| Included Accessories | Part No. | Description |
|-------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | PWRSN-6LRMS-RC | Power Sensor Head |
|  | USB-AC/DC-5+ | AC/DC Power Adapter with US, EU, IL, UK, AUS, and China two pin power plugs ⁹ . Operating temperature: 0°C to +45°C, AC Input: 100-240V, 47-63 Hz, DC Output 5±0.25 V, I _{Max} =1A |
|  | PWR-SEN-CD | Software CD |
|  | USB-RJ45-CBL-7+ ¹⁰ | 6.6 ft (2 m) "Y" data cable with USB Type-A and RJ45 plug connectors |
|  | NF-SM50+ | N-Type Female to SMA Male Adapter. |

⁹ Power plugs for other countries are also available, if you need a power plug for a country not listed in the table please contact apps@minicircuits.com or check <http://www.minicircuits.com/contact/offices.html> for regional offices e-mail and phone numbers.

¹⁰ Power sensor to be used with the supplied control cable only.

| Optional Accessories | Description |
|-------------------------|--------------------------------------------------------------------------------------|
| USB-AC/DC-5 (spare) | AC/DC 5V _{DC} Power Adapter with US, EU, IL, UK, AUS, and China power plugs |
| USB-RJ45-CBL-7+ (spare) | 6.6 ft (2 m) "Y" data cable with USB Type-A and RJ45 plug connectors |
| NF-SM50+ (spare) | N-Type Female to SMA Male Adapter. |

| Calibration | Description |
|----------------|------------------------------------------------|
| CALSN-6LRMS-RC | Calibration Service Click Here |

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp