

# Programmable Attenuator

RCDAT-8000-30

50Ω 0 – 30 dB, 0.25 dB step 1 to 8000 MHz

## The Big Deal

- Attenuation range, 30 dB
- Fine attenuation resolution, 0.25 dB
- Short attenuation transition time (800 ns)
- Compact size, 2.5 x 3.0 x 0.85"
- **USB and Ethernet** control



Software Package

Case Style: MS1897

## Product Overview

Mini-Circuits' RCDAT-8000-30 is a general purpose, single channel programmable attenuator suitable for a wide range of signal level control applications from 1 MHz to 8 GHz. The Attenuator provides 0 to 30 dB attenuation in 0.25 dB steps. Its unique design maintains linear attenuation change per dB, even at the highest attenuation settings.

The attenuator is housed in a compact and rugged package with SMA female connectors on the bi-directional input and output RF ports, a standard Ethernet port (RJ45) and a USB type Mini-B power and control port.

The attenuator can be controlled via USB or Ethernet (supporting both HTTP and Telnet network protocols). Full software support is provided and can be downloaded from our website any time at <http://www.minicircuits.com/softwaredownload/patt.html>. The package includes our user-friendly GUI application for Windows® and a full API with programming instructions for Windows® and Linux® environments (both 32-bit and 64-bit systems).

## Key Features

Feature	Advantages
Ethernet control	The RCDAT-8000-30 can be controlled from any Windows® or Linux® computer with a network connection using either HTTP or Telnet protocols, giving the user layout flexibility and freedom to operate a test setup remotely from almost anywhere.
USB control	The user may also control the RCDAT-8000-30 via USB connection. The device draws all power requirements through the USB port.
Programmable attenuation sweep and Hop sequences	The RCDAT-8000-30 can be programmed with a timed sequence of attenuation settings, to run without any additional external control.
Plug-and-Play – no additional device drivers required.	Fast and easy setup and installation. The RCDAT-8000-30 interfaces with various third-party software, making it easy to integrate into existing setups.
30 dB attenuation range.	The RCDAT-8000-30 provides high-accuracy attenuation up to 30 dB in 0.25 dB steps, allowing the user precise level control over a broad attenuation and frequency range.
High linearity	Typical input IP3 of +52 dBm up to 8000 MHz.

**Trademarks:** Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Linux is a registered trademark of Linus Torvalds. Mac is a registered trademark of Apple Corporation. Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits RCDAT-series attenuators are affiliated with or endorsed by the owners of the above referenced trademarks.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.



50Ω 0 – 30 dB, 0.25 dB step 1 to 8000 MHz

**Features**

- USB and Ethernet control (HTTP and Telnet)
- Very good attenuation accuracy,  $\pm 0.3$  dB typ.
- Short attenuation transition time (800 ns)
- Sweep and Hop attenuation sequences
- Extremely low leakage
- Interchangeable Input/Output ports
- Plug & Play device – no drivers required
- User-friendly Windows® Graphical User Interface
- Supports a wide range of programming environments  
(See application note [AN-49-001](#) for details)
- Optional mounting bracket, see page 5

**Applications**

- Automated Test Equipment (ATE)
- WiMAX, 3G, 4G, LTE, DVB Fading Simulators
- C-band radar / satcom testing
- Laboratory Instrumentation
- Production Test
- Handover system Evaluation
- Power level cycling




Software Package

Case Style: MS1897


**Included Accessories**

Model No.	Description	Qty.
USB-AC/DC-5	AC/DC 5V adapter	1
MUSB-CBL-3+	2.6 ft. USB cable	1

**RoHS Compliant**  
See our web site for RoHS Compliance methodologies and qualifications

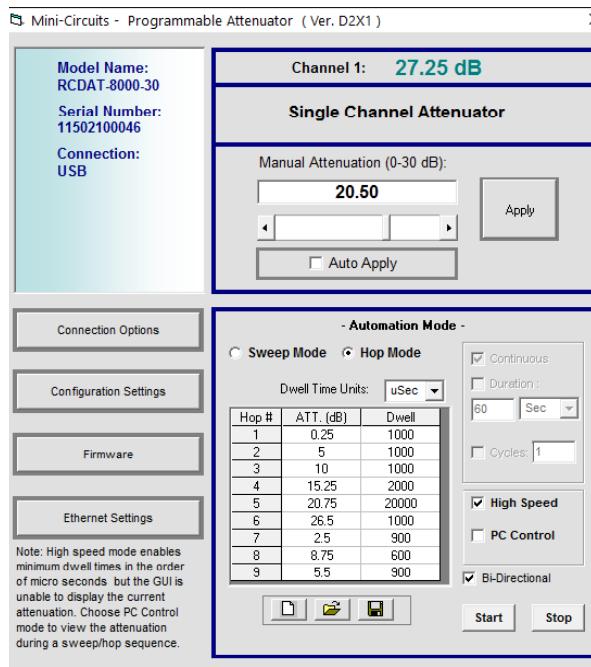**Mini-Circuits Graphical User Interface for RCDAT-Series Programmable Attenuator**

RCDAT GUI screen (USB control)

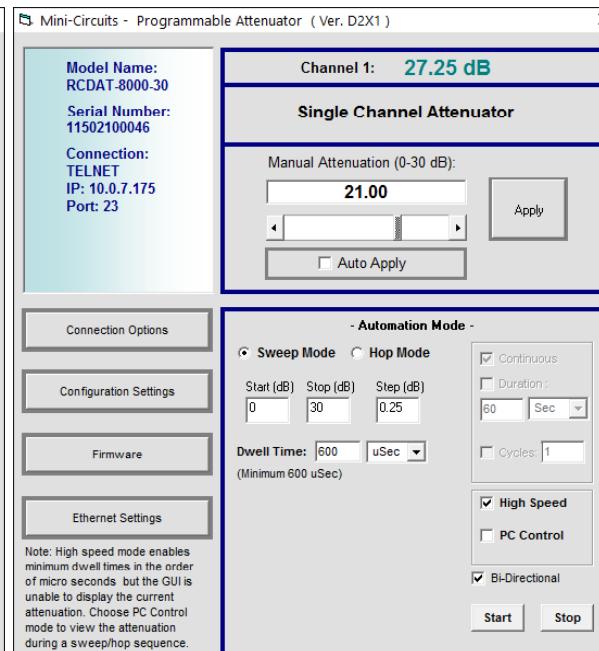


RCDAT GUI screen (Ethernet control)


For programming instructions, see [programming guide](#) on Mini-Circuits' website.



## RCDAT response to communication interrupt

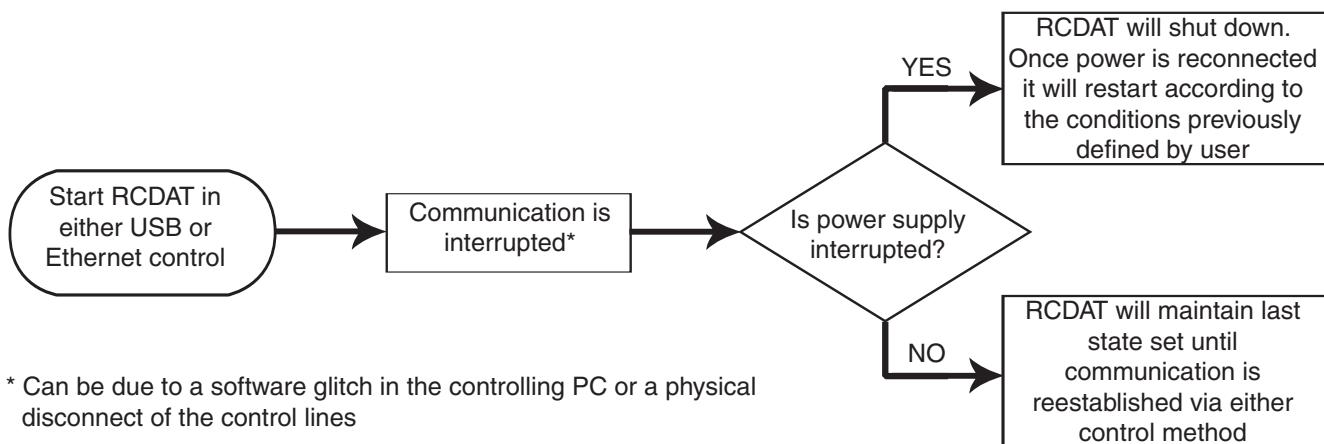





## Block Diagram

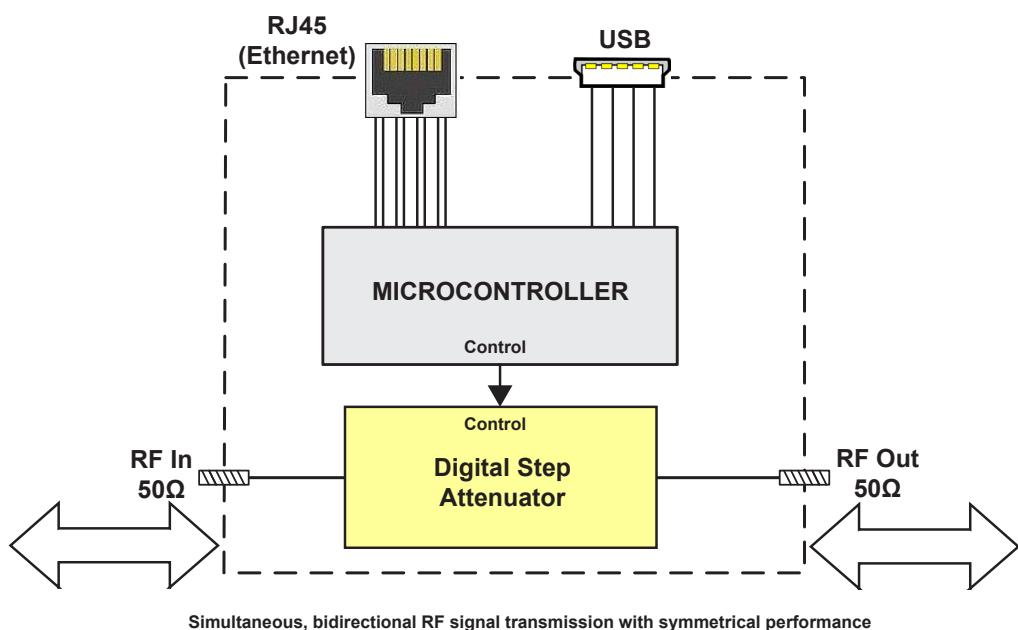

## Connections

RF In	(SMA female)
RF Out	(SMA female)
USB	(USB type Mini-B female)
Network (Ethernet/LAN)	(RJ45 socket)

## Outline Drawing (MS1897)

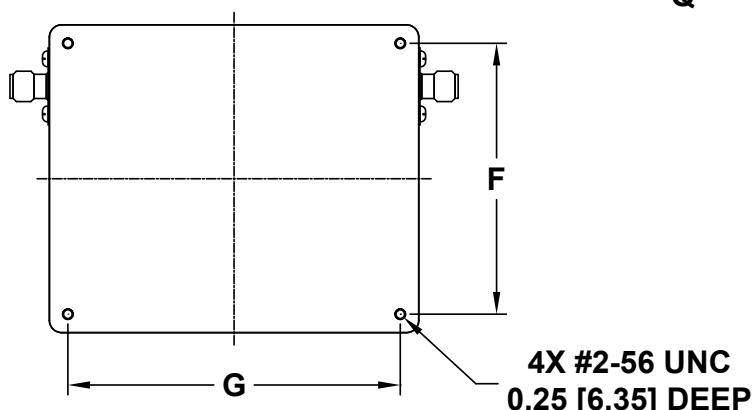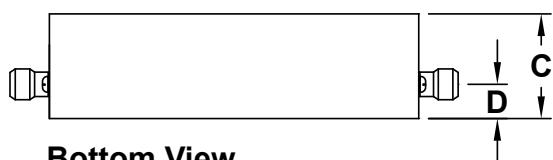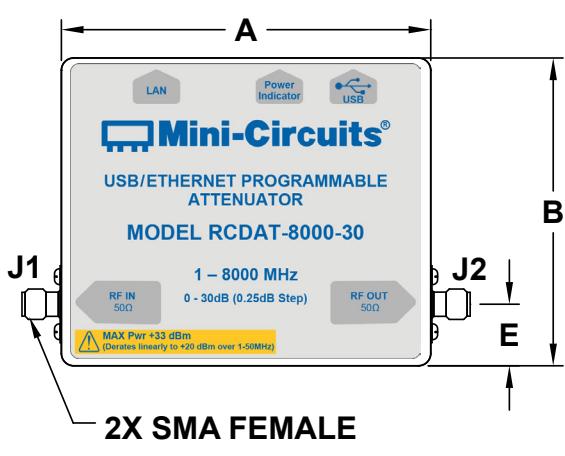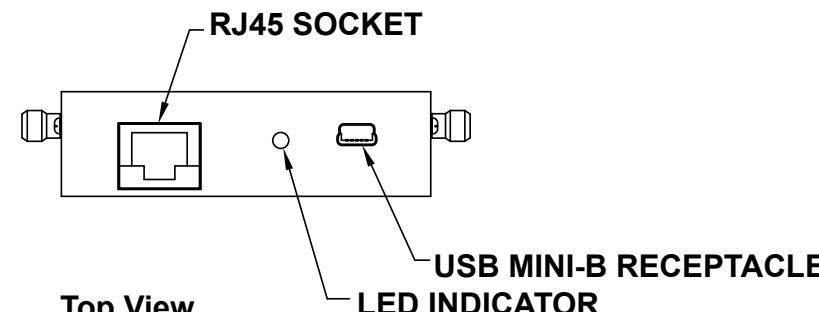
Outline Dimensions (  $\frac{\text{inch}}{\text{mm}}$  )

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAMS
3.00 76.2	2.50 63.5	0.85 21.6	0.28 7.1	0.50 12.7	2.200 55.88	2.700 68.58	0.188 4.76	2.50 63.5	2.125 53.98	0.188 4.76	0.144 3.66	3.75 95.3	3.375 85.72	0.100 2.54	200

## Connections

RF IN	(SMA female)
RF OUT	(SMA female)
USB	(USB type Mini-B female)
Network (Ethernet/LAN)	(RJ45 socket)







## Bracket Option

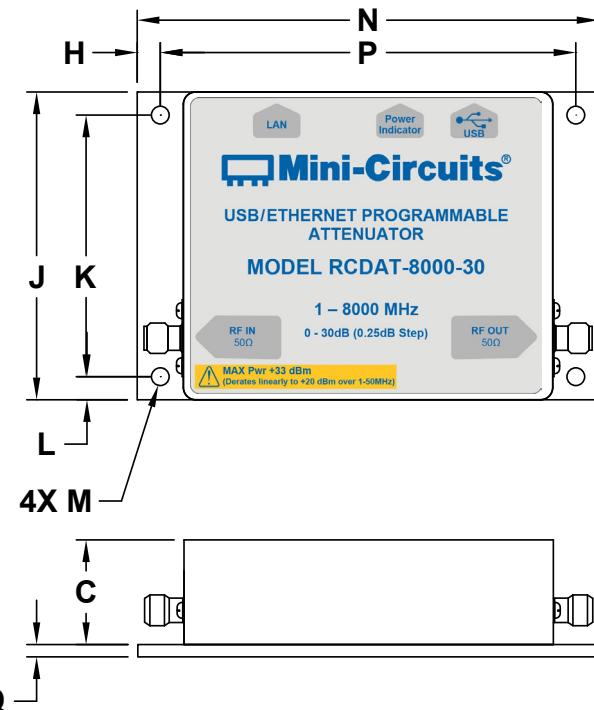







## Instruction for mounting bracket:

1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

## Typical Performance Curves

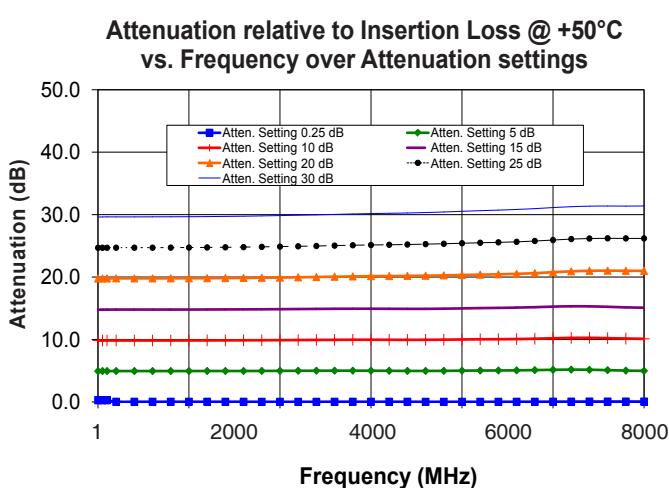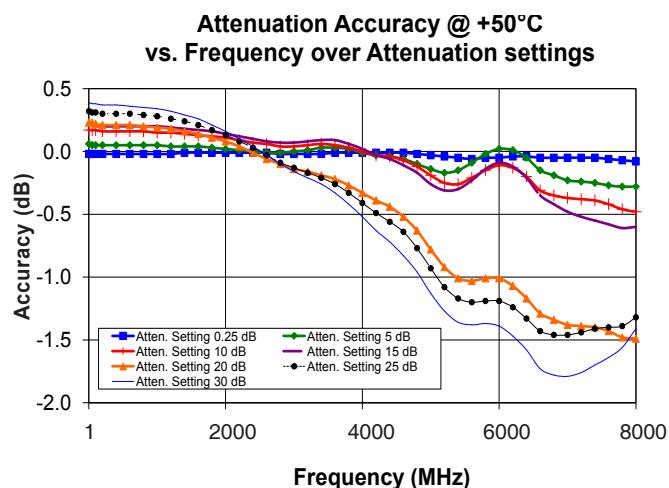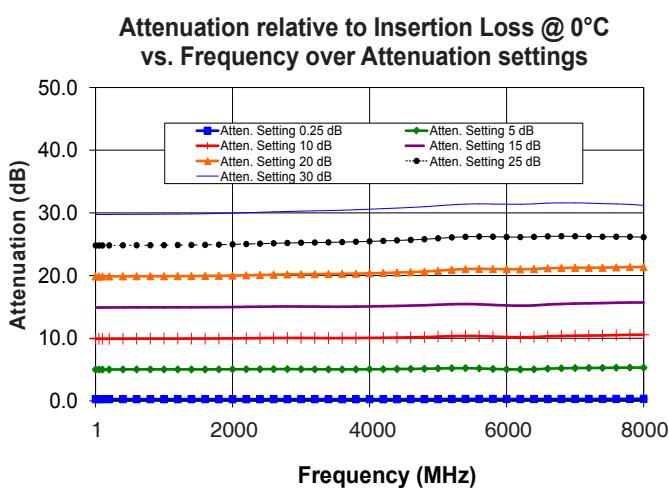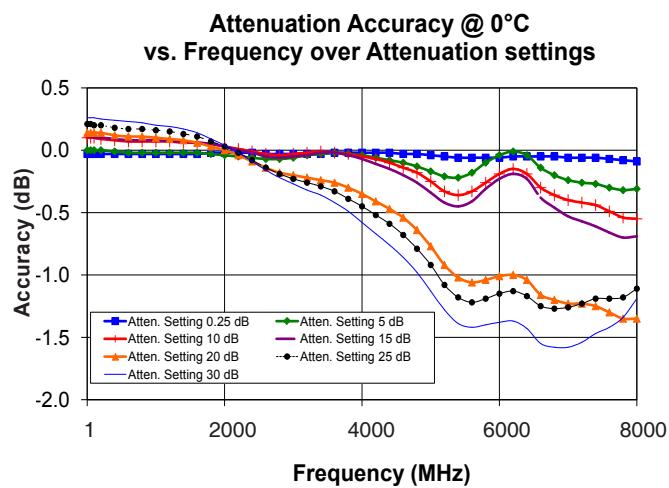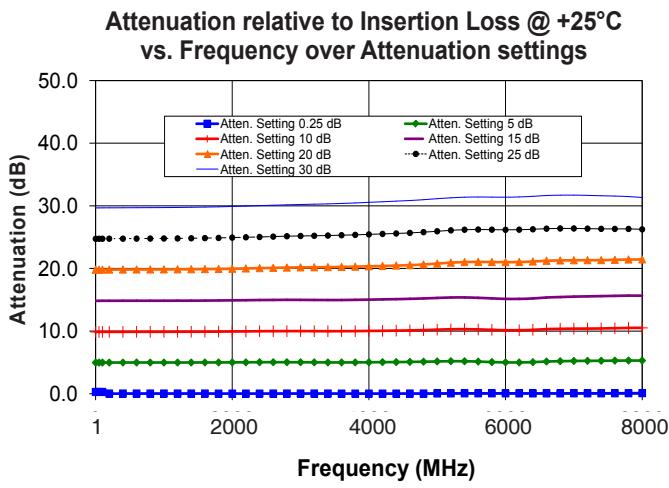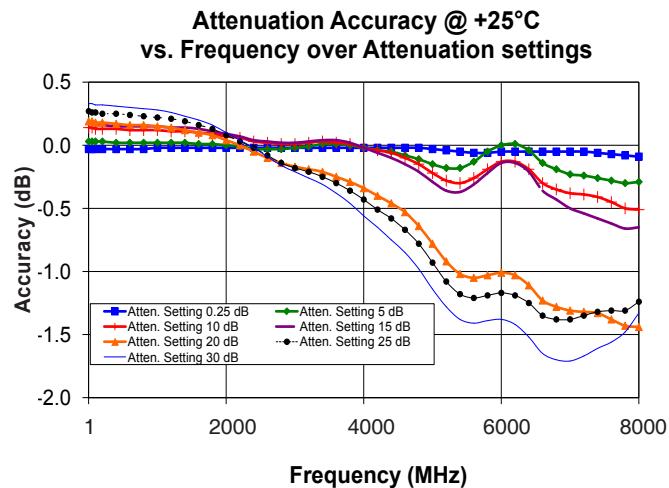

## Typical Performance Curves (Continued)

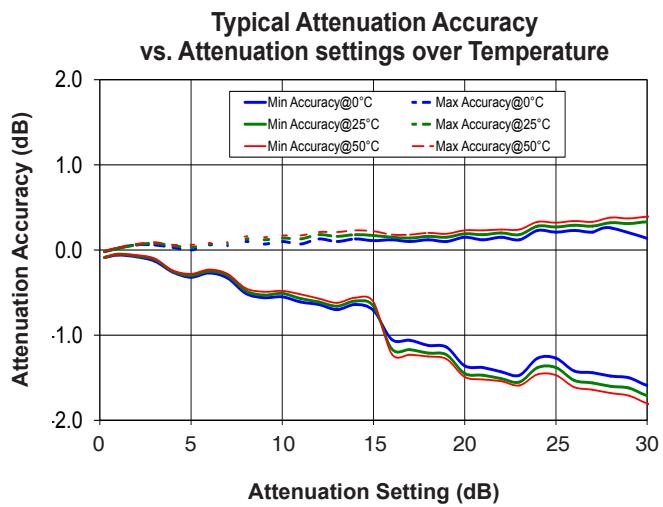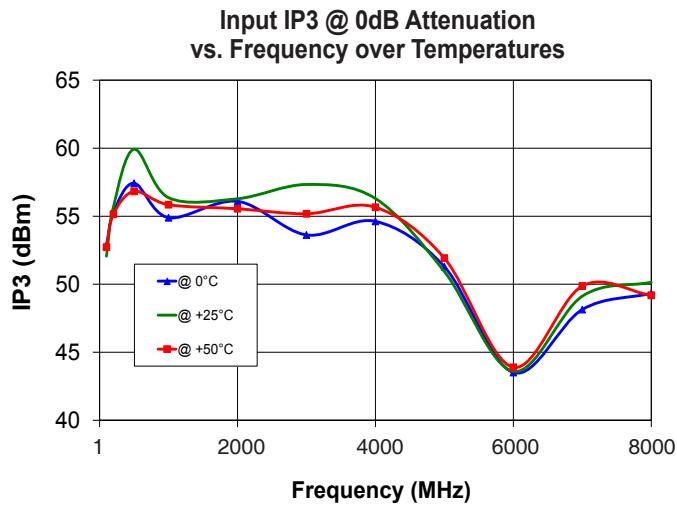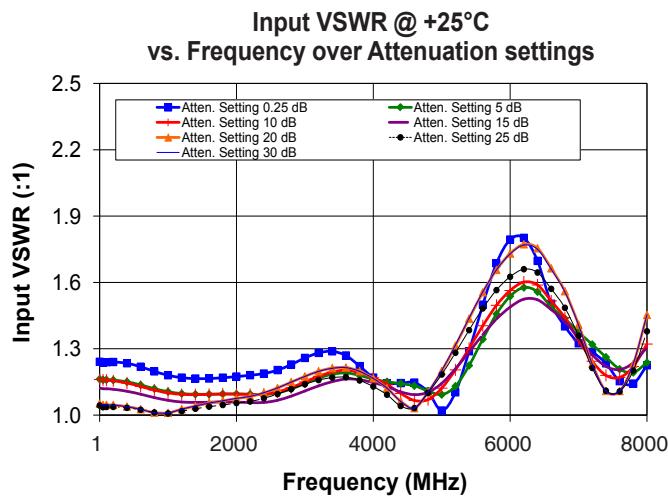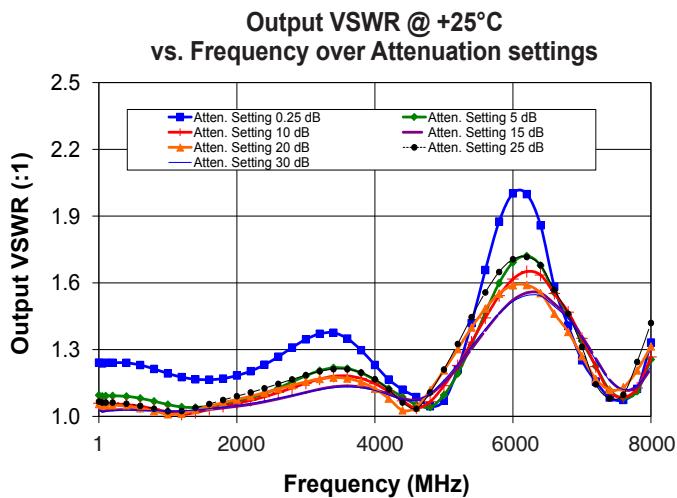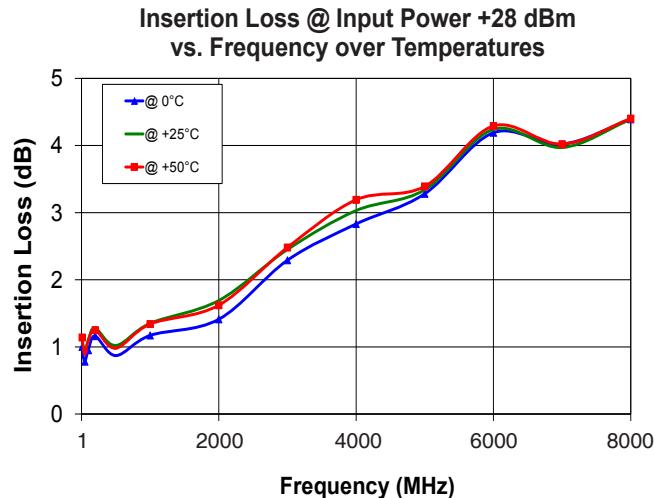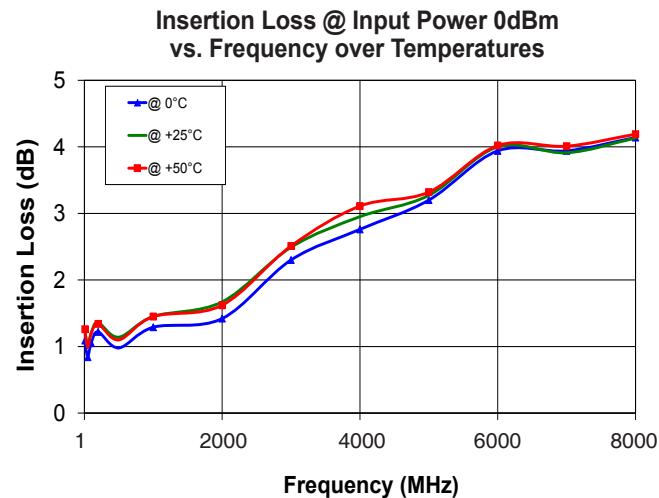

**Ordering Information**

<b>Model</b>	<b>Description</b>
RCDAT-8000-30	USB / Ethernet Programmable Attenuator

<b>Included Accessories</b>	<b>Part No.</b>	<b>Description</b>
	USB-AC/DC-5+	AC/DC Power Adapter with US, EU, IL, UK, AUS, and China two pin power plugs <sup>9,10</sup> . Operating temperature: 0°C to +45°C, AC Input: 100-240V, 47-63 Hz, DC Output 5±0.25 V, I <sub>Max</sub> =1A
	MUSB-CBL-3+	2.6 ft (0.8 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)

<sup>9</sup> The USB-AC/DC-5 may be used to provide the 5V<sub>DC</sub> power input via USB port if operating the RCDAT with Ethernet control. Not required if using USB control.

<sup>10</sup> Power plugs for other countries are also available. Plugs for other countries are also available, if you need a power plug for a country not listed please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

<b>Optional Accessories</b>	<b>Description</b>
USB-AC/DC-5 (spare)	AC/DC 5V <sub>DC</sub> Power Adapter with US, EU, IL, UK, AUS, and China power plugs
MUSB-CBL-3+ (spare)	2.6 ft (0.8 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)
MUSB-CBL-7+	6.6 ft (2.0 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)
PC-DAT-CD	Software CD <sup>11</sup>
BKT-66-02+	Bracket kit including 3.75" x 2.50" bracket, mounting screws and washers

<sup>11</sup> To receive the CD at no extra cost, request when placing order. CD contents can be downloaded from Mini-Circuits website at <http://www.minicircuits.com/softwaredownload/patt.html>

**Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

