Surface Mount

Power Splitter/Combiner

AD4PS-1+

4 Way-0° 50Ω 1 to 500 MHz



CASE STYLE: CJ725
PRICE: $14.95 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	2
PORT 1	8
PORT 2	7
PORT 3	6
PORT 4	5
GROUND	1,3,4

Features

- wideband, 1-500 MHz
- high isolation, 30 dB typ.
- good input port matching VSWR, 1.12 typ.
- good output port matching VSWR, 1.10 typ.
- small surface mount package

Applications

- VHF-TV
- aircraft communications

Outline Drawing





Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	
.345	.400	.385	.435	.310	.215	.100	
8.76	10.16	9.78	11.05	7.87	5.46	2.54	
H	**J**	**K**	**L**	**M**	**N**	**P**	**wt**
.015	.025	.035	.075	.120	.060	.420	grams
0.38	0.64	0.89	1.91	3.05	1.52	10.67	0.45

Demo Board MCL P/N: TB-81
Suggested PCB Layout (PL-072)

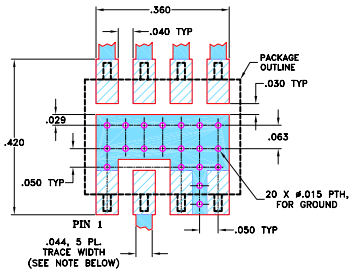

NOTES: 1.TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2.BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 6.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
f_L-f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-500	32	18	30	20	25	18	0.4	1.2	0.5	1.2	0.8	1.8	2	5	7	0.4	0.5	0.8

L = 1-10MHz M = 10-250MHz U= 250-500MHz

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1.00	6.59	6.59	6.59	6.59	0.01	28.61	46.82	30.70	0.02	1.20	1.31	1.31	1.30	1.28
5.00	6.38	6.42	6.38	6.38	0.04	33.63	54.15	34.52	0.05	1.10	1.15	1.15	1.15	1.13
9.00	6.37	6.42	6.37	6.37	0.05	34.35	52.09	34.63	0.08	1.08	1.12	1.12	1.12	1.10
10.00	6.38	6.42	6.38	6.38	0.04	34.41	51.62	34.60	0.09	1.08	1.12	1.12	1.11	1.10
40.00	6.42	6.47	6.43	6.43	0.04	33.14	40.57	32.89	0.28	1.08	1.11	1.11	1.11	1.09
70.00	6.47	6.50	6.46	6.46	0.04	31.60	36.15	31.47	0.52	1.09	1.10	1.11	1.11	1.09
100.00	6.49	6.53	6.49	6.49	0.04	30.28	33.28	30.23	0.71	1.11	1.10	1.10	1.11	1.09
150.00	6.58	6.61	6.56	6.56	0.05	28.63	30.21	28.64	1.04	1.12	1.09	1.10	1.10	1.08
200.00	6.65	6.68	6.62	6.62	0.05	27.48	28.12	27.52	1.47	1.14	1.07	1.08	1.09	1.07
250.00	6.68	6.71	6.63	6.62	0.09	26.98	26.73	27.02	1.66	1.14	1.05	1.07	1.09	1.06
300.00	6.76	6.80	6.71	6.70	0.10	27.10	25.83	27.23	1.99	1.13	1.04	1.06	1.09	1.06
350.00	6.81	6.83	6.70	6.68	0.15	28.13	25.41	28.36	2.08	1.09	1.04	1.06	1.09	1.06
400.00	6.84	6.90	6.73	6.68	0.21	30.62	25.41	30.49	2.21	1.05	1.07	1.08	1.12	1.09
450.00	6.95	6.98	6.76	6.73	0.26	36.71	25.89	31.30	2.54	1.05	1.11	1.11	1.16	1.12
500.00	7.08	7.15	6.83	6.77	0.38	39.78	26.85	27.20	3.34	1.13	1.14	1.15	1.21	1.17

AD4PS-1+
INSERTION LOSS

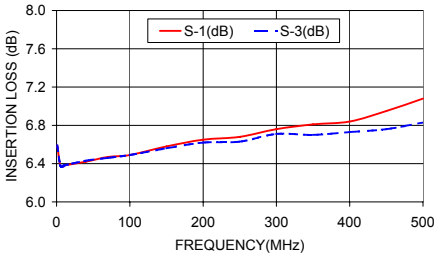

AD4PS-1+
ISOLATION

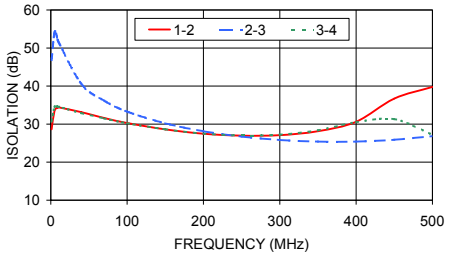

AD4PS-1+
VSWR

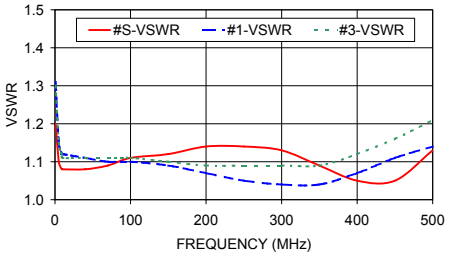

electrical schematic

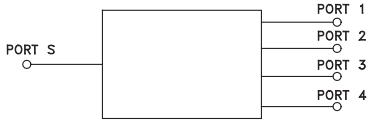

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. G
M121747
ED-7705/1
AD4PS-1+
HY/TD/CP/AM
091207