

Surface Mount Directional Coupler

75Ω 20 to 1000 MHz

ADC-12-4-75+
ADC-12-4-75



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
75Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

Outline Drawing

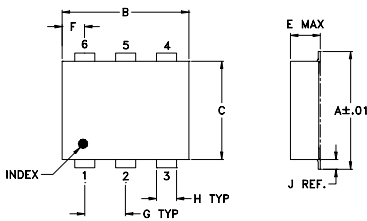


PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-08 Suggested PCB Layout (PL-042)

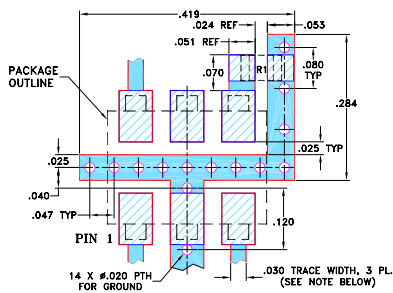

- RESISTOR R1: 75 Ohm, 0805 SIZE.
- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 20-1000 MHz
- low mainline loss, 0.9 db typ.
- good directivity, 23 dB typ.
- good VSWR, 1.2:1 typ.
- excellent coupling flatness, ±0.1 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

Applications

- cable tv

CASE STYLE: CD542
PRICE: \$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Flatness	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.		L Max.	MU Max.						
f _c -f _u																	
20-1000	12.6±0.5	±0.5	0.8	1.2	0.9	1.3	1.2	1.8	28	20	23	15	17	10	1.2	1.0	1.0

L= 20-200 MHz M= 200-500 MHz U= 500-1000 MHz
1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
	In-Out				In	Out	Cpl
20.00	0.79		12.57	29.56	21.10	28.80	21.67
128.88	0.83		12.57	27.28	22.02	31.66	22.60
237.77	0.88		12.59	25.42	22.65	30.27	23.48
346.66	0.89		12.58	23.17	22.53	27.89	25.13
455.55	0.94		12.61	21.41	24.48	26.33	27.78
564.44	0.97		12.59	19.76	24.67	25.28	30.58
673.33	1.06		12.61	18.47	24.46	24.46	33.77
782.22	1.15		12.65	17.23	24.58	24.36	27.91
891.11	1.25		12.64	16.05	24.75	24.23	44.40
1000.00	1.36		12.63	14.72	24.40	23.10	43.64


ADC-12-4-75
MAINLINE LOSS

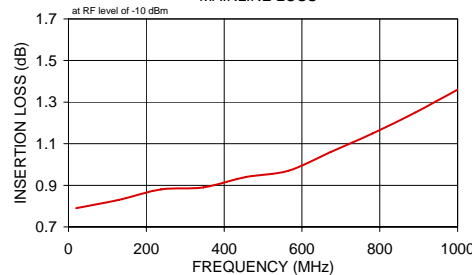


ADC-12-4-75
COUPLING & DIRECTIVITY

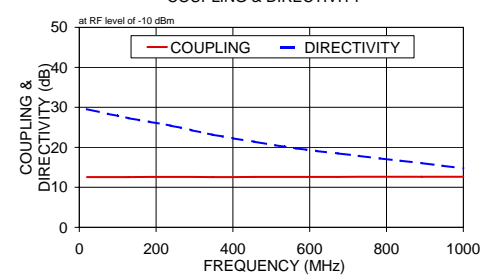

ADC-12-4-75
RETURN LOSS

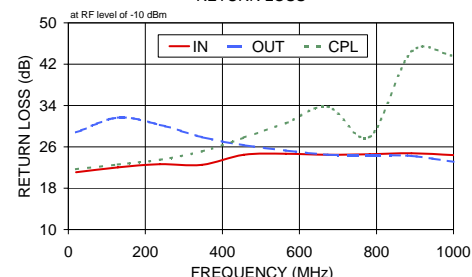

Electrical Schematic

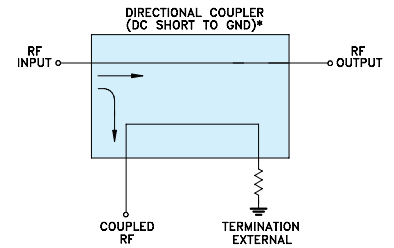

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

For detailed performance specs & shipping online see web site

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine
IF/RF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M119986
ED-7093/1
ADC-12-4-75
WZ/TD/CP/AM
090903