Surface Mount

Voltage Controlled Oscillator

ROS-1631-119+

5V Tuning for PLL IC's 1460 to 1631 MHz

Features

- Low phase noise
- Low pulling
- Low pushing
- Aqueous washable

Applications

- Wireless communications
- Military

CASE STYLE: CK605
PRICE: $19.95 ea. QTY (5-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz Typ.				TUNING VOLTAGE RANGE (V)		SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc (volts)	DC OPERATING POWER Current (mA)
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.		Max.
ROS-1631-119+	1460	1631	0	-74	-101	-122	-142	0.5	5	59 - 78	20	170	-90	-21	-12	2	0.5	5	28

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

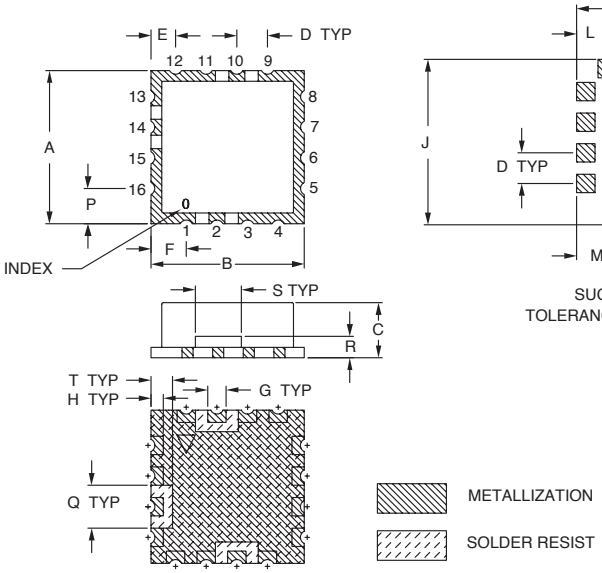

PCB Land Pattern

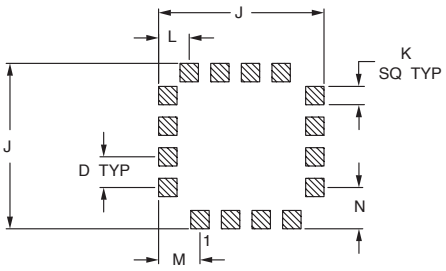

SUGGESTED LAYOUT,
TOLERANCE TO BE WITHIN ±.002

Demo Board MCL P/N: TB-10
Suggested PCB Layout (PL-012)

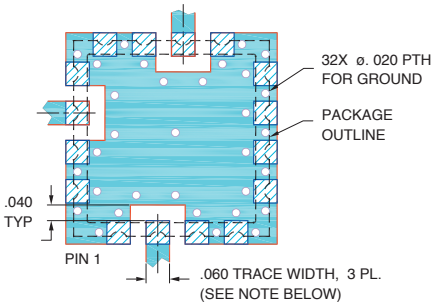

NOTES:
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .030" ± .002"'; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

REV. OR
M108350
EDR-8279/1F1
ROS-1631-119+
RAV
090820

Performance Data & Curves*

ROS-1631-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1546 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	134.59	1366.8	1343.4	1327.2	-0.58	-0.20	-0.48	21.58	-21.8	-21.5	-27.1	7.28	2.65	-66.8	-94.3	-116.4	-136.8	1.0	-74.73
0.50	99.09	1422.9	1404.9	1392.0	-0.61	0.01	0.17	22.21	-21.8	-20.4	-26.4	2.73	1.53	-69.9	-99.0	-120.9	-140.9	2.0	-82.07
0.75	89.34	1446.4	1429.6	1417.5	-0.51	0.11	0.20	22.39	-22.6	-19.8	-26.0	1.81	2.75	-71.1	-99.1	-121.8	-141.5	3.5	-89.46
1.00	82.51	1467.9	1452.0	1440.5	-0.51	0.18	0.34	22.57	-23.1	-19.6	-25.6	1.18	2.82	-73.5	-100.5	-122.2	-142.5	6.0	-96.22
1.25	77.64	1487.9	1472.6	1461.5	-0.57	0.17	0.36	22.71	-23.4	-20.1	-25.2	0.74	1.63	-75.3	-100.4	-122.3	-142.3	8.5	-100.24
1.50	73.87	1507.0	1492.0	1481.1	-0.60	0.12	0.33	22.82	-25.4	-20.8	-25.1	0.41	1.49	-74.8	-101.3	-122.6	-142.6	10.0	-101.10
1.75	70.96	1525.2	1510.5	1499.8	-0.55	0.08	0.31	22.90	-25.7	-20.3	-24.7	0.14	2.63	-73.9	-101.7	-122.8	-142.8	20.8	-108.52
2.00	68.11	1542.7	1528.2	1517.7	-0.48	0.15	0.28	22.99	-26.2	-20.0	-24.2	0.08	3.00	-73.3	-101.3	-122.9	-142.9	35.5	-113.45
2.25	65.65	1559.5	1545.2	1534.9	-0.48	0.21	0.36	23.08	-27.3	-20.7	-24.1	0.26	1.99	-74.7	-101.4	-122.8	-143.0	60.7	-117.79
2.50	63.81	1575.7	1561.7	1551.4	-0.53	0.20	0.39	23.14	-27.3	-20.7	-23.6	0.41	1.61	-74.2	-100.8	-122.8	-143.2	86.7	-121.60
2.75	62.28	1591.6	1577.6	1567.4	-0.54	0.16	0.37	23.18	-27.7	-21.1	-23.2	0.53	2.24	-73.3	-101.7	-122.8	-143.4	100.0	-122.96
3.00	60.65	1607.0	1593.2	1583.0	-0.59	0.14	0.34	23.20	-28.4	-21.2	-23.3	0.63	2.98	-74.9	-100.5	-122.3	-143.0	148.1	-126.28
3.25	59.64	1622.1	1608.3	1598.3	-0.68	0.09	0.30	23.22	-28.5	-21.4	-23.4	0.70	3.12	-74.2	-101.7	-122.9	-143.1	177.0	-127.69
3.50	58.61	1636.9	1623.2	1613.2	-0.75	-0.02	0.23	23.21	-28.2	-21.1	-24.2	0.77	2.36	-74.5	-101.3	-122.6	-142.7	211.6	-129.28
3.75	58.25	1651.6	1637.9	1627.9	-0.74	-0.10	0.11	23.19	-28.7	-21.1	-25.2	0.82	1.68	-73.6	-100.9	-122.6	-143.1	302.4	-132.55
4.00	56.94	1665.9	1652.5	1642.5	-0.79	-0.10	0.06	23.19	-29.1	-20.9	-26.6	0.88	1.76	-74.0	-101.1	-122.5	-142.8	361.5	-134.15
4.25	56.34	1680.0	1666.7	1656.9	-0.87	-0.14	0.06	23.18	-28.4	-20.3	-28.6	0.92	2.69	-74.0	-100.0	-122.2	-142.3	507.5	-137.05
4.50	55.93	1694.0	1680.8	1671.0	-0.98	-0.21	0.04	23.15	-28.7	-20.0	-30.0	0.96	3.33	-74.1	-99.9	-122.1	-142.0	606.7	-138.69
4.75	55.76	1708.1	1694.8	1685.0	-1.06	-0.30	-0.04	23.12	-28.3	-19.0	-31.0	1.00	2.90	-75.4	-100.2	-121.9	-141.9	851.6	-141.50
5.00	54.81	1722.0	1708.7	1698.7	-1.15	-0.35	-0.10	23.10	-27.7	-18.7	-31.6	1.07	2.27	-75.7	-100.7	-121.4	-141.9	1000.0	-142.96

*at 25°C unless mentioned otherwise

ROS-1631-119+
Frequency and Tuning Sensitivity

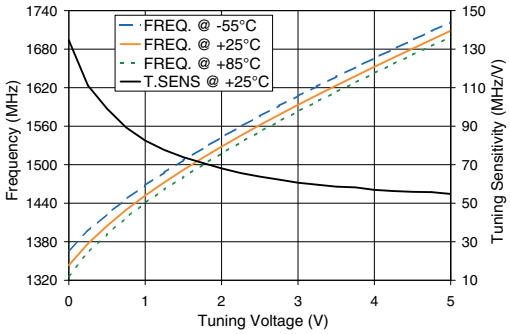

ROS-1631-119+
Power Output

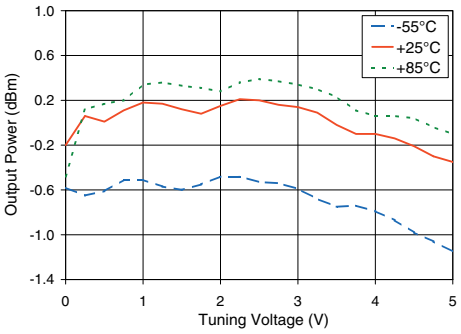

ROS-1631-119+
Harmonics Level

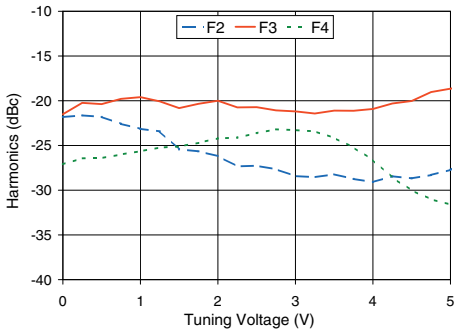

ROS-1631-119+
Frequency Pulling & Pushing (Vcc ± 5%)

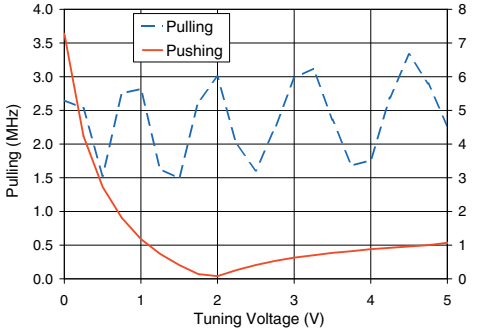

ROS-1631-119+
Phase Noise Vs. Tuning Voltage

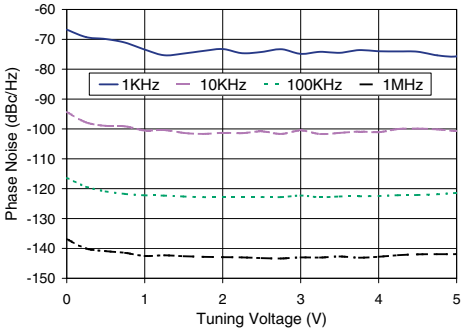

ROS-1631-119+
Phase Noise