

# Surface Mount Directional Coupler

50Ω 5 to 1000 MHz

ADC-20-4+  
ADC-20-4



## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

## Outline Drawing

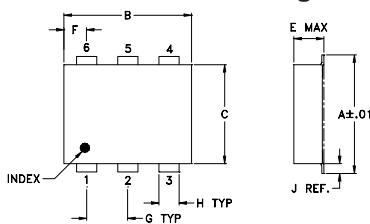

## PCB Land Pattern




## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

## Demo Board MCL P/N: TB-05 Suggested PCB Layout (PL-095)

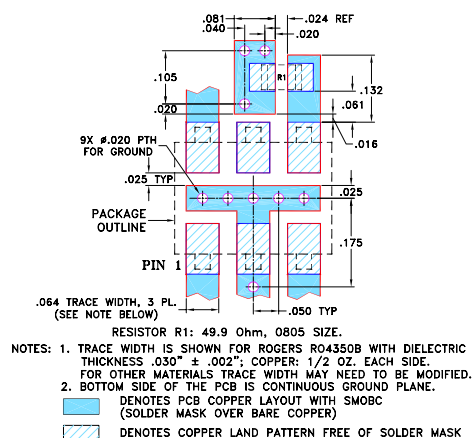

## Features

- wideband, 5-1000 MHz
- low mainline loss, 0.5 dB typ.
- high directivity, 21 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

## Applications

- cable tv
- communications

CASE STYLE: CD542

PRICE:\$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

## Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Flatness	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.		L Max.	MU Max.						
f <sub>L</sub> -f <sub>U</sub>																	
5-1000	20.0±0.5	±0.8	0.4	0.8	0.5	1.0	0.7	1.3	20	18	21	17	21	15	1.1	1.0	1.0

L= 5-50 MHz M= 50-500 MHz U= 500-1000 MHz


1. Mainline loss includes theoretical power loss at coupled port.

## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.35	19.49	21.07	26.82	28.08	23.37
10.00	0.32	19.55	20.63	30.04	32.37	26.49
50.00	0.32	19.62	20.64	32.99	37.40	30.48
150.00	0.37	19.68	21.01	33.06	35.38	30.96
250.00	0.38	19.80	21.28	34.14	34.19	31.95
350.00	0.40	19.89	21.32	34.05	31.30	32.90
500.00	0.45	20.05	21.18	36.20	31.48	34.55
750.00	0.53	20.28	20.90	31.32	31.73	34.59
870.00	0.53	20.31	20.71	28.29	31.27	31.88
1000.00	0.68	20.49	20.03	25.43	28.94	28.09

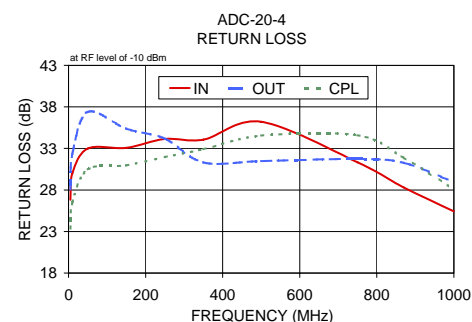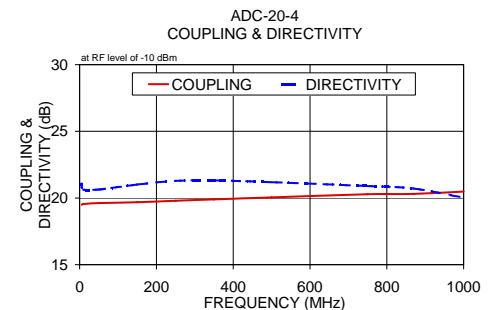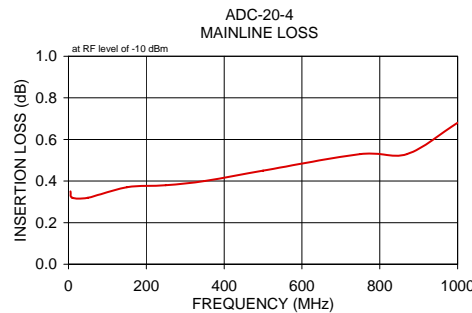

## Electrical Schematic

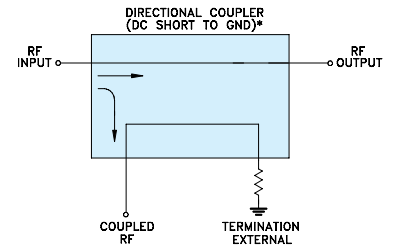

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

For detailed performance specs & shipping online see web site

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
The Design Engineers Search Engine  
IF/RF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. D  
M119986  
ED-6676/2  
ADC-20-4  
WZ/TD/CP/AM  
090903