

High Power Bi-Directional Coupler

SYBD-16-53HP+

50Ω 16dB Coupling DC Pass 2700 to 5000 MHz



Maximum Ratings



Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	2A

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	2
COUPLED (forward)	4
COUPLED (reverse)	3
GROUND	5

Outline Drawing

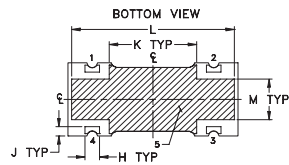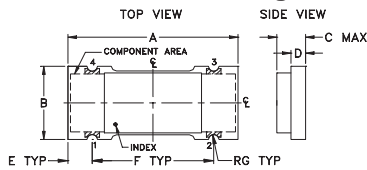

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.70	.32	.13	.060	.100	.500	.022
17.78	8.13	3.30	1.52	2.54	12.70	0.56
H	J	K	L	M	wt	
.060	.040	.360	.670	.175	grams	
1.52	1.02	9.14	17.02	4.45	0.68	

Demo Board MCL P/N: TB-398
Suggested PCB Layout (PL-260)

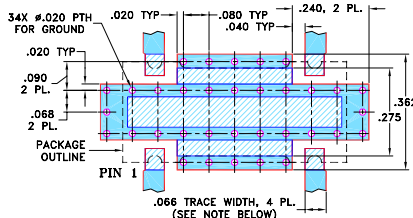

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- Denotes PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- Denotes COPPER LAND PATTERN FREE OF SOLDER MASK

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine

Features

- high power handling, 25 watts typ.
- low mainline loss, 0.2 dB typ.
- excellent VSWR, 1.2:1 typ.
- good directivity 20 dB typ.
- wideband frequency, 2700 to 5000 MHz

Applications

- instrumentation
- ISM
- defense communications
- federal communications
- fixed satellite




Bi-Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT (W)
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
$f_c - f_u$								
2700-5000			0.20	0.70	18	10	1.20	
2700-3000	18.1±0.8	±0.5	0.12	0.40	20	13	1.15	25
3000-3600	17.4±0.8	±0.7	0.15	0.45	18	13	1.15	25
3600-4500	16.3±0.7	±0.7	0.20	0.50	16	11	1.25	20
4500-5000	15.7±0.7	±0.3	0.24	0.70	15	10	1.30	20


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
2700.00	0.12	18.87	18.56	20.62	20.02	24.50	25.16	27.41	27.68
3000.00	0.12	17.99	17.98	20.06	19.20	24.97	25.28	24.97	25.23
3400.00	0.15	17.27	17.29	18.87	17.96	27.86	26.90	23.35	22.99
3600.00	0.16	16.91	17.01	18.20	17.23	31.91	30.03	23.99	23.80
3800.00	0.17	16.66	16.70	17.69	16.80	41.81	36.07	25.52	25.46
4000.00	0.17	16.44	16.44	16.92	16.36	37.46	38.04	28.89	28.82
4200.00	0.18	16.27	16.24	16.62	16.21	31.72	31.57	34.93	36.47
4500.00	0.20	16.08	16.05	16.76	16.62	28.61	27.86	34.67	36.13
4800.00	0.23	15.93	15.91	17.53	17.49	27.69	26.78	28.61	28.44
5000.00	0.24	15.90	15.87	17.58	17.84	27.32	26.23	26.99	26.29

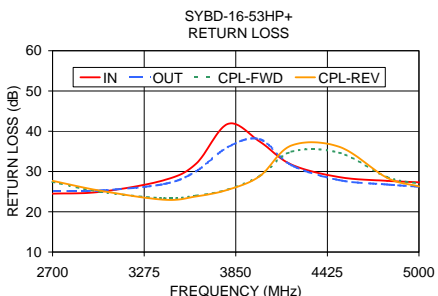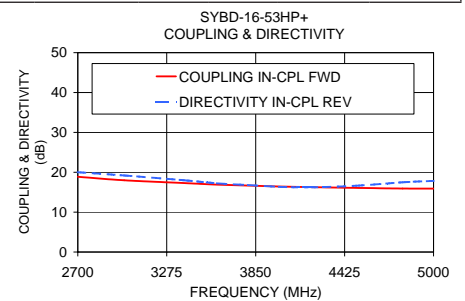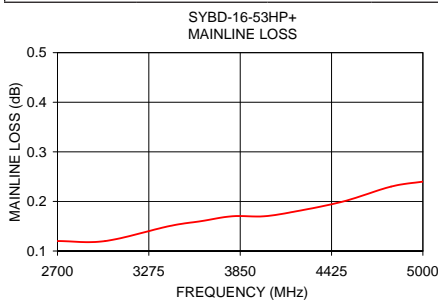

Electrical Schematic

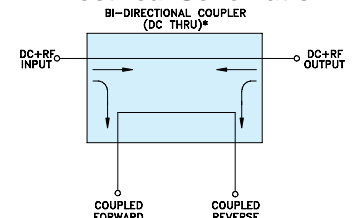

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

For detailed performance specs & shipping online see web site

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine



Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M119986
ED-12832/1
SYBD-16-53HP+
WZ/QL/AM
090911