

Precision

Digital Step Attenuator

ZFAT-R512

50Ω TTL Control, Pin Diode 10 to 1000 MHz

Maximum Ratings

| | |
|-----------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 125°C |
| Input Power | 15 dBm |
| DC Voltage | 5.5 V |
| TTL | 5.5V |

Permanent damage may occur if any of these limits are exceeded.

Features

- wideband, 10 to 1000 MHz
- excellent step accuracy, 0.2 dB typ.
- small, shielded metal case

Applications

- base stations
- cellular
- test sets



CASE STYLE: SSS173

| Connectors | Model | Price | Qty. |
|----------------------|-----------|---------|-------|
| SMA | ZFAT-R512 | \$89.95 | (1-9) |
| BRACKET (OPTION "B") | | \$2.50 | (1+) |

Digital Step Attenuator Electrical Specifications


| MODEL NO. | FREQUENCY (MHz) | | PRIMARY ATTENUATION STEPS (dB) | | | ATTENUATION (dB) | | VSWR (:1) | | |
|-----------|-----------------|-------|--------------------------------|--------|--------|-------------------|-----------------|-----------|-----|-----|
| | f_L | f_U | #1 | #2 | #3 | (1,1,1)** Nom. | (0,0,0) Max. | L | M | U |
| ZFAT-R512 | 10 | 1000 | 0.5±0.18 | 1±0.25 | 2±0.25 | 3.5 | 4.0 | 1.6 | 1.4 | 1.5 |

L=10 to 100 MHz M=100 to 500 MHz U=500 to 1000 MHz

** Total attenuation above thru-loss.

1. Step accuracy is specified for basic steps. For combination of steps accuracy is additive.
2. Thru-loss is minimum insertion loss with all attenuation elements bypassed (All TTL controls state are Low)

Outline Drawing

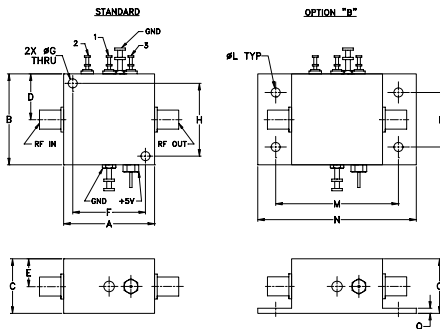

Outline Dimensions (inch/mm)

| | | | | | | | |
|-------|-------|-------|-------|-------|-------|------|-------|
| A | B | C | D | E | F | G | H |
| 1.25 | 1.25 | 0.75 | .63 | .38 | 1.000 | .125 | 1.000 |
| 31.75 | 31.75 | 19.05 | 16.00 | 9.65 | 25.40 | 3.18 | 25.40 |
| J | K | L | M | N | P | Q | wt |
| -- | -- | .125 | 1.688 | 2.18 | .75 | .07 | grams |
| -- | -- | 3.18 | 42.88 | 55.37 | 19.05 | 1.78 | 75 |

Additional Specifications

| | |
|---|---|
| DC Voltage | +5V |
| DC Current | 12mA max. |
| Switching Time (50% TTL to within specified accuracy of the next-selected attenuation step, and to within 0.1 dB of steady-state Thru-Loss) | 10μs typ., 15μs max., |
| TTL Input High Threshold | 2V min |
| TTL Input Low Threshold | 0.8V max. |
| TTL Toggle Rate | 50 kHz typ. |
| 1dB Compression | 0 dBm (10-100 MHz) +10 dBm (100-1000MHz) |

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com




IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M97802
ZFAT-R512
DJ/VV/CP
070606

ZFAT-R512

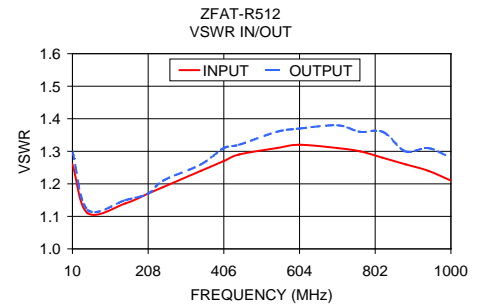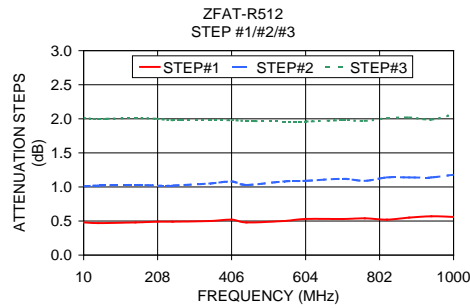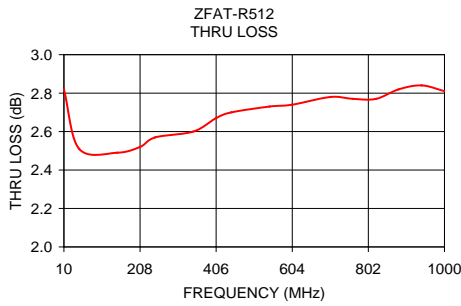

Step Attenuation* at TTL Control State

| FREQ. | 000 | 001 | 010 | 011 | 100 | 101 | 110 | 111 |
|---------|----------------|------|------|------|------|------|------|------|
| (MHz) | THRU LOSS (dB) | 0.5 | 1.0 | 1.5 | 2.0 | 2.5 | 3.0 | 3.5 |
| 10.00 | 2.82 | 0.48 | 1.01 | 1.49 | 2.01 | 2.49 | 3.01 | 3.51 |
| 49.60 | 2.51 | 0.47 | 1.02 | 1.51 | 2.00 | 2.49 | 3.06 | 3.53 |
| 148.60 | 2.49 | 0.48 | 1.03 | 1.49 | 2.01 | 2.51 | 3.05 | 3.50 |
| 208.00 | 2.52 | 0.49 | 1.02 | 1.51 | 2.00 | 2.50 | 3.03 | 3.48 |
| 247.60 | 2.57 | 0.49 | 1.02 | 1.51 | 1.98 | 2.48 | 3.02 | 3.50 |
| 346.60 | 2.60 | 0.50 | 1.05 | 1.54 | 1.98 | 2.49 | 3.02 | 3.51 |
| 406.00 | 2.67 | 0.52 | 1.08 | 1.57 | 1.98 | 2.47 | 3.04 | 3.53 |
| 445.60 | 2.70 | 0.48 | 1.03 | 1.55 | 1.97 | 2.48 | 3.02 | 3.51 |
| 544.60 | 2.73 | 0.50 | 1.08 | 1.57 | 1.96 | 2.49 | 3.04 | 3.54 |
| 604.00 | 2.74 | 0.53 | 1.09 | 1.60 | 1.96 | 2.52 | 3.07 | 3.57 |
| 703.00 | 2.78 | 0.53 | 1.12 | 1.66 | 1.98 | 2.54 | 3.08 | 3.61 |
| 762.40 | 2.77 | 0.54 | 1.09 | 1.62 | 1.97 | 2.50 | 3.06 | 3.57 |
| 821.80 | 2.77 | 0.52 | 1.14 | 1.68 | 2.01 | 2.55 | 3.10 | 3.66 |
| 881.20 | 2.82 | 0.55 | 1.14 | 1.70 | 2.02 | 2.57 | 3.12 | 3.70 |
| 940.60 | 2.84 | 0.57 | 1.14 | 1.70 | 1.99 | 2.59 | 3.14 | 3.73 |
| 1000.00 | 2.81 | 0.56 | 1.18 | 1.71 | 2.07 | 2.62 | 3.18 | 3.76 |

INPUT VSWR

| FREQ. | 001 | 010 | 011 | 100 | 101 | 110 | 111 |
|---------|------|------|------|------|------|------|------|
| (MHz) | | | | | | | |
| 10.00 | 1.26 | 1.26 | 1.24 | 1.27 | 1.25 | 1.25 | 1.23 |
| 49.60 | 1.11 | 1.10 | 1.10 | 1.10 | 1.10 | 1.10 | 1.09 |
| 148.60 | 1.14 | 1.14 | 1.14 | 1.13 | 1.13 | 1.13 | 1.13 |
| 208.00 | 1.17 | 1.17 | 1.17 | 1.15 | 1.16 | 1.16 | 1.16 |
| 247.60 | 1.19 | 1.20 | 1.20 | 1.17 | 1.18 | 1.18 | 1.19 |
| 346.60 | 1.24 | 1.25 | 1.25 | 1.22 | 1.23 | 1.23 | 1.24 |
| 406.00 | 1.27 | 1.28 | 1.28 | 1.24 | 1.25 | 1.27 | 1.27 |
| 445.60 | 1.29 | 1.30 | 1.30 | 1.26 | 1.27 | 1.29 | 1.29 |
| 544.60 | 1.31 | 1.33 | 1.33 | 1.29 | 1.30 | 1.32 | 1.33 |
| 604.00 | 1.32 | 1.34 | 1.34 | 1.30 | 1.31 | 1.34 | 1.34 |
| 703.00 | 1.31 | 1.34 | 1.33 | 1.30 | 1.31 | 1.35 | 1.35 |
| 762.40 | 1.30 | 1.33 | 1.33 | 1.30 | 1.31 | 1.34 | 1.35 |
| 821.80 | 1.28 | 1.32 | 1.31 | 1.29 | 1.30 | 1.34 | 1.34 |
| 881.20 | 1.26 | 1.30 | 1.30 | 1.28 | 1.28 | 1.33 | 1.32 |
| 940.60 | 1.24 | 1.28 | 1.27 | 1.26 | 1.26 | 1.31 | 1.31 |
| 1000.00 | 1.21 | 1.25 | 1.25 | 1.23 | 1.25 | 1.29 | 1.29 |

OUTPUT VSWR

| FREQ. | 001 | 010 | 011 | 100 | 101 | 110 | 111 |
|---------|------|------|------|------|------|------|------|
| (MHz) | | | | | | | |
| 10.00 | 1.30 | 1.27 | 1.27 | 1.22 | 1.21 | 1.20 | 1.20 |
| 49.60 | 1.12 | 1.12 | 1.12 | 1.09 | 1.09 | 1.09 | 1.09 |
| 148.60 | 1.15 | 1.15 | 1.16 | 1.12 | 1.11 | 1.11 | 1.11 |
| 208.00 | 1.17 | 1.18 | 1.18 | 1.12 | 1.13 | 1.12 | 1.14 |
| 247.60 | 1.21 | 1.21 | 1.21 | 1.14 | 1.15 | 1.15 | 1.15 |
| 346.60 | 1.26 | 1.27 | 1.29 | 1.18 | 1.19 | 1.20 | 1.20 |
| 406.00 | 1.31 | 1.33 | 1.33 | 1.22 | 1.23 | 1.24 | 1.23 |
| 445.60 | 1.32 | 1.32 | 1.34 | 1.22 | 1.23 | 1.25 | 1.26 |
| 544.60 | 1.36 | 1.37 | 1.38 | 1.25 | 1.25 | 1.28 | 1.28 |
| 604.00 | 1.37 | 1.39 | 1.39 | 1.26 | 1.26 | 1.31 | 1.28 |
| 703.00 | 1.38 | 1.41 | 1.41 | 1.26 | 1.26 | 1.29 | 1.29 |
| 762.40 | 1.36 | 1.39 | 1.39 | 1.28 | 1.27 | 1.29 | 1.29 |
| 821.80 | 1.36 | 1.39 | 1.39 | 1.28 | 1.26 | 1.30 | 1.28 |
| 881.20 | 1.30 | 1.37 | 1.37 | 1.25 | 1.23 | 1.27 | 1.26 |
| 940.60 | 1.31 | 1.37 | 1.35 | 1.23 | 1.23 | 1.26 | 1.26 |
| 1000.00 | 1.28 | 1.33 | 1.32 | 1.22 | 1.22 | 1.24 | 1.26 |

* Step attenuation above thru-loss (TTL logic 000)



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.