

Power Detector

ZX47-40+ ZX47-40LN+

50Ω, -40dBm to +20dBm, 10 to 8000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Power:	
Max. voltage	5.7V
Max. current	120mA
Internal Power Dissipation	0.73W
Input Power	+27dBm

Coaxial Connections

RF IN	1
DC OUT	5
Vcc (+5V)	2
TEMPERATURE SENSOR	4
GROUND	3


Outline Drawing

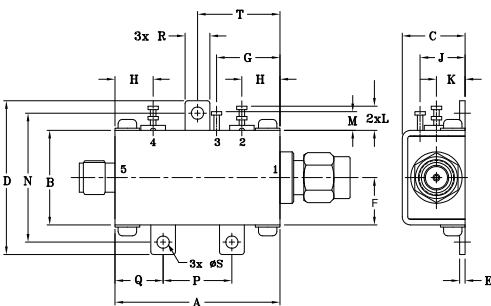

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
1.20	.69	.46	1.12	.04	.34	.46	.28	.33	.21
30.5	17.5	11.6	28.4	1.0	8.7	11.7	7.1	8.3	5.3
L	M	N	P	Q	R	S	T	wt.	
.18	.14	.94	.50	.35	.18	.09	.60	grams	
4.5	3.5	23.8	12.7	8.9	4.6	2.3	15.2	31.8	

Simplified Functional Diagram

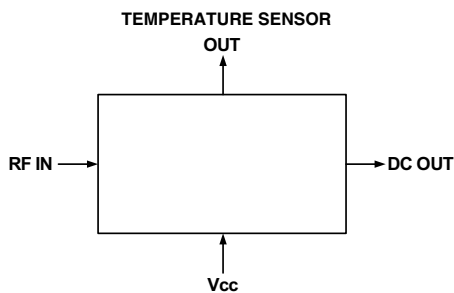

Features

- Low Noise DC Output for ZX47-40LN+, 20mVp-p Typ. @ 10MHz
- High Dynamic Range
- Wide Bandwidth
- Single Supply Voltage: +5V
- Stability Over Temperature
- Built-in Temperature Sensor
- Protected by US patent 6,790,049

Applications

- RF/IF Power Measurements
- Low Cost Power Monitoring System
- RF Leakage Monitors
- Fast feedback Levelling Circuits
- RF Power Control
- Receiver RF/IF Gain Control
- RSSI measurements



CASE STYLE: HN1173

Connectors	Model	Price	Qty.
SMA	ZX47-40-S+	\$89.95 ea.	(1-9)
SMA	ZX47-40LN-S+	\$89.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)	DYNAMIC RANGE AT ±1dB ERROR (dBm)	OUTPUT VOLT. RANGE (V)	SLOPE (mV/dB) (Note 1)	VSWR (:1)	PULSE RESPONSE TIME (nSec) Typ.		TEMP. SENSOR OUTPUT SLOPE (mV/°C) (Note 2)	DC OPERATING POWER					
					ZX47-40+ Rise	ZX47-40LN+ Fall		Vcc (Volts)		Note 3 Current (mA)			
Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Min.	Typ.	Max.	Typ.		
10	1000	-40 to +20		1.03									
1000	5000	-40 to +15		1.10									
5000	6000	-35 to +20	0.50 - 2.10	1.20	400	10	800	400	2.00	4.5	5.0	5.5	100
6000	8000	-30 to +20		1.40									

Notes:

1. The negative slope indicates that Output Voltage decreases as Input Power increases. See "Output Voltage vs Input Power" graph below.
2. Temperature sensor output provides a DC Output Voltage which increases linearly with temperature rise. Recommended minimum load for this port is 2 kΩ.
3. Recommended minimum load at DC out port is 100 Ω. See maximum ratings for no damage.


Output Voltage Vs Input Power @ +25°C

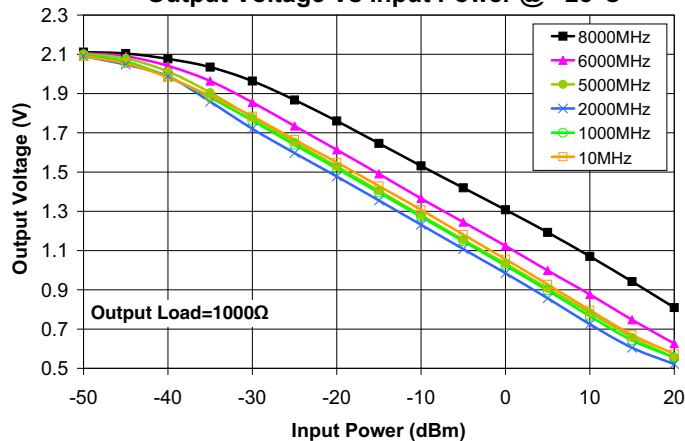


Performance Curves

ZX47-40+ ZX47-40LN+


Power Input Deviation from Ideal Vs Output Voltage @ Freq 10MHz

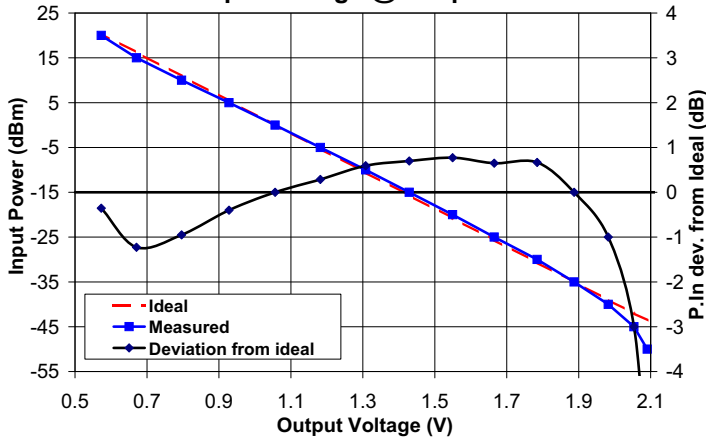


Power Input Deviation from Ideal Vs Output Voltage @ Freq 2000MHz

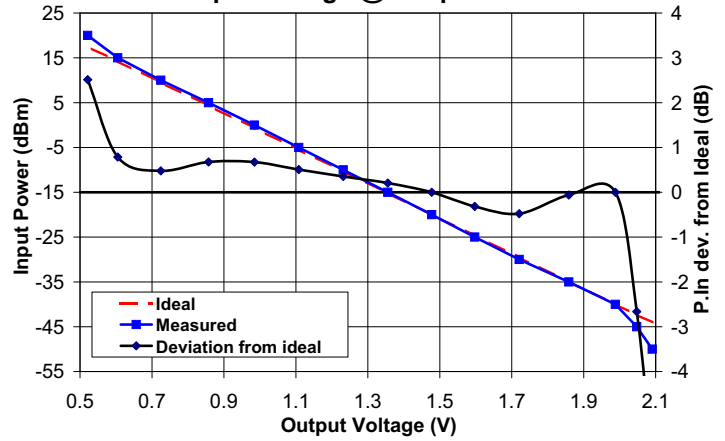


Power Input Deviation from Ideal Vs Output Voltage @ Freq 6000MHz

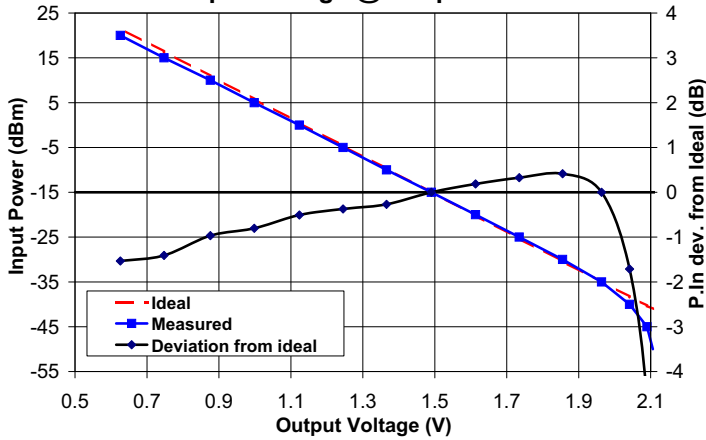


Power Input Deviation from Ideal Vs Output Voltage @ Freq 8000MHz

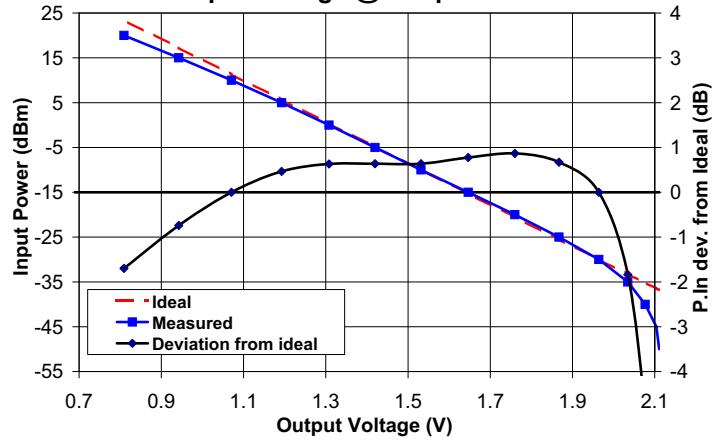

Output Voltage Change Vs Freq Over Temperature Range

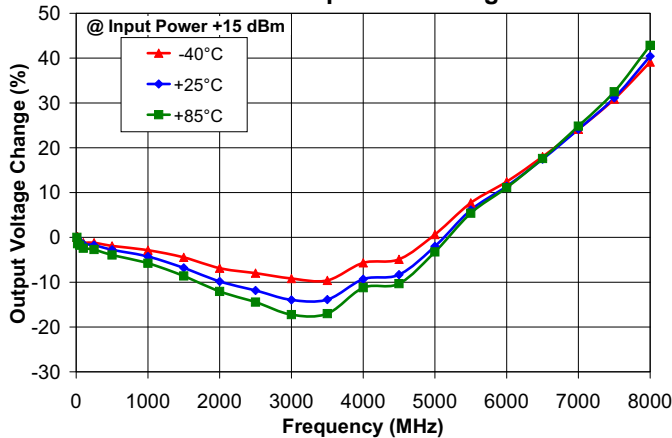

Output Voltage Change Vs Freq Over Temperature Range

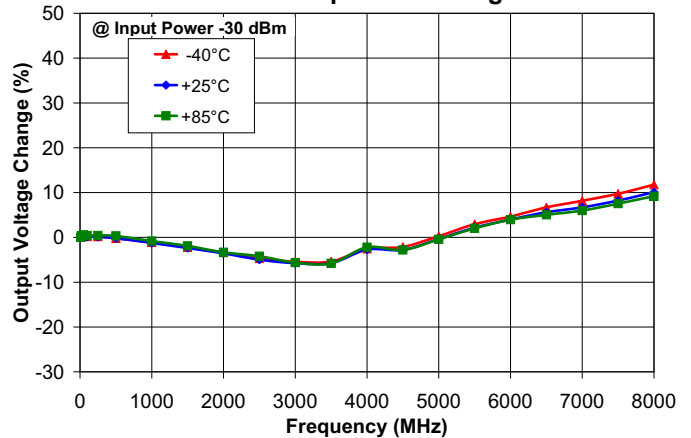

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS


Performance Curves

ZX47-40+ ZX47-40LN+


Slope Vs Input Power Over Temperature Range @ Freq 10MHz

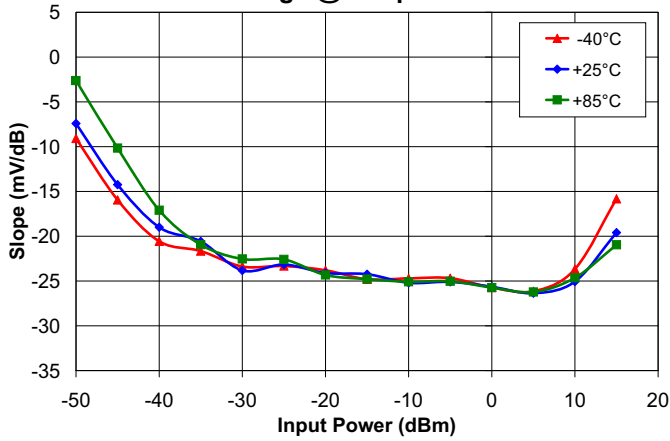


Slope Vs Freq Over Temperature Range @ Input Power -40dBm

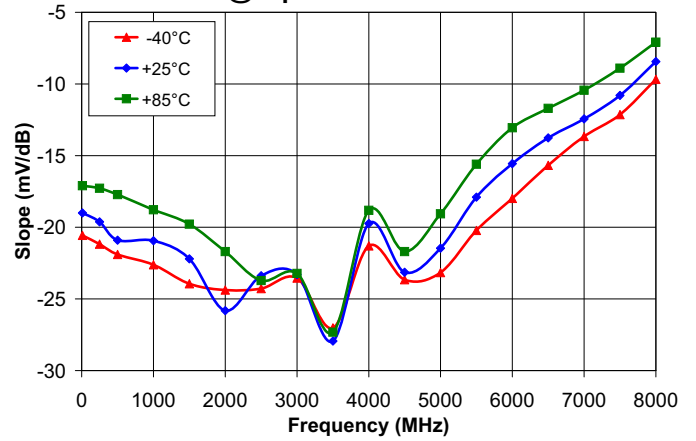


Slope Vs Input Power Over Temperature Range @ Freq 5000MHz

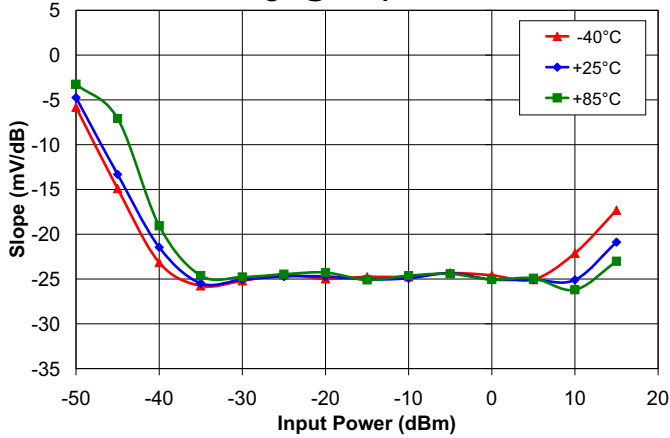


Slope Vs Freq Over Temperature Range @ Input Power -25dBm

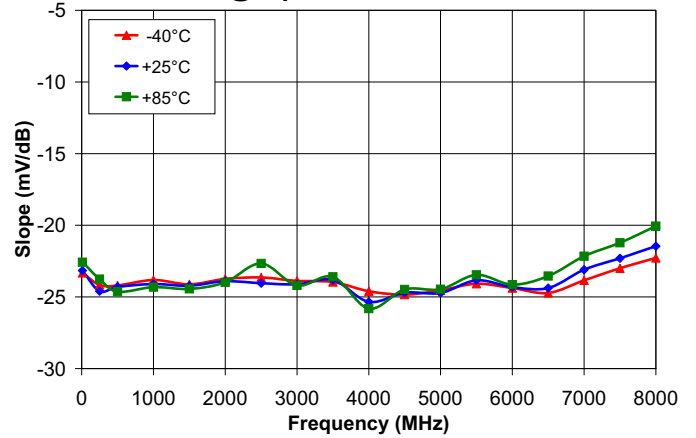

Slope Vs Input Power Over Temperature Range @ Freq 8000MHz

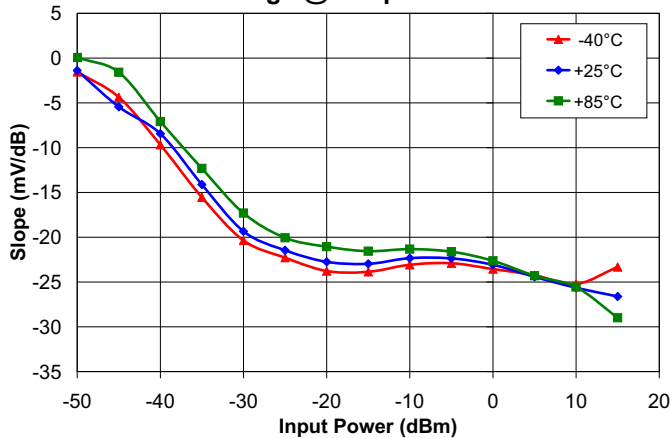

Slope Vs Freq Over Temperature Range @ Input Power 0dBm

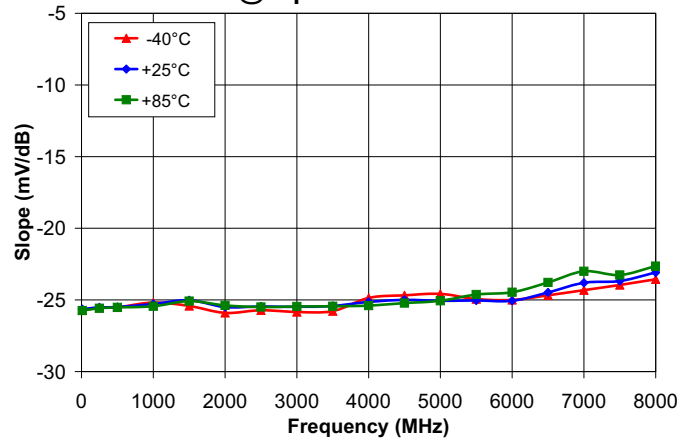

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

