


# Surface Mount Power Splitter/Combiner

## ADQ-180+ ADQ-180

2 Way-90° 50Ω 120 to 180 MHz



### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

SUM PORT	1
PORT 1 (+90°)	8
PORT 2 (0°)	4
GROUND	2,3,6,7
50 OHM TERM EXTERNAL	5

### Outline Drawing




#### PCB Land Pattern



### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.345	.400	.385	.435	.310	.215	.100	.015	.025	.035	.075	.120	.060	.420	grams
8.76	10.16	9.78	11.05	7.87	5.46	2.54	0.38	0.64	0.89	1.91	3.05	1.52	10.67	0.45

### Demo Board MCL P/N: TB-83 Suggested PCB Layout (PL-063)

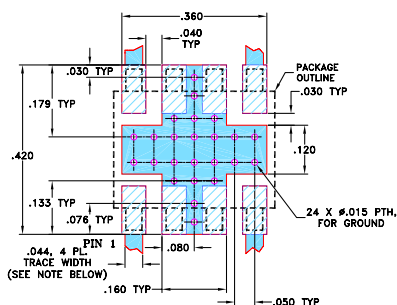

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- excellent amplitude unbalance, 0.6 dB typ. and phase unbalance, 0.7 deg. typ.
- very low insertion loss, 0.2 dB typ.
- small surface mount package
- protected under U.S. Patent 6,133,525

### Applications

- VHF TV

CASE STYLE: CJ725  
PRICE: \$6.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L$ - $f_U$	Typ. Min.	Typ. Max.	Max.	Max.
120-180	35 20	0.2 0.7	6	1.5

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
120.00	3.30	3.07	0.23	53.66	90.26	1.04	1.03	1.05
123.00	3.24	3.13	0.11	50.12	90.31	1.04	1.03	1.05
126.00	3.18	3.19	0.01	47.30	90.31	1.04	1.03	1.05
130.50	3.11	3.27	0.16	44.27	90.39	1.03	1.03	1.05
135.00	3.05	3.34	0.30	41.81	90.45	1.03	1.03	1.06
139.50	2.99	3.40	0.41	39.71	90.55	1.03	1.03	1.06
144.00	2.95	3.46	0.51	37.87	90.63	1.03	1.03	1.06
148.50	2.92	3.51	0.59	36.28	90.69	1.03	1.03	1.06
153.00	2.90	3.54	0.65	34.78	90.79	1.03	1.03	1.06
157.50	2.88	3.57	0.69	33.39	90.90	1.03	1.03	1.06
162.00	2.88	3.59	0.71	32.08	91.01	1.04	1.04	1.07
166.50	2.89	3.60	0.71	30.85	91.14	1.04	1.04	1.07
171.00	2.91	3.60	0.69	29.66	91.28	1.05	1.05	1.08
175.50	2.94	3.58	0.64	28.50	91.41	1.05	1.06	1.08
180.00	2.98	3.56	0.57	27.36	91.58	1.06	1.06	1.09

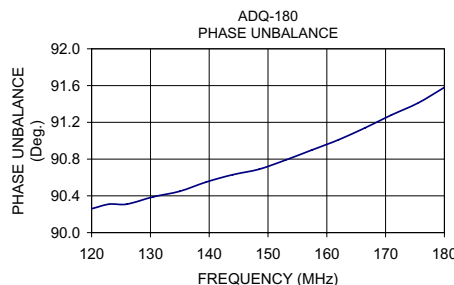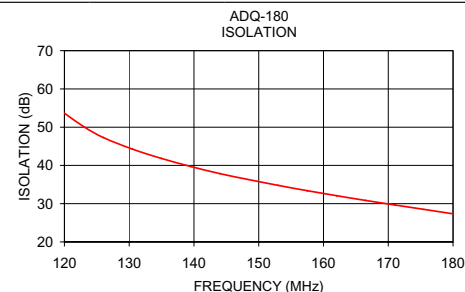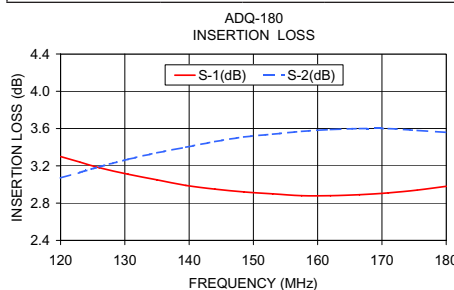

### electrical schematic



For detailed performance specs & shopping online see web site

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. C  
M102713  
ADQ-180  
ED-9402A/1  
DY/TD/CP  
090914