

Coaxial

# Low Pass Filter

## BBLP-39+

50Ω Flat Time Delay DC to 23 MHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

### Features

- flat group delay for low pulse distortion
- rugged shielded case
- other BBLP models available with wide selection of cut-off frequencies

### Applications

- linear modulation techniques
- voice transmission applications
- digital communications



CASE STYLE: FF55			
Connectors	Model	Price	Qty.
BNC	BBLP-39+	\$36.95 ea.	(1-9)


**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

### Low Pass Filter Electrical Specifications

PASSBAND (MHz) (loss < 1.2 dB) Min.	f <sub>co</sub> , (MHz) Nom. (loss 3 dB)	STOPBAND (MHz)		VSWR (:1)		GROUP DELAY VARIATION (nsec)		
		(loss > 10 dB)	(loss > 20 dB)	DC-0.2f <sub>co</sub>	DC-0.6f <sub>co</sub>	DC-f <sub>co</sub>	DC-2f <sub>co</sub>	DC-2.67f <sub>co</sub>
DC-23	39	78-117	117	1.3:1	2.3:1	0.7	4.0	5.0


### Outline Drawing

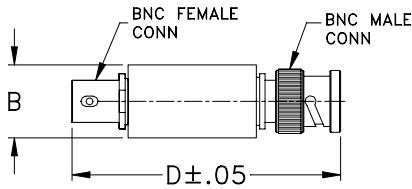


### Outline Dimensions (inch/mm)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0


TYPICAL GROUP DELAY



TYPICAL FREQUENCY RESPONSE






electrical schematic

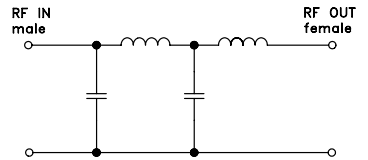

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	$\sigma$			
1.0	0.02	0.00	35.5	1.0	8.012
9.0	0.14	0.00	17.0	5.0	8.243
12.0	0.23	0.01	14.3	9.0	7.823
16.0	0.38	0.01	11.6	12.0	8.199
20.0	0.60	0.02	9.4	16.0	8.305
23.0	0.82	0.02	8.1	20.0	8.466
24.0	0.91	0.02	7.7	23.0	8.623
34.0	2.11	0.03	4.5	24.0	8.392
39.0	2.95	0.04	3.4	29.0	8.899
40.0	3.14	0.04	3.2	34.0	8.378
51.0	5.48	0.06	1.9	39.0	8.392
62.0	8.15	0.07	1.2	40.0	8.247
69.0	9.69	0.08	1.0	46.0	7.722
73.0	11.00	0.09	0.8	51.0	7.336
78.0	12.33	0.10	0.7	57.0	6.804
79.0	12.60	0.10	0.7	62.0	6.487
90.0	15.56	0.13	0.5	68.0	6.306
101.0	18.53	0.15	0.4	73.0	5.277
107.0	20.14	0.16	0.3	78.0	5.124
112.0	21.46	0.16	0.3	79.0	5.489
117.0	22.76	0.17	0.3	85.0	5.101
118.0	23.02	0.17	0.3	90.0	4.784
132.0	26.55	0.17	0.2	96.0	4.054
146.0	29.88	0.17	0.2	101.0	3.996
159.0	32.80	0.17	0.1	107.0	3.275
173.0	35.76	0.16	0.1	112.0	3.856
180.0	37.17	0.15	0.1	117.0	2.547
187.0	38.55	0.16	0.1	118.0	2.738
194.0	39.89	0.15	0.1	125.0	2.216
200.0	41.00	0.16	0.1	132.0	2.576

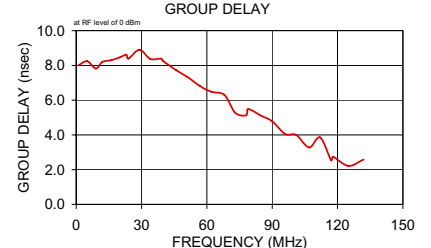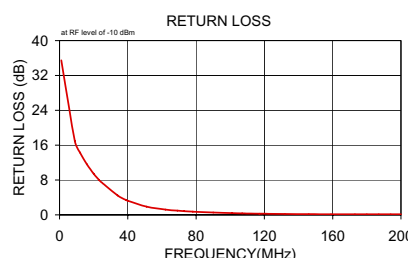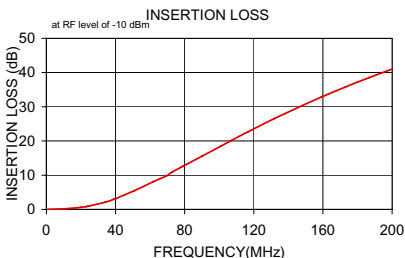

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. B  
M113397  
BBLP-39+  
080103