

# Bandpass Filter

## BPF-A69+

50Ω 55 to 83 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5*W at 25°C

\*Passband rating, derate linearly to 0.25W at 100°C ambient.

### Pin Connections

RF IN	1
RF OUT	8
GROUND	2,3,4,5,6,7,9,10,11,12,13,14

### Outline Drawing

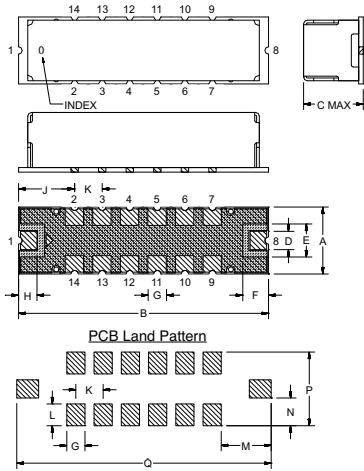


Suggested Layout  
Tolerance to be within ±.002

METALLIZATION  
 SOLDER RESIST

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.58	2.54	2.54
J	K	L	M	N	P	Q	wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.87	10.29	35.65	4.0

Demo Board MCL P/N: TB-363+  
Suggested PCB Layout(PL-227)

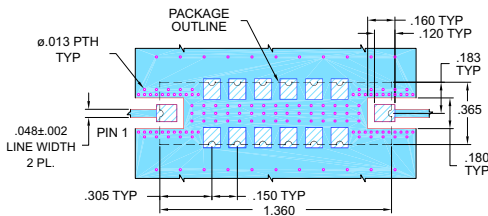

#### NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- Good VSWR, 1.3:1 Typ @ Pass Band
- High Stop Band Rejection

### Application

- Harmonic Rejection
- Transmitters/Receivers



CASE STYLE: HQ1157  
PRICE: \$29.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Bandpass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB) F1 - F2	STOPBANDS (MHz)		VSWR (:1)			
		Loss > 20dB F3 F4	Loss > 40dB F5 F6	Passband Max.	Stopband Typ.		
69	55 - 83	40	97	32	103 - 500	1.6	20

### Typical Frequency Response

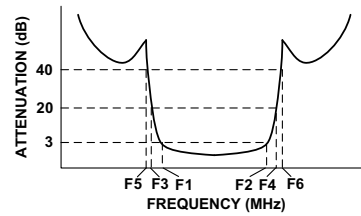

### Functional Schematic

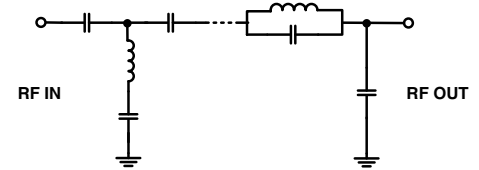

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	87.50	1737.18
25	78.02	157.93
32	50.82	69.49
40	28.30	31.03
43	21.02	21.46
48	9.52	7.80
50	5.80	4.30
52	3.40	2.47
55	1.97	1.55
69	1.16	1.15
83	2.03	1.34
85	3.20	2.06
87	5.74	3.37
89	9.56	5.07
94	21.75	8.43
97	29.95	10.31
103	49.46	13.70
120	78.14	18.30
500	53.55	44.55

