

# Surface Mount Bandpass Filter

## BPF-C650+

50Ω 560 to 780 MHz


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

### Pin Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6, 13
GROUND	1, 3, 4, 5, 7, 8, 10, 11, 12, 14


### Outline Drawing

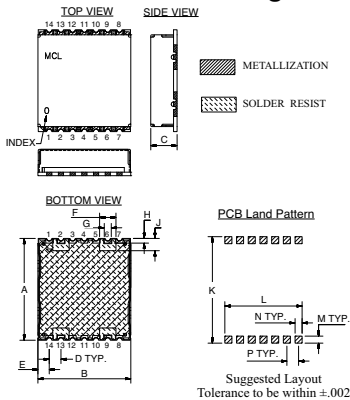

### Outline Dimensions (inch/mm)




A	B	C	D	E	F	G		
.870	.800	.250	.100	.097	.140	.060		
22.10	20.32	6.34	2.54	2.46	3.56	1.52		
H	J	K	L	M	N	P	wt.	
.040	.105	.910	.660	.060	.060	.100	grams	
1.02	2.67	23.11	5.72	1.52	1.52	2.54	4.0	

### Demo Board MCL P/N: TB-500+ Suggested PCB Layout (PL-294)

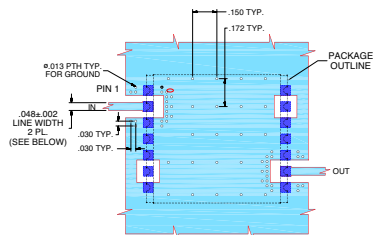

#### NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B. DIELECTRIC THICKNESS: .030±.002; COPPER: 1/2 OZ EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

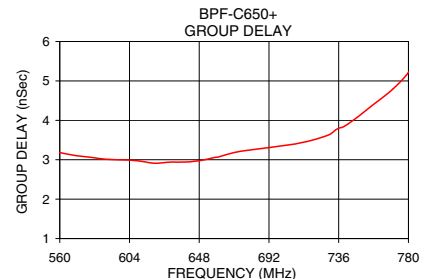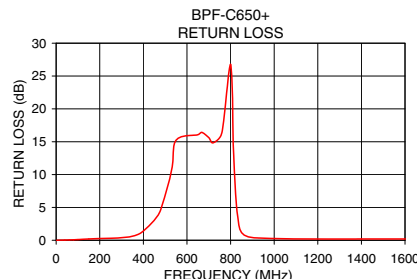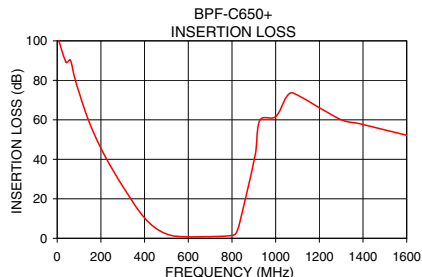

### Features

- Flat Group Delay
- High Rejection
- Shielded case
- Aqueous washable

### Applications

- Receivers / Transmitters
- Wireless communication systems



CASE STYLE: HU1186  
PRICE: \$34.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Bandpass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F <sub>c</sub>	F <sub>1</sub> - F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	F <sub>5</sub>	F <sub>6</sub>	Typ.	Max.	Typ.
650	560 - 780	280	890	185	920 - 1600	1.4	1.8	18

### Typical Frequency Response

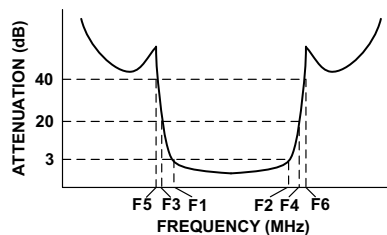

### Functional Schematic

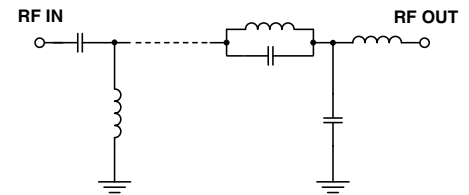

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	$\bar{x}$	$\sigma$			
2.0	101.98	9.04	0.00	560.0	3.18
100.0	74.01	0.79	0.11	570.0	3.11
185.0	48.87	0.16	0.24	580.0	3.06
280.0	29.90	0.14	0.35	600.0	3.00
340.0	19.49	0.15	0.54	610.0	2.96
400.0	10.25	0.17	1.40	630.0	2.94
450.0	5.12	0.09	3.06	640.0	2.94
500.0	2.23	0.06	6.40	650.0	2.99
520.0	1.53	0.05	8.96	660.0	3.07
560.0	0.82	0.01	17.93	680.0	3.25
650.0	0.75	0.02	16.06	700.0	3.35
780.0	1.16	0.04	19.23	710.0	3.41
820.0	2.80	0.14	8.88	720.0	3.51
830.0	5.62	0.24	4.20	730.0	3.64
847.0	13.23	0.39	1.37	740.0	3.86
890.0	33.65	0.40	0.47	750.0	4.15
920.0	51.96	0.95	0.36	770.0	4.79
1600.0	53.63	1.11	0.19	780.0	5.21

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

ALL NEW  
**minicircuits.com**

REV. OR  
M119635  
EDR-8665/1UF1  
BPF-C650+  
URJ/RAV  
081202  
Page 1 of 1