


# Plug-In Attenuator/Switch

50Ω Bi-Phase 10 to 1000 MHz

**GAS-2**



CASE STYLE: A05  
PRICE: \$20.20 ea. QTY. (1-9)

## Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

## Pin Connections

INPUT	1
OUTPUT	8
CONTROL	3,4^
GROUND	2,5,6,7
CASE GROUND	2,5,6,7

^ pins must be connected together externally

## Outline Drawing

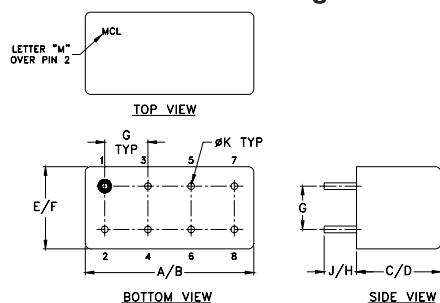

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.770	.800	.240	.250	.370	.400	
19.56	20.32	6.10	6.35	9.40	10.16	
G	H	J	K			wt
.200	.20	.14	.031			grams
5.08	5.08	3.56	0.79			3.7

## Features

- wideband, 10 to 1000 MHz
- rugged shielded case

## Applications


- bi-phase modulator
- electronic attenuator

## Attenuator/Switch Electrical Specifications


FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA						BI-PHASE X (±20 mA) Typ.								
			L		M		U		Δ AMP (dB)		Phase (deg.) deviation from 180°						
IN f <sub>L</sub> -f <sub>U</sub>	CON	Mid-Band m	Total Range		1 dB compr.	no damage	Typ.	Min.	Typ.	Min.	Typ.	Min.	m	Total Range	m	Total Range	
10-1000	DC-0.05	4.3	6	5.2	8.5	20	25	55	40	35	25	28	20	0.10	0.3	1.5	3.0

L = low range [f<sub>L</sub> to 10 f<sub>L</sub>] M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2] U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>] m = [2 f<sub>L</sub> to f<sub>U</sub>/2]  
Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

## suggested control port biasing configuration






## electrical schematic



## Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control, 20mA		Isolation (dB)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl			Input VSWR			
		ΔAMP (dB)	ΔPhase (deg.)	(in-out)	(in-con)			10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz	
	̄	σ	̄	̄	̄	̄					deg.	deg.	deg.				
10.0	3.50	0.025	0.01	180.00	70	47	12.3	0.0000	71.8	43.8	38.2	-37.1	96.0	63.6	3.6	2.9	7.5
19.9	3.52	0.015	0.01	180.00	68	40	12.7	0.0003	63.7	44.2	38.1	-34.3	93.2	62.4	3.6	2.9	7.5
39.7	3.61	0.008	0.01	179.90	67	35	12.6	0.0004	55.7	43.8	38.1	-12.5	86.0	57.8	3.6	2.9	7.5
59.5	3.63	0.006	0.01	179.90	65	31	12.5	0.0016	51.2	43.3	38.1	-8.5	80.1	52.8	3.6	2.8	7.4
79.3	3.66	0.006	0.01	179.90	64	29	12.5	0.0057	45.4	41.1	36.8	-4.6	55.5	35.7	3.6	2.8	7.3
86.7	3.68	0.006	0.01	179.90	63	28	12.5	0.0105	41.5	38.6	35.6	-1.2	42.6	23.4	3.5	2.8	7.1
99.1	3.73	0.006	0.01	179.90	62	27	12.4	0.0161	38.3	36.0	33.7	1.5	34.4	12.9	3.5	2.8	6.9
163.5	3.95	0.006	0.01	179.80	58	23	12.3	0.0286	33.9	31.8	30.1	3.6	24.5	0.6	3.4	2.7	6.6
237.7	4.03	0.007	0.01	179.70	55	20	12.1	0.0437	30.3	28.4	27.1	4.3	20.7	-5.6	3.3	2.6	6.2
314.4	4.05	0.008	0.01	179.37	52	18	12.0	0.0734	26.2	24.4	23.2	5.1	16.3	-9.9	3.1	2.4	5.6
391.2	4.23	0.012	0.02	179.60	50	17	12.1	0.1029	23.6	21.8	20.8	5.0	14.4	-11.4	2.9	2.3	5.2
467.9	4.36	0.017	0.04	179.60	48	17	12.3	0.1510	20.7	19.1	18.2	5.0	12.8	-11.9	2.7	2.1	4.7
500.1	4.38	0.021	0.04	179.60	47	17	12.4	0.2540	17.1	15.6	15.1	4.6	10.4	-11.1	2.4	1.8	4.0
542.1	4.48	0.027	0.06	179.50	46	17	12.5	0.3743	14.6	13.3	13.1	4.3	9.0	-9.9	2.1	1.6	3.6
618.9	4.63	0.040	0.10	179.50	44	18	12.6	0.6438	11.5	10.6	10.8	3.5	6.9	-7.5	1.7	1.3	3.1
695.6	4.90	0.053	0.13	179.60	43	20	12.1	0.9350	9.7	9.1	9.6	3.0	5.4	-6.0	1.5	1.2	2.9
772.3	5.02	0.064	0.16	179.38	41	23	10.8	1.7496	7.2	7.2	8.2	2.0	3.6	-3.6	1.2	1.1	2.7
846.6	5.51	0.073	0.16	179.70	41	21	9.1	2.6537	5.5	5.9	7.3	1.3	1.9	-1.8	1.2	1.3	2.7
923.3	6.21	0.087	0.21	179.80	40	17	7.5	7.3045	4.3	4.9	6.7	0.5	0.6	-0.7	1.4	1.5	2.6
1000.0	7.06	0.093	0.36	180.40	40	14	6.3	15.1437	3.6	4.5	6.4	0.1	0.1	-0.1	1.5	1.6	2.6

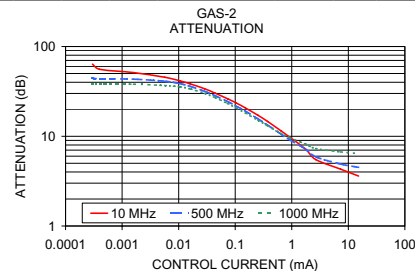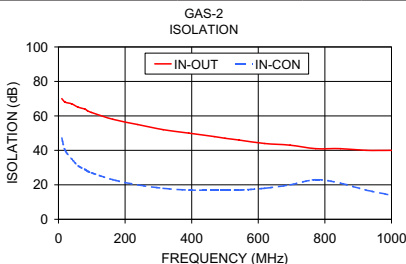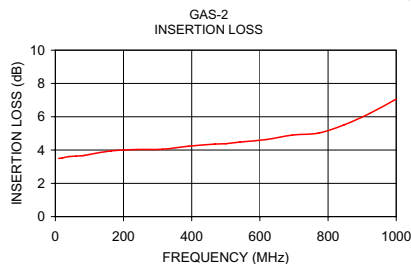

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. A  
M126372  
GAS-2  
WP/TD/CP  
100215