

50Ω 250 to 450 MHz

The Big Deal

- Termination insensitive
- Low Insertion Loss: 1.3 dB
- Large attenuation range: 35 dB



CASE STYLE: CZ682

Product Overview

The Mini-Circuits HVA series, surface mount, constant impedance voltage variable attenuators provide excellent attenuation and linearity performance while maintaining constant RF impedance across the attenuation range. Built using Mini-Circuits proven shielded module construction technology, these models integrate dual pin diodes along with internal 90 degree hybrids. This termination insensitive approach allows more flexibility so designers can locate the attenuators anywhere in their lineup, including cascading VVAs for true attenuation addition without VSWR interaction degrading the usable attenuation range.

Key Features

Feature	Advantages
Constant Impedance (Termination insensitive)	The HVA series VVA incorporates 90° hybrids to buffer internal circuits from source and load mismatch. This unique feature enables the HVA series to maintain performance independent of source and load impedance, and allows units to be cascaded with true additive attenuation.
Excellent flatness	Typical attenuation flatness less than 1 dB typ. across the full band from 0 to 30 dB attenuation is great for feed forward applications.
Monotonic Response	Monotonic response (0 to 2.5V) makes a great selection for ALC circuits
Return Loss	22 dB typ return loss across frequency and control voltage ranges provides an excellent match under all operating conditions allowing straightforward cascading.
High IP3	High +50 dBm IP3 typ. at min attenuation and +40 dBm typ. up to 2.5V allows flexibility to locate VVA in lineup where attenuation is required the most without degrading system linearity.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Voltage Variable Attenuator

HVA-451+

50Ω 250 to 450 MHz



CASE STYLE: CZ682
PRICE: \$7.95 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Control Current	10 mA
Absolute Max. RF Input Level	+15 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN	1
V CONTROL 1	3
V CONTROL 2	5
RF OUT	7
GROUND	2,4,6,8

Features

- low insertion loss, 1.3 dB typ.
- high attenuation, 32 dB typ.
- excellent return loss, 22 dB typ.

Applications


- variable gain amplifier
- feed forward amps
- ALC circuits

Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		250	—	450	MHz
Insertion Loss	at 0V Control Voltage	—	1.2	1.9	dB
Attenuation		27	32	—	dB
IP3 ¹	at 0V Control Voltage	43	50	—	dBm
Input Return Loss		—	22	—	dB
Output Return Loss		—	21	—	dB
Control Voltage ²		0-6			V

1. Input IP3 tested with two tones separated by 0.1 MHz at 0 dBm each and 0V control voltage.
2. Using recommended control port biasing.


Outline Drawing

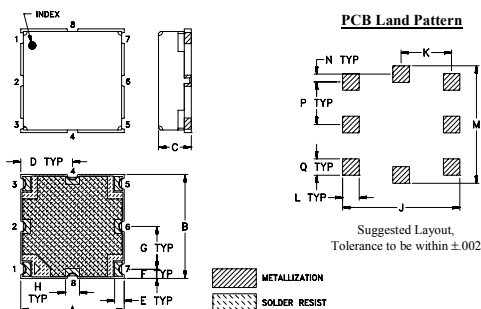

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.375	.375	.131	.188	.035	.033	.154	.050
9.52	9.52	3.33	4.77	0.89	0.84	3.91	1.27
J	K	L	M	N	P	Q	wt
.425	.183	.060	.425	.028	.154	.060	grams
10.80	4.65	1.52	10.80	0.71	3.91	1.52	0.60


Demo Board MCL P/N: TB-511+ Suggested PCB Layout (PL-323)




CAPACITORS C1, C2: 1000 pF, 0805 SIZE;
C3, C4: 88 pF, 0805 SIZE

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Equivalent Schematic of DUT

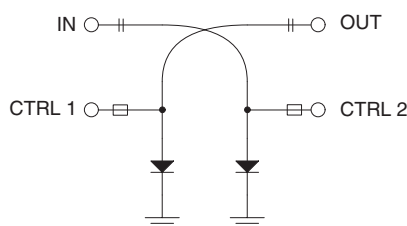

HVA-451+
TYPICAL ATTENUATION AT 340 MHz

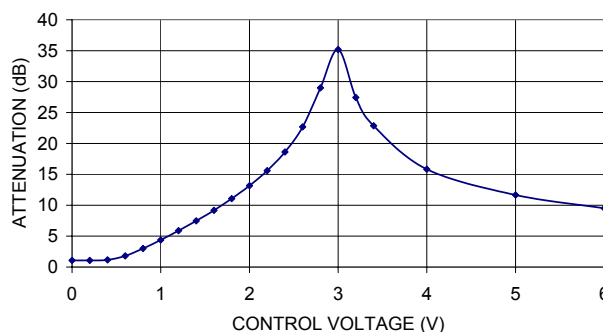

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M126050
HVA-451+
ED-13662/2
DJ/CP/AM
100216
Page 2

