

Surface Mount Directional Coupler

JDC-20-2+ JDC-20-2

50Ω 400 to 900 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4


Outline Drawing

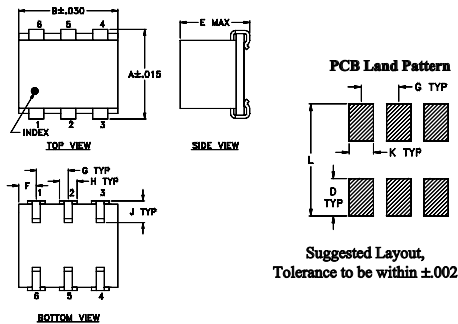

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G		
.280	.310	--	.100	.225	.055	.100		
7.11	7.87	--	2.54	5.72	1.40	2.54		
H	J	K	L				wt	
.047	.065	.065	.300				grams	
1.19	1.65	1.65	7.62				0.45	

Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

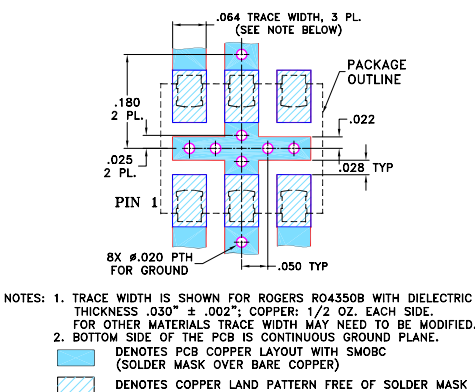

Features

- low mainline loss, 0.2 dB typ.
- good VSWR, 1.15:1
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements
- cellular

Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		Typ.	L Max.
f _L -f _U									
400-900	20.5±1.0	±1.0	0.2	0.6	19	13	1.15	2.0	2.0

1. Mainline loss includes theoretical power loss at coupled port.

CASE STYLE: BH292
PRICE: \$ 13.60 ea. QTY (25-49)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
399.50	0.19	20.43	19.02	25.70	27.30	17.20
499.00	0.20	20.30	19.98	28.30	32.30	18.50
560.00	0.18	20.27	20.02	27.30	28.30	19.10
596.00	0.21	20.23	20.02	26.40	26.40	19.10
632.00	0.23	20.18	19.69	25.70	25.70	19.40
668.00	0.23	20.14	19.79	24.90	24.90	19.40
740.00	0.24	20.02	18.94	23.70	23.70	19.40
776.00	0.24	20.00	18.59	23.10	22.60	19.40
800.00	0.26	19.96	18.23	22.60	22.10	19.40
900.00	0.28	19.77	16.93	22.10	20.80	18.50


JDC-20-2
MAINLINE LOSS

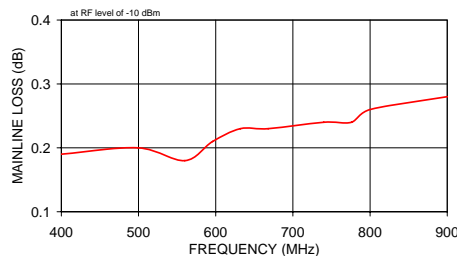


JDC-20-2
COUPLING & DIRECTIVITY

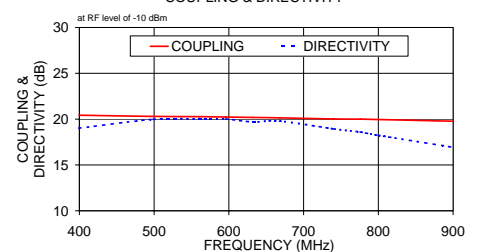

JDC-20-2
RETURN LOSS

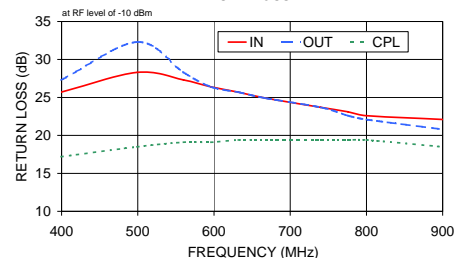

Electrical Schematic

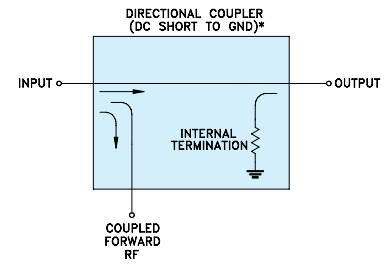

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

For detailed performance specs & shopping online see web site

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine
Provides ACTUAL Data Instantly at minicircuits.com
I/F/R/F MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M119986
JDC-20-2
WZ/TD/CP/AM
090903