

# Phase Shifter

## JSPHS-51+

50Ω 180° Voltage Variable 36 to 54 MHz



CASE STYLE: BK276  
PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm max.
Control Voltage	18V

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

IN	1
OUT	7
BIAS	4,6^
GROUND	2,3,,5,8,9,10,11,12,13,14

^ pins must be connected together externally

### Features

- low insertion loss, 1.2 dB typ.
- good VSWR, 1.3 typ.
- solder-plated J-leads for excellent solderability and strain relief
- aqueous washable

### Applications


- IF signal processing

### Phase Shifter Electrical Specifications

FREQUENCY (MHz)	PHASE RANGE (Degrees)	INSERTION LOSS (dB)		CONTROL VOLTAGE (V)	CONTROL BANDWIDTH (kHz)	VSWR (:1)	
		Typ.	Max.			Typ.	Max.
36-54	180	1.2	2.5	0-12	DC-50	1.2	1.8

Maximum operating power, 0 dBm  
DC input resistance at Control port: 9.3k ohms typ.


### Outline Drawing

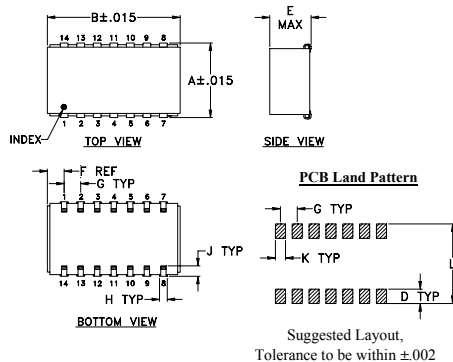

### Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.450	.803	--	.100	.250	.102	.100
11.43	20.40	--	2.54	6.35	2.59	2.54
H	J	K	L	wt		
.047	.065	.065	.470	grams		
1.19	1.65	1.65	11.94	3.0		




### Demo Board MCL P/N: TB-122+ Suggested PCB Layout (PL-030)

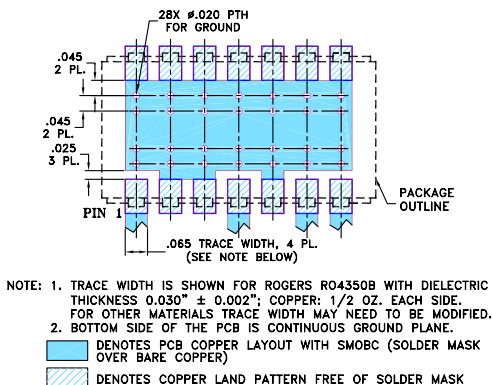


### Typical Performance Data

Control Voltage (V)	Phase Shift* (Degrees)			VSWR (:1)			Insertion Loss (dB)		
	36 MHz	45 MHz	54 MHz	36 MHz	45 MHz	54 MHz	36 MHz	46 MHz	54 MHz
0.0	0.00	0.00	0.00	1.27	1.02	1.08	1.26	0.82	0.67
1.0	18.04	7.16	3.25	1.29	1.02	1.08	1.40	0.89	0.70
3.0	62.86	26.70	11.66	1.39	1.04	1.10	1.58	1.09	0.79
5.0	113.34	59.95	25.08	1.54	1.03	1.13	1.46	1.39	0.94
7.0	155.95	118.73	51.60	1.63	1.06	1.17	1.13	1.56	1.25
9.0	185.56	188.68	116.21	1.63	1.22	1.15	0.87	1.12	1.75
10.0	196.22	214.66	168.00	1.62	1.25	1.08	0.79	0.87	1.62
12.0	211.20	246.54	244.09	1.58	1.25	1.09	0.71	0.59	0.82
14.0	219.23	260.98	272.59	1.56	1.23	1.08	0.63	0.50	0.55
15.0	221.44	264.40	278.57	1.56	1.22	1.08	0.61	0.48	0.51

\* Normalized at control voltage = 0V

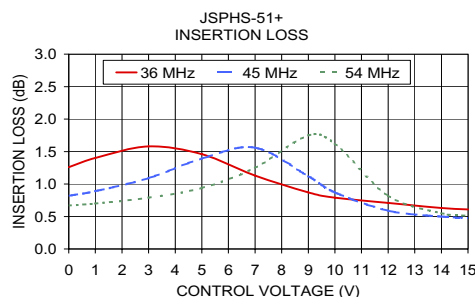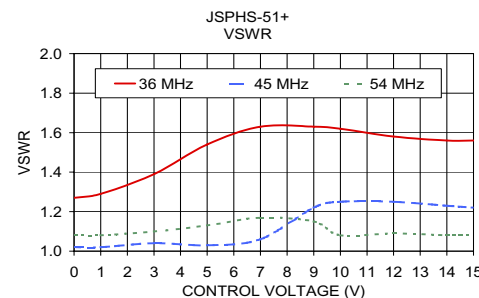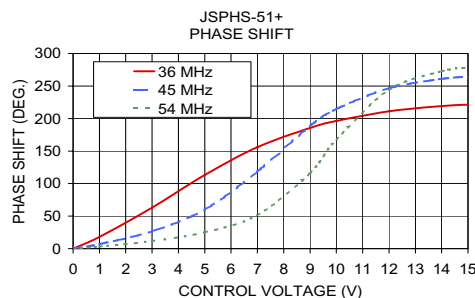

### electrical schematic



For detailed performance specs & shopping online see web site

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M111539  
JSPHS-51+  
ED-8482/1  
WZ/CP/AM  
100209