

Surface Mount Power Splitter/Combiner

2 Way-90° 50Ω 105 to 160 MHz

JYPQ-160+
JYPQ-160




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

SUM PORT	8
PORT 1 (+90°)	1
PORT 2 (0°)	4
GROUND	2,3,6,7
50 OHM TERM EXTERNAL	5

Outline Drawing

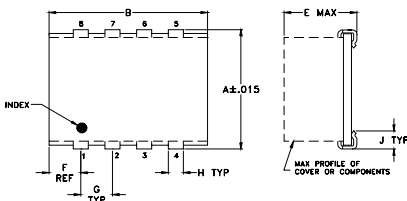

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	wt grams
.395	.500	--	.100	.230	.100	.100	.047	.065	.065	.425	0.80
10.03	12.70	--	2.54	5.84	2.54	2.54	1.19	1.65	1.65	10.80	

Demo Board MCL P/N: TB-216 Suggested PCB Layout (PL-100)

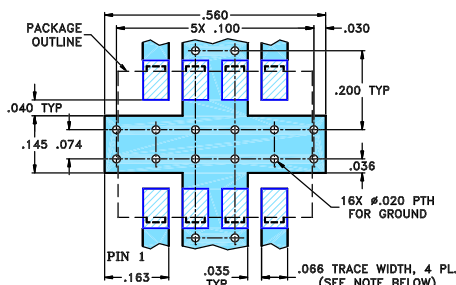

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT
4. DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- low insertion loss, 0.25 dB typ.
- good isolation, 24 dB typ.

Applications




- VHF
- signal processing
- modulators
- image rejection mixers

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ.	Min.	Typ.	Max.	Max.	Max.
105-160	24	17	0.25	0.6	3	1.5

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
105.00	3.71	2.70	1.01	30.06	89.85	1.088	1.101	1.097
110.00	3.60	2.80	0.79	29.77	89.92	1.090	1.104	1.101
120.00	3.42	2.98	0.45	28.89	90.09	1.098	1.112	1.110
125.00	3.36	3.04	0.32	28.26	90.15	1.104	1.117	1.116
127.00	3.34	3.07	0.28	28.00	90.22	1.106	1.119	1.118
131.00	3.31	3.11	0.20	27.40	90.29	1.111	1.124	1.124
135.00	3.29	3.13	0.16	26.76	90.36	1.117	1.130	1.131
139.00	3.29	3.16	0.12	26.05	90.49	1.124	1.137	1.138
141.00	3.29	3.16	0.12	25.70	90.54	1.128	1.140	1.142
145.00	3.29	3.18	0.12	24.96	90.68	1.136	1.148	1.151
151.00	3.33	3.17	0.16	23.79	90.89	1.151	1.163	1.166
155.00	3.37	3.16	0.21	22.98	91.12	1.162	1.174	1.178
160.00	3.45	3.13	0.32	21.94	91.37	1.179	1.191	1.195

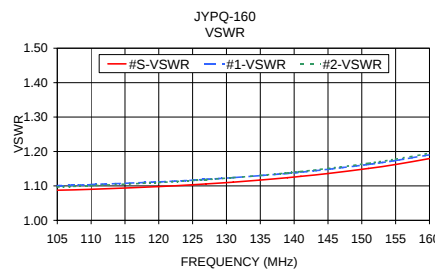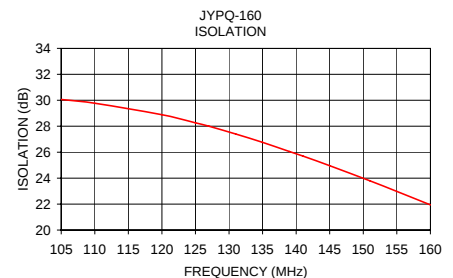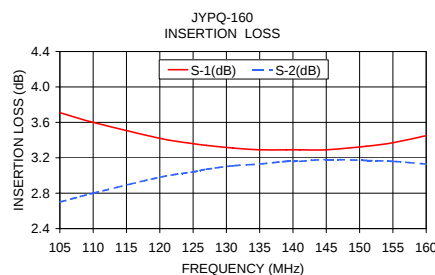

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. B
M102713
JYPQ-160
HY/TD/CP
090824