

Surface Mount Switch

50Ω SPDT, Absorptive DC to 4.6 GHz

KSWA-2-46+




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 150°C
Input Power	see Note 1
Control V	see Note 2
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

RF IN	2
RF OUT 1	5
RF OUT 2	8
CONTROL 1	3
CONTROL 2	1
GROUND	4,6,7

Outline Drawing



PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.180	.180	.070	.400	.350	.050	.015	.005	
4.57	4.57	1.78	10.16	8.89	1.27	0.38	0.13	
J	K	M	N	P	Q	R	S	wt.
.005	.070	.105	.025	.420	.015	.180	.020	grams
0.13	1.78	2.67	0.64	10.67	0.38	4.57	0.51	0.15

Demo Board MCL P/N: TB-204 Suggested PCB Layout (PL-217)

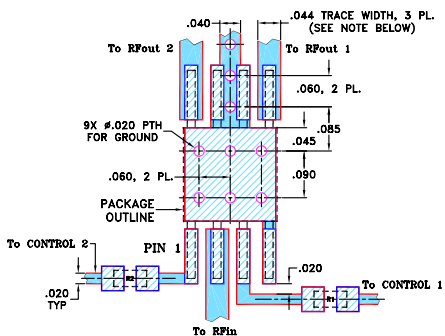

RESISTORS R1, R2: 100 Ohm, 0603 SIZE.
 NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, DC to 4.6 GHz
- low insertion loss, 1.3 dB typ.
- hermetically sealed
- aqueous washable

Applications

- PCN
- cellular
- 2-way radio
- receiver antenna switching

CASE STYLE: XX112
 PRICE: \$58.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQ. (GHz)	INSERTION LOSS (dB)				1dB COMPR. (dBm)			IN-OUT ISOLATION (dB)									
	DC-200 MHz	200-1000 MHz	1000-3000 MHz	3000-4600 MHz	DC-200 MHz	200-1000 MHz	1000-4600 MHz	DC-200 MHz	200-1000 MHz	1000-4600 MHz							
f _L	Typ.	Max.	Typ.	Max.	Typ.	Typ.	Typ.	Typ.	Min.	Typ.	Min.	Typ.	Min.				
DC	0.8	1.1	0.9	1.3	1.5	2.6	1.5	2.6	10	17	27	60	45	50	40	30	25

Additional Specifications


Control Voltage, volts	
Low State	-0.2 to 0
High State (negative) for compression specs	-8
for other specs	-5 to -8
Control Current, mA	2.5 typ. at -8V
VSWR(:1)	1.3 typ.
Rise/Fall time (10%-90%), ns	2 typ.
Switching time, 50% of Control to 90% RF (Turn-on), ns	4 typ.
10% RF (Turn-off), ns	2.5 typ.
Video Leakage, mVp-p 0/-5V Control	30 typ.
MTBF, hrs @ 100°C case	11X10 ⁶

CONTROL LOGIC

Control Ports		RF outputs	
1	2	1	2
-V	0	On	Off
0	-V	Off	On

1. Max. Input RF power, +27 dBm except below 500 MHz +24 dBm
2. Control voltage (-10V) maximum.
3. Video leakage or break through is defined as leakage of switching signal to RF output ports.
4. All RF pins must be DC blocked or held at 0V DC.

Electrical Schematic

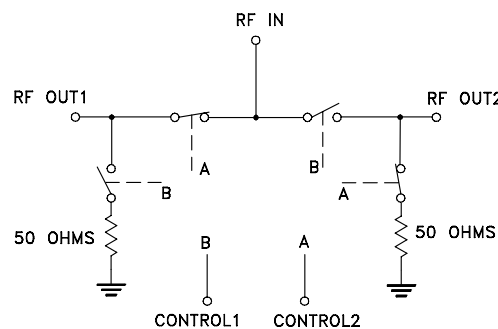

Mini-Circuits
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data

FREQ. (MHz)	ON INSERTION LOSS (dB) Control @ 0V/-5V IN-OUT		OFF ISOLATION (dB) Control @ 0V/-5V IN-OUT		IN	VSWR		
						ON	OUT	OFF
	\bar{x}	σ	\bar{x}	σ		\bar{x}	\bar{x}	\bar{x}
3.00	0.55	0.01	82.53	2.67	1.12	1.12	1.02	
5.00	0.55	0.02	85.42	4.39	1.12	1.12	1.02	
10.00	0.55	0.02	84.71	7.84	1.13	1.13	1.02	
20.00	0.63	0.04	74.57	2.52	1.13	1.12	1.02	
50.00	0.62	0.02	64.87	0.76	1.12	1.12	1.02	
100.00	0.67	0.02	58.56	0.45	1.12	1.12	1.02	
200.00	0.72	0.02	54.29	0.36	1.12	1.11	1.02	
500.00	0.80	0.02	51.52	0.42	1.13	1.12	1.02	
911.55	0.90	0.02	48.87	1.18	1.16	1.11	1.04	
1000.00	0.90	0.03	48.56	1.23	1.17	1.10	1.05	
1581.00	1.01	0.04	44.26	1.63	1.20	1.04	1.11	
2107.00	1.10	0.03	39.70	1.28	1.30	1.09	1.14	
2370.00	1.15	0.05	37.89	1.12	1.31	1.11	1.15	
2489.55	1.26	0.06	37.25	0.97	1.32	1.14	1.17	
2752.55	1.32	0.07	35.59	0.62	1.41	1.22	1.23	
3278.55	1.26	0.04	31.74	1.06	1.44	1.35	1.29	
3804.55	1.63	0.09	28.75	0.72	1.39	1.41	1.38	
4330.55	1.52	0.06	25.75	0.41	1.49	1.78	1.65	
4474.00	1.47	0.09	25.51	0.36	1.57	1.94	1.73	
4600.00	1.98	0.06	25.42	0.32	1.55	1.87	1.67	

