

Surface Mount Low Pass Filter

LPF-B0R6+

50Ω DC to 0.6 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25W Max

Pin Connections

INPUT	1
OUTPUT	2
GROUND	3, 4, 5, 6


Outline Drawing

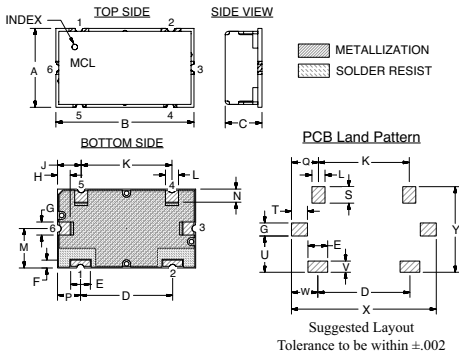

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472	.826	.220	.551	.118	.047	.078	.076	.142	.543	.078	.236
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.92	3.59	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y	wt	
.079	.138	.162	.098	.096	.217	.067	.157	.866	.512	grams	
1.99	3.49	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6	

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

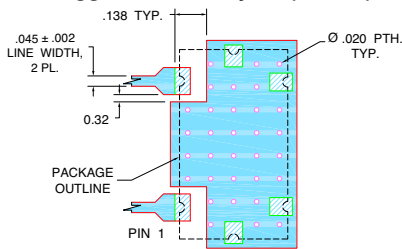


- NOTES:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- High rejection
- Good VSWR, 1.2:1 Typ @ Passband
- Shielded case
- Aqueous washable

Applications

- CDMA
- Cellular Infrastructure
- Wireless communications
- Receivers / Transmitters



CASE STYLE: HZ1198
PRICE: \$9.35 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss > 20dB)	(Loss > 40dB)	Passband Typ.	Stopband Typ.
DC - 0.6 (Loss < 1.5dB)	0.88 (Loss 3dB)	1.08 - 1.23	1.23 - 1000	1.2	20

Typical Frequency Response






Functional Schematic

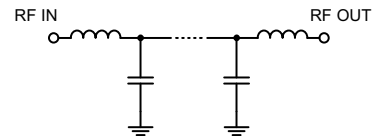

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec.)
	\bar{x}	σ			
0.03	0.23	0.02	28.54	0.03	876.11
0.10	0.26	0.01	20.75	0.05	874.48
0.30	0.31	0.01	18.68	0.10	865.80
0.50	0.38	0.02	25.91	0.20	872.14
0.60	0.49	0.02	23.62	0.25	888.36
0.76	0.85	0.04	20.08	0.28	906.52
0.84	1.63	0.19	15.80	0.30	919.11
0.88	3.73	0.60	5.57	0.34	949.41
0.91	6.91	0.85	2.61	0.36	971.15
0.96	13.72	0.98	0.99	0.40	1002.90
1.04	24.76	0.98	0.50	0.44	1042.92
1.08	30.00	1.00	0.43	0.48	1079.05
1.23	49.62	1.30	0.32	0.52	1121.51
5.00	79.57	2.45	0.17	0.55	1165.29
10.00	92.09	3.23	0.18	0.58	1216.64
100.00	90.93	2.58	0.11	0.60	1254.93
500.00	79.12	5.12	0.33	0.65	1383.05
1000.00	57.11	3.23	0.41	0.70	1571.05

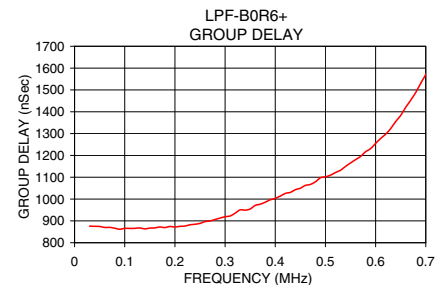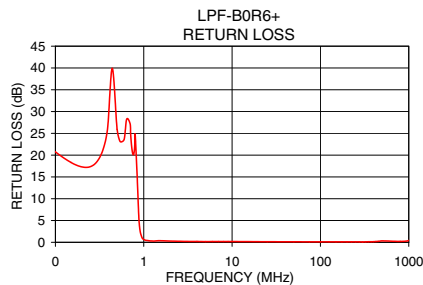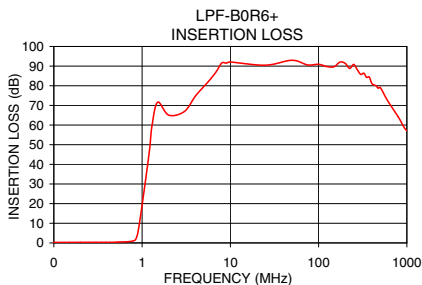

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M119635
EDR-9418U
LPF-B0R6+
URJ/RAV
080919
Page 1 of 1