


Plug-In I&Q Modulator

50Ω 9 to 11 MHz

MIQA-10M



CASE STYLE: A06
PRICE:\$52.20 ea. QTY (1-9)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
LO Power	50mW
I&Q Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO (carrier)	1
RF (signal)	8
I (0°)(ref.)	7
Q (90°)*	4
50Ω TERM EXTERNAL	2
GROUND	3,5,6
CASE GROUND	3,5,6

*Q= I +90° for lower sideband suppression

Features

- hermetically sealed metal case
- excellent 3rd and 5th order harmonic
- good carrier and sideband rejections

Applications

- radar
- communication system
- military, hi-rel application

Modulator Electrical Specifications


FREQUENCY (MHz)				CONVERSION LOSS (dB)			CARRIER REJECTION (-dBc)		SIDE BAND REJECTION (-dBc)		HARMONIC SUPPRESSION (-dBc)			
RF (SIGNAL/ LO (CARRIER))		I&Q		\bar{x}	σ	Max.	Typ.	Min.	Typ.	Min.	3XI/Q		5XI/Q	
fL	fU	Min.	Max.								Typ.	Min.	Typ.	Min.
9	11	DC	2	5.8	0.20	7.0	41	30	40	30	58	48	68	58

Operating LO power: 10±1dBm
1dB Compression: 0dBm typical
Conversion Loss: (I+Q) power, dBm - RF power, dBm
Carrier and sideband rejections measured at -5dBm I/Q power.

Typical Performance Data




Carrier Freq. (MHz)	Conversion Loss		Sideband Rejection(x)		Carrier Rejection(x)		3rd. Harmonic Suppression(x)		5th. Harmonic Suppression(x)		DC Offset (x) (mV)
	\bar{x} (dB)	σ (dB)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	
9.00	5.75	0.05	35.58	36.08	57.16	56.84	59.79	50.88	67.42	70.24	0.08
9.11	5.74	0.05	35.91	36.34	57.12	57.23	60.05	50.93	67.39	70.97	0.08
9.21	5.76	0.05	36.15	36.57	56.98	57.32	59.95	50.99	67.41	70.92	0.08
9.32	5.75	0.05	36.38	36.88	57.33	56.88	59.83	51.01	67.29	71.08	0.08
9.42	5.75	0.05	36.60	37.17	57.09	57.26	60.02	51.06	67.09	71.26	0.08
9.53	5.75	0.04	36.86	37.38	57.33	57.59	60.13	51.09	67.20	71.66	0.08
9.63	5.74	0.04	37.17	37.62	57.47	57.27	59.87	51.10	67.03	72.10	0.08
9.74	5.75	0.04	37.33	37.84	57.23	56.86	60.06	51.10	66.99	71.83	0.08
9.84	5.74	0.04	37.40	37.92	56.85	57.27	60.39	51.30	67.19	72.23	0.08
9.95	5.74	0.05	37.79	38.40	56.95	57.76	60.28	51.26	67.45	69.86	0.08
10.05	5.74	0.06	37.97	38.68	56.95	56.86	60.29	51.26	67.15	70.00	0.08
10.16	5.74	0.06	38.14	38.80	56.73	57.25	60.17	51.25	67.47	73.11	0.08
10.26	5.77	0.06	38.39	38.96	56.82	57.24	60.15	51.31	67.55	72.08	0.08
10.37	5.76	0.07	38.69	39.40	56.82	57.23	59.95	51.30	67.32	71.97	0.08
10.47	5.78	0.06	38.88	39.56	56.64	57.39	59.91	51.25	67.51	72.22	0.09
10.58	5.77	0.06	39.02	39.64	56.96	57.09	60.13	51.32	67.43	72.29	0.09
10.68	5.75	0.06	39.12	39.63	56.83	57.08	60.23	51.32	67.66	72.08	0.09
10.79	5.78	0.07	39.25	39.80	57.09	57.23	60.03	51.30	67.29	72.10	0.09
10.89	5.79	0.07	39.53	40.09	56.74	57.01	59.84	51.21	67.74	71.68	0.09
11.00	5.78	0.07	39.79	40.25	56.63	57.17	59.63	51.17	67.13	72.17	0.09

Outline Drawing

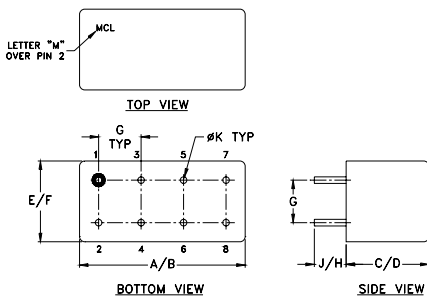


Outline Dimensions (inch mm)

A	B	C	D	E	F
.770	.800	.285	.310	.370	.400
19.56	20.32	7.24	7.87	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

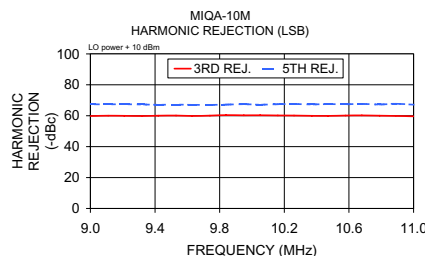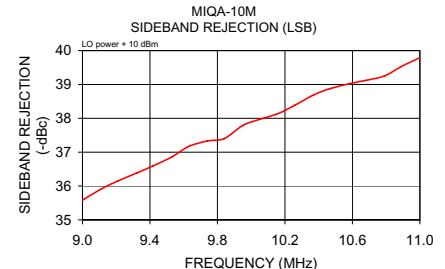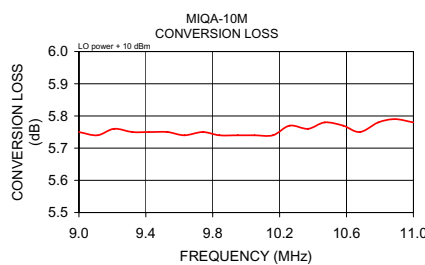

I&Q modulation block diagram



Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. OR
M97465
MIQA-10M
DJ/VV/CP
070523