

# Voltage Controlled Oscillator

# MOS-748-119+

Linear Tuning 690 to 749 MHz

## Features

- Linear tuning characteristics
- Low phase noise
- Very low pulling
- Very low pushing
- Aqueous washable

## Applications

- Wireless communications
- CDMA
- Wireless radio, microphone & TV broadcasting



CASE STYLE: CZ682  
PRICE: \$ 15.95 ea. QTY (5-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

## Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER		
	Min.	Max.		Typ.				VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	Typ.		Typ.	Typ.			Typ.	Vcc (volts)	Current (mA)
				1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.		Typ.	Typ.			Max.	Max.	
MOS-748-119+	690	749	0	-91	-115	-136	-155	0.5	14	7	81	32	-90	-18	-10	0.3	0.06	5	31	

## Pin Connections


RF OUT	5
VCC	3
V-TUNE	1
GROUND	2,4,6,7,8

## Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6.6V
Absolute Max. Tuning Voltage (Vtune)	15.0V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

## Outline Drawing

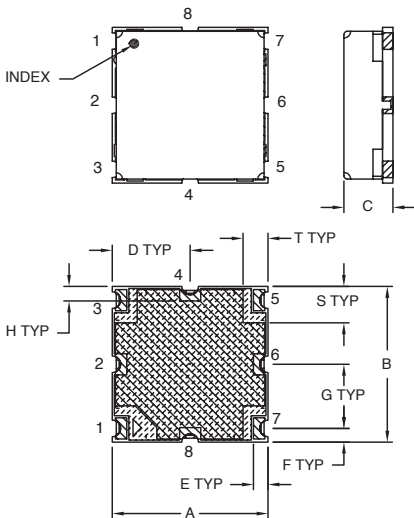


## PCB Land Pattern



SUGGESTED LAYOUT, TOLERANCE TO BE WITHIN ±.002

- METALLIZATION
- SOLDER RESIST

## Demo Board MCL P/N: TB-128 Suggested PCB Layout (PL-023)

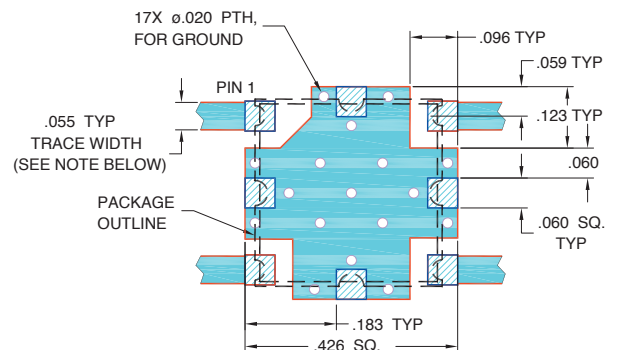

- NOTES:
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Dimensions (Inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.375	.375	.131	.188	.035	.033	.154	.040	.446	.193	.060	.446	.039	.154	.060	.368	.087	.060	grams
9.52	9.52	3.33	4.78	0.89	0.84	3.91	1.02	11.33	4.90	1.52	11.33	0.99	3.91	1.52	9.35	2.22	1.52	0.60



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. OR  
M127650  
EDR-9990/1F1  
MOS-748-119+  
RAV  
100606  
Page 1 of 2

# Performance Data & Curves\*

# MOS-748-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 720 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	10.99	679.5	676.8	674.2	1.03	0.72	0.12	25.58	-18.7	-37.3	-38.9	0.22	0.12	-90.5	-115.5	-136.2	-155.0	1.0	-91.67
0.50	8.97	684.8	682.3	679.9	1.00	0.70	0.13	25.60	-18.6	-37.3	-39.0	0.14	0.22	-90.8	-115.9	-136.4	-155.3	2.0	-99.61
1.00	7.97	689.1	686.7	684.5	0.96	0.67	0.13	25.61	-18.5	-38.9	-38.5	0.11	0.32	-92.0	-115.7	-136.6	-154.7	3.5	-105.85
1.50	7.39	693.1	690.7	688.5	0.92	0.64	0.12	25.62	-18.5	-39.1	-38.2	0.09	0.38	-92.5	-115.9	-136.6	-156.2	6.0	-110.92
2.00	7.03	696.7	694.4	692.2	0.87	0.60	0.10	25.63	-18.4	-40.9	-37.9	0.08	0.41	-91.5	-115.3	-136.4	-155.0	8.5	-114.27
3.00	6.67	703.6	701.3	699.2	0.75	0.51	0.04	25.65	-18.1	-41.7	-37.1	0.07	0.33	-91.3	-116.0	-136.5	-156.0	10.0	-115.78
4.00	6.55	710.2	708.0	705.8	0.61	0.39	-0.05	25.67	-18.1	-46.3	-37.7	0.05	0.15	-91.9	-115.8	-136.3	-155.3	20.8	-122.52
5.00	6.46	716.7	714.5	712.3	0.45	0.25	-0.16	25.69	-18.0	-48.1	-37.4	0.05	0.21	-92.8	-116.2	-136.5	-155.4	35.5	-127.35
6.00	6.36	723.1	720.9	718.7	0.28	0.09	-0.29	25.70	-17.8	-49.5	-37.2	0.04	0.32	-92.5	-115.6	-136.4	-155.0	60.7	-131.81
7.00	6.26	729.4	727.3	725.1	0.13	-0.05	-0.42	25.71	-17.5	-46.6	-37.3	0.03	0.39	-91.2	-115.8	-136.5	-154.9	86.7	-135.20
8.00	6.23	735.7	733.5	731.3	-0.02	-0.19	-0.54	25.73	-17.4	-44.0	-37.0	0.02	0.38	-91.7	-115.5	-136.4	-154.6	100.0	-136.57
9.00	6.25	741.9	739.8	737.6	-0.15	-0.32	-0.65	25.73	-17.4	-43.3	-35.9	0.01	0.31	-92.4	-115.6	-136.2	-155.1	148.1	-139.73
9.50	6.27	745.0	742.9	740.7	-0.21	-0.38	-0.71	25.74	-17.4	-42.2	-35.4	0.01	0.25	-91.6	-115.5	-135.9	-154.4	177.0	-141.08
10.00	6.30	748.1	746.0	743.8	-0.27	-0.44	-0.76	25.75	-17.5	-41.3	-35.3	0.01	0.19	-92.7	-115.5	-135.9	-153.9	211.6	-142.83
10.50	6.33	751.2	749.2	747.0	-0.33	-0.50	-0.82	25.75	-17.6	-40.3	-35.3	0.01	0.12	-90.7	-115.6	-136.2	-154.7	302.4	-146.06
11.00	6.34	754.4	752.3	750.1	-0.38	-0.55	-0.87	25.75	-17.5	-39.8	-34.6	0.01	0.09	-92.0	-115.6	-135.8	-154.2	361.5	-147.17
12.00	6.31	760.7	758.7	756.5	-0.48	-0.65	-0.96	25.77	-17.5	-38.1	-33.8	0.03	0.20	-92.1	-115.4	-136.0	-156.0	507.5	-150.16
13.00	6.09	766.9	764.9	762.8	-0.58	-0.75	-1.06	25.79	-17.4	-37.2	-34.1	0.08	0.36	-92.1	-115.6	-135.6	-155.1	606.7	-151.69
13.50	5.88	769.9	768.0	765.8	-0.63	-0.81	-1.11	25.79	-17.4	-37.2	-33.7	0.12	0.41	-92.9	-115.4	-135.8	-155.2	851.6	-154.39
14.00	5.60	772.9	770.9	768.8	-0.67	-0.85	-1.15	25.80	-17.3	-36.7	-33.4	0.17	0.45	-91.9	-115.1	-135.7	-154.6	1000.0	-155.10

\*at 25°C unless mentioned otherwise

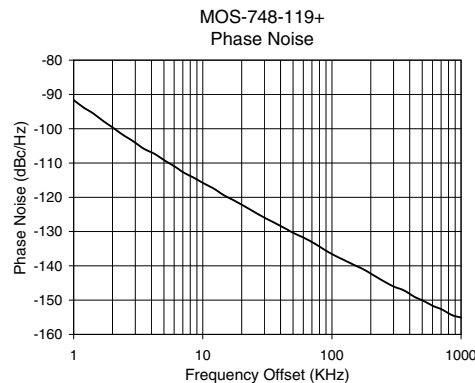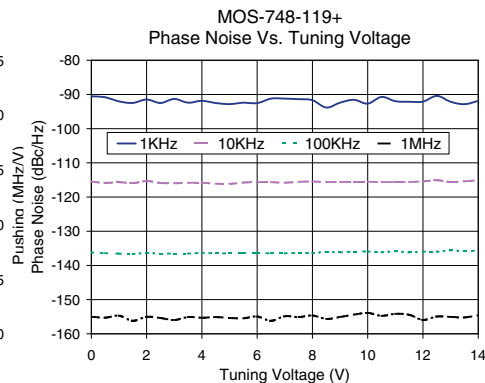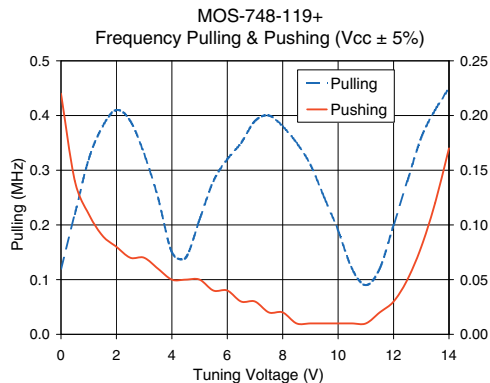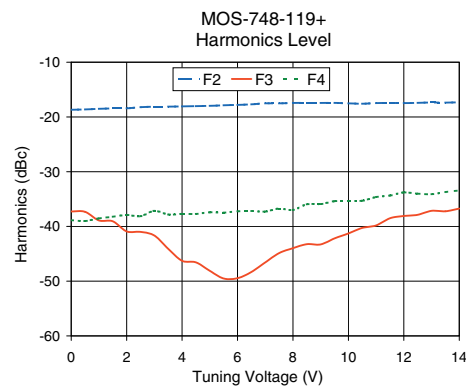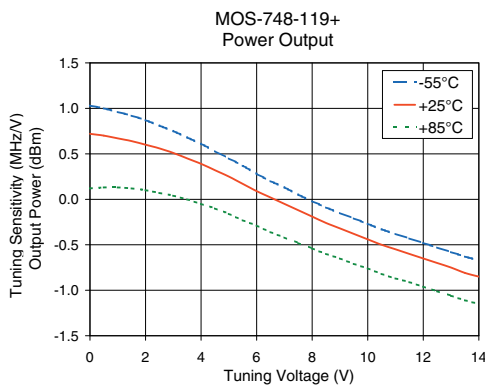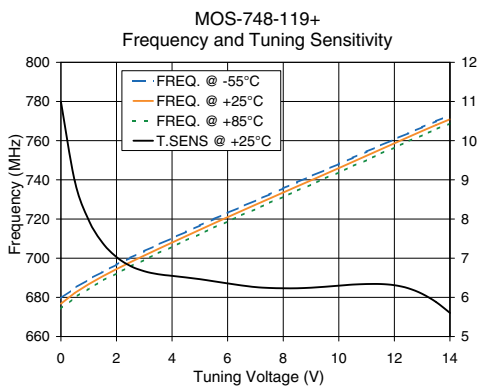

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).