

High IP3 Voltage Variable Attenuator

MVA-1000+

50Ω 50 to 1000 MHz


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	7V
Absolute Max. Control Voltage(Vctrl)	6V
Absolute Max. RF Input Level	+20 dBm

Pin Connections

RF IN	6
RF OUT	2
V CONTROL	4
V+	8
GROUND	1,3,5,7


Outline Drawing

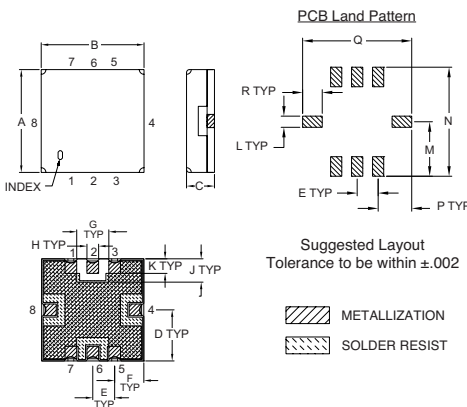

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.150	.175	.075	.100	.110	.040	.080
8.89	8.89	3.81	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R	wt.	
.050	.040	.195	.390	.120	.390	.070	grams	
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.50	

Demo Board MCL P/N: TB-286 Suggested PCB Layout (PL-154)

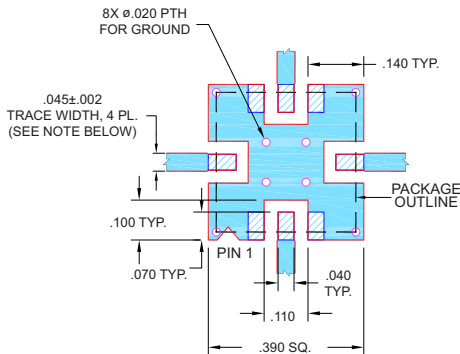

NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Frequency range, 50-1000 MHz
- High linearity, 3 dB/V typ. at Vcont from 1V to 5V
- High IP3, +52 dBm typ.
- Small phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case
- Aqueous washable

Applications

- CATV
- Power level control
- Feed forward amplifiers
- Public safety radio



CASE STYLE: GP1212
PRICE: \$ 9.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)	MIN. INSERTION LOSS, dB (+5V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Max.	Max.			Typ.	Typ.
50 - 1000	3.6	4.7	13.0	11.5	+20	0 - 5	15	52	20	+5	3


Notes:

Rise/Fall time: 20 μSec/60 μSec Typ.
Switching Time, turn on/off: 50 μSec Typ.

Equivalent Schematic

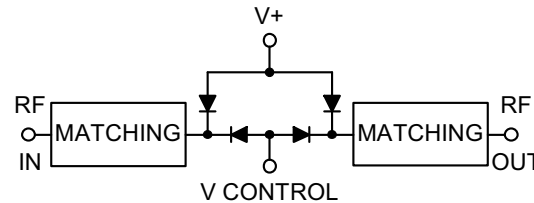

MVA-1000+ TYPICAL ATTENUATION AT 500MHz

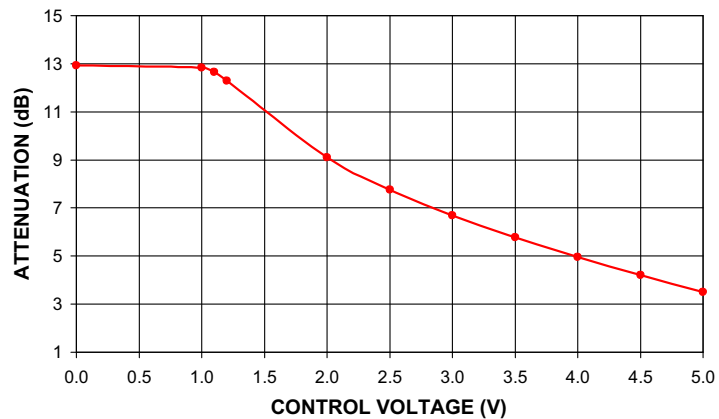

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


IF/RF MICROWAVE COMPONENTS

REV. OR
M106828
EDR-8292F1
MVA-1000+
RAV
090510
Page 1 of 2


MVA-1000+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES

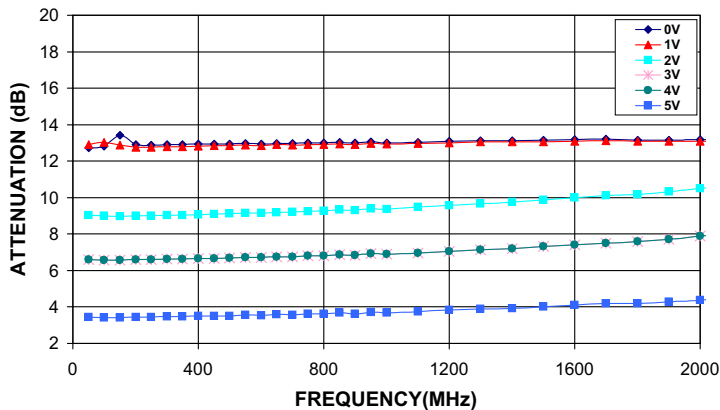


MVA-1000+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 500MHz

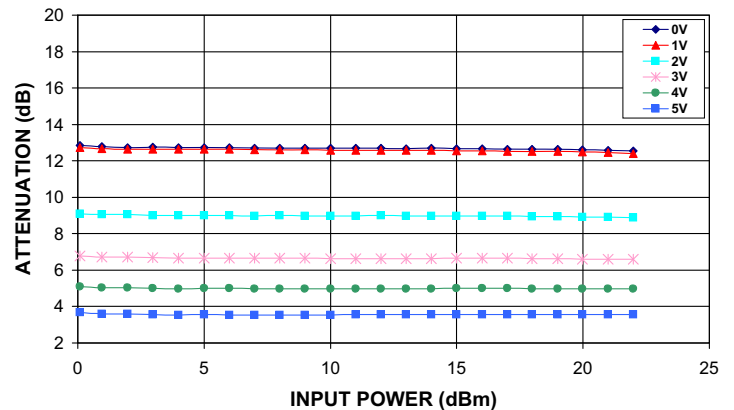


MVA-1000+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

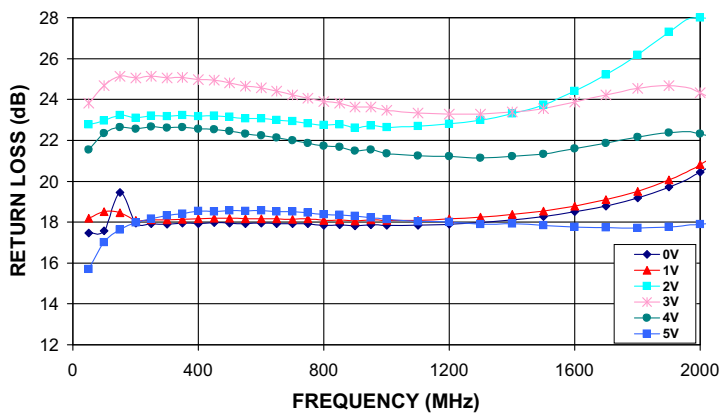

MVA-1000+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

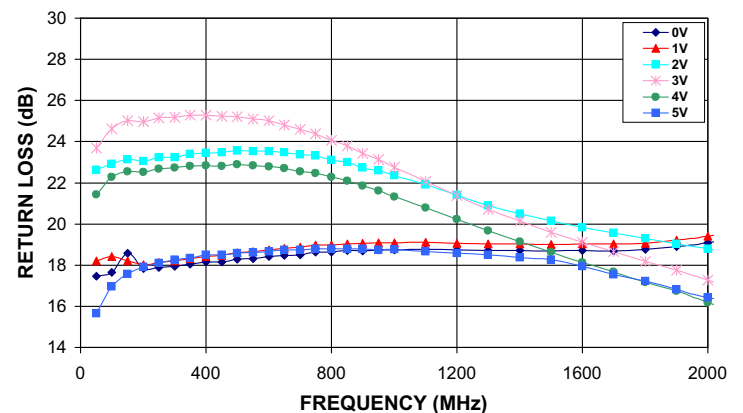

MVA-1000+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES

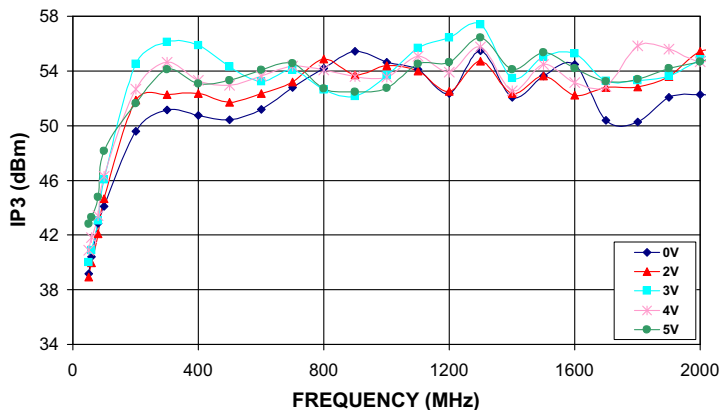

MVA-1000+
PHASE SHIFT Vs. FREQUENCY
Vs. CONTROL VOLTAGE

