

DC Passing Attenuator Fixed


50Ω 650 to 4000 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

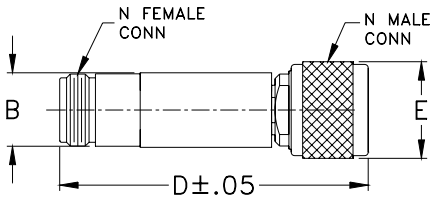

Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

Electrical Schematic

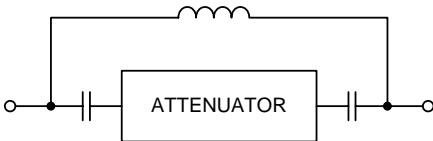

Features

- high DC current handling
- high DC breakdown voltage
- DC resistance (in/out) 0.1Ω, typ.

Applications

- power passing
- instrumentation
- test equipment
- lab use

NAT-15DC-1A+



CASE STYLE: FF57			
Connectors	Model	Price	Qty.
N-Type	NAT-15DC-1A+	\$19.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)



The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications (T_{AMB} = 25°C)

FREQUENCY (MHz)	ATTENUATION (dB)		VSWR (:1)	POWER (mW)	DC CURRENT (Amps)	DC BREAKDOWN (Volts)
	Nom.	Flatness, Max.	Max.	Max.	Max.	Max.
650-4000	15±0.7	±0.8	1.7	1000	1	50

Typical Performance Data at 25°C

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
650.00	15.08	1.15
700.00	14.92	1.09
800.00	14.90	1.06
900.00	15.19	1.07
1000.00	14.89	1.12
1200.00	14.89	1.16
1400.00	14.97	1.19
1600.00	15.03	1.22
1800.00	15.09	1.24
2000.00	15.13	1.26
2200.00	15.18	1.27
2400.00	15.27	1.29
2600.00	15.35	1.30
2800.00	15.41	1.30
3000.00	15.44	1.32
3200.00	15.42	1.30
3400.00	15.52	1.30
3600.00	15.59	1.28
3800.00	15.70	1.25
4000.00	15.88	1.20

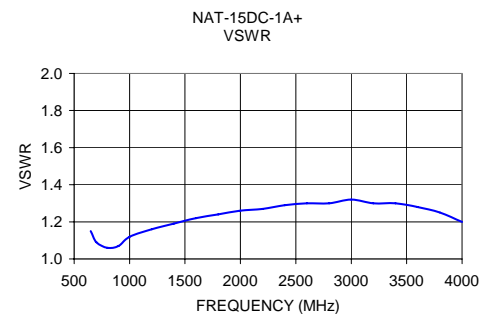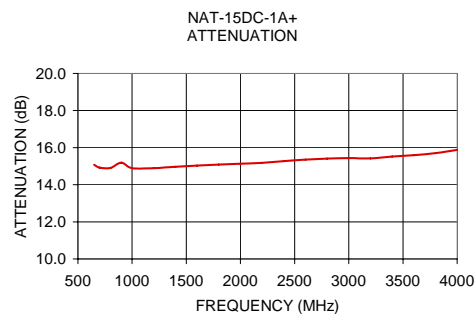

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M109697
NAT-15DC-1A+
ED-12833/1
WZ/CP
090814