

Attenuator Fixed

50Ω 500 to 2300 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C


Features

- high DC current handling
- high DC breakdown voltage
- DC resistance (in/out) 0.1Ω, typ.

Applications

- power passing
- instrumentation
- test equipment
- lab use


Outline Drawing

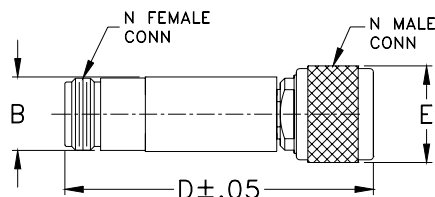

Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

Electrical Schematic

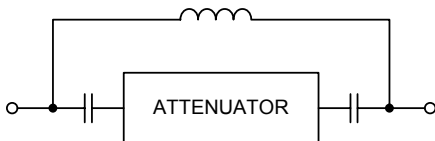

NAT-20DC+



CASE STYLE: FF57			
Connectors	Model	Price	Qty.
N-Type	NAT-20DC+	\$22.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)



The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications (T_{AMB} = 25°C)

FREQUENCY (MHz)	ATTENUATION (dB)		VSWR (:1)	POWER (mW)	DC CURRENT (Amps)	DC BREAKDOWN (Volts)
	Nom.	Flatness, Max.	Max.	Max.	Max.	Max.
500 - 2300	20 ± 0.5	± 1.2	1.80	400	4	125

Typical Performance Data at 25°C

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
500.00	19.49	1.13
600.00	19.77	1.13
700.00	19.96	1.13
800.00	20.10	1.14
900.00	20.14	1.14
1000.00	20.18	1.15
1100.00	20.21	1.16
1200.00	20.14	1.18
1300.00	20.14	1.19
1400.00	20.08	1.21
1450.00	20.07	1.22
1500.00	20.05	1.23
1600.00	20.02	1.26
1700.00	19.95	1.29
1800.00	19.89	1.32
1900.00	19.89	1.36
2000.00	19.86	1.41
2100.00	19.87	1.46
2200.00	19.91	1.53
2300.00	19.98	1.61

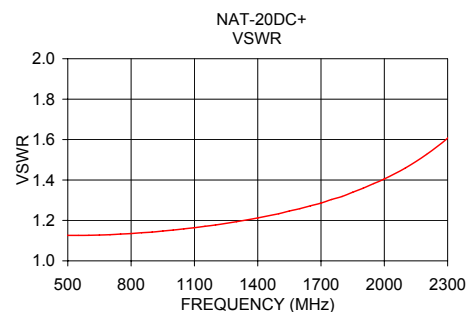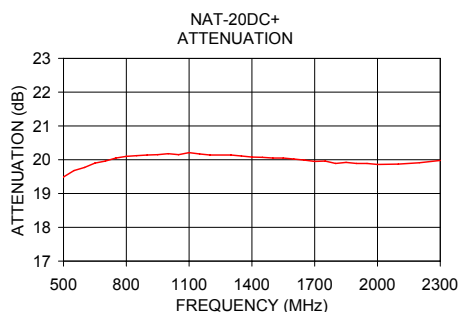

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

REV. OR
M95013
NAT-20DC+
ED-10191
DY/RAV
070326