

Type-N/BNC Adaptenuator

50Ω 0.5W 6dB DC to 2000 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 150°C

Permanent damage may occur if any of these limits are exceeded.

Features

- improved interface matching
- wideband, DC to 2000 MHz, useable to 4000 MHz
- excellent VSWR, 1.1:1 typ.
- excellent flatness, ± 0.1 dB typ.
- rugged unibody construction

NM-BM-6




CASE STYLE: DJ865

Connectors	Model	Price	Qty.
Conn1 N-Male	Conn2 BNC-Male	NM-BM-6	\$19.95 ea. (1-24)

Applications

- instrumentation
- provides attenuation and connector type change
- minimizes hardware

Outline Drawing

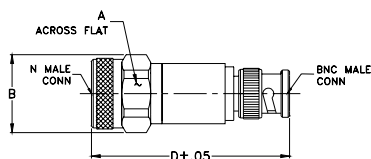

Electrical Specifications

FREQ. (MHz)	ATTENUATION (dB)								VSWR (:1)						MAX. INPUT POWER (W)
	Flatness*														
	DC-500 MHz			DC-1000 MHz			DC-2000 MHz		DC-500 MHz		DC-1000 MHz		DC-2000 MHz		
	Nom.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.		
f _L -f _U															
DC-2000	6±0.3	0.05	0.15	0.15	0.25	0.20	0.25	1.1	1.2	1.1	1.2	1.2	1.25	0.5	

*Flatness defined as peak to peak attenuation over band divided by 2.




Typical Performance Data

FREQUENCY (MHz)	ATTENUATION (dB)	VSWR (:1)	
		BNC-Male	N-Male
1.00	5.99	1.00	1.00
5.00	5.98	1.00	1.00
10.00	5.98	1.00	1.00
50.00	5.99	1.00	1.01
100.00	6.01	1.01	1.01
500.00	6.05	1.03	1.04
1000.00	6.08	1.06	1.06
1500.00	6.12	1.07	1.08
1700.00	6.13	1.06	1.08
2000.00	6.16	1.05	1.06

Outline Dimensions (inch/mm)

A	B	D	wt
.812	.88	2.25	grams
20.62	22.35	57.15	63.8

Electrical Schematic

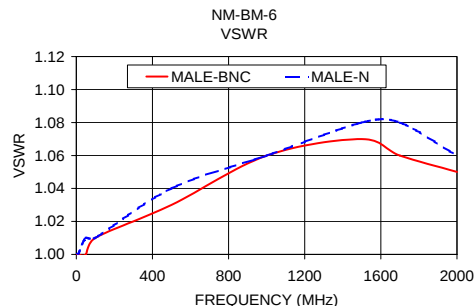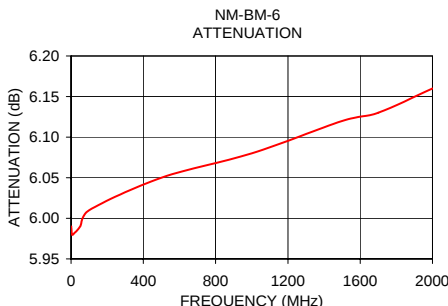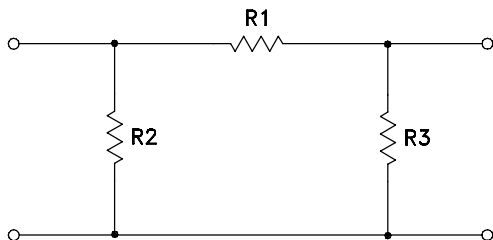

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine



Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. B
M96826
EE-9890
NM-BM-6
URJ/TD/CP/AM
090720