


Plug-In Attenuator/Switch

PAS-2+

50Ω Bi-Phase 10 to 1000 MHz



CASE STYLE: A01
PRICE: \$53.70 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	8
CONTROL	3,4^
GROUND	2,5,6,7
CASE GROUND	2,5,6,7

^ pins must be connected together externally

Outline Drawing

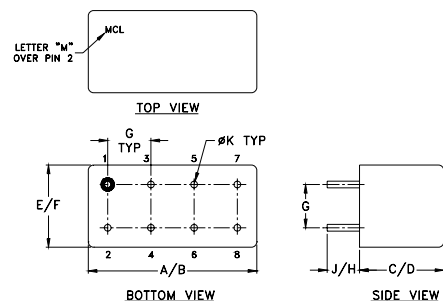

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- wideband, 10 to 1000 MHz
- hermetic case
- high in-out isolation
- excellent amplitude and phase unbalance

Applications


- bi-phase modulator
- electronic attenuator
- military hi-rel applications

Attenuator/Switch Electrical Specifications


FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA			BI-PHASE X̄ (±20 mA) Typ.	
			L	M	U	ΔAMP (dB)	Phase (deg.) deviation from 180°
10-1000	DC-0.05	20 29	50 40	40 30	35 25	0.1 0.3	0.5 1.0

L = low range [f_L to f_U] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U] m = [2 f_L to f_U/2]
Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

suggested control port biasing configuration






electrical schematic



Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)		20mA ΔPhase (deg.)	Isolation (dB) (in-out) (in-con)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl deg.			Input VSWR		
		10	500		1000	10			500	1000	10	500	1000				
10.0	3.50	0.025	0.01	180.00	70	47	12.3	0.0000	71.8	43.8	38.2	-37.1	96.0	63.6	3.6	2.9	7.5
19.9	3.52	0.015	0.01	180.00	68	40	12.7	0.0003	63.7	44.2	38.1	-34.3	93.2	62.4	3.6	2.9	7.5
39.7	3.61	0.008	0.01	179.90	67	35	12.6	0.0004	55.7	43.8	38.1	-12.5	86.0	57.8	3.6	2.9	7.5
59.5	3.63	0.006	0.01	179.90	65	31	12.5	0.0016	51.2	43.3	38.1	-8.5	80.1	52.8	3.6	2.8	7.4
79.3	3.66	0.006	0.01	179.90	64	29	12.5	0.0057	45.4	41.1	36.8	-4.6	55.5	35.7	3.6	2.8	7.3
86.7	3.68	0.006	0.01	179.90	63	28	12.5	0.0105	41.5	38.6	35.6	-1.2	42.6	23.4	3.5	2.8	7.1
99.1	3.73	0.006	0.01	179.90	62	27	12.4	0.0161	38.3	36.0	33.7	1.5	34.4	12.9	3.5	2.8	6.9
163.5	3.95	0.006	0.01	179.80	58	23	12.3	0.0286	33.9	31.8	30.1	3.6	24.5	0.6	3.4	2.7	6.6
237.7	4.03	0.007	0.01	179.70	55	20	12.1	0.0437	30.3	28.4	27.1	4.3	20.7	-5.6	3.3	2.6	6.2
314.4	4.05	0.008	0.01	179.37	52	18	12.0	0.0734	26.2	24.4	23.2	5.1	16.3	-9.9	3.1	2.4	5.6
391.2	4.23	0.012	0.02	179.60	50	17	12.1	0.1029	23.6	21.8	20.8	5.0	14.4	-11.4	2.9	2.3	5.2
467.9	4.36	0.017	0.04	179.60	48	17	12.3	0.1510	20.7	19.1	18.2	5.0	12.8	-11.9	2.7	2.1	4.7
500.1	4.38	0.021	0.04	179.60	47	17	12.4	0.2540	17.1	15.6	15.1	4.6	10.4	-11.1	2.4	1.8	4.0
542.1	4.48	0.027	0.06	179.50	46	17	12.5	0.3743	14.6	13.3	13.1	4.3	9.0	-9.9	2.1	1.6	3.6
618.9	4.63	0.040	0.10	179.50	44	18	12.6	0.6438	11.5	10.6	10.8	3.5	6.9	-7.5	1.7	1.3	3.1
695.6	4.90	0.053	0.13	179.60	43	20	12.1	0.9350	9.7	9.1	9.6	3.0	5.4	-6.0	1.5	1.2	2.9
772.3	5.02	0.064	0.16	179.38	41	23	10.8	1.7496	7.2	7.2	8.2	2.0	3.6	-3.6	1.2	1.1	2.7
846.6	5.51	0.073	0.16	179.70	41	21	9.1	2.6537	5.5	5.9	7.3	1.3	1.9	-1.8	1.2	1.3	2.7
923.3	6.21	0.087	0.21	179.80	40	17	7.5	7.3045	4.3	4.9	6.7	0.5	0.6	-0.7	1.4	1.5	2.6
1000.0	7.06	0.093	0.36	180.40	40	14	6.3	15.1437	3.6	4.5	6.4	0.1	0.1	-0.1	1.5	1.6	2.6

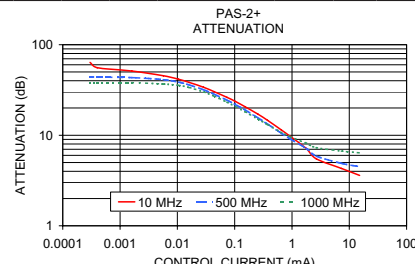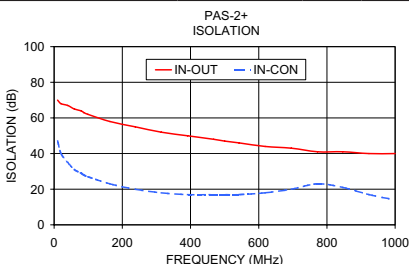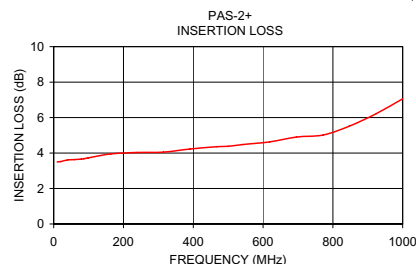

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

For detailed performance specs & shipping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M126372
PAS-2+
WP/TD/CP/AM
100215