


Plug-In Power Splitter/Combiner

PSC-10-1+ PSC-10-1

10 Way-0° 50Ω 1 to 150 MHz



Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.87W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	29
PORT 1	7
PORT 2	16
PORT 3	31
PORT 4	24
PORT 5	9
PORT 6	2
PORT 7	26
PORT 8	17
PORT 9	4
PORT 10	5
GROUND	all other pins
CASE GROUND	all other pins
NOT USED	15

Outline Drawing

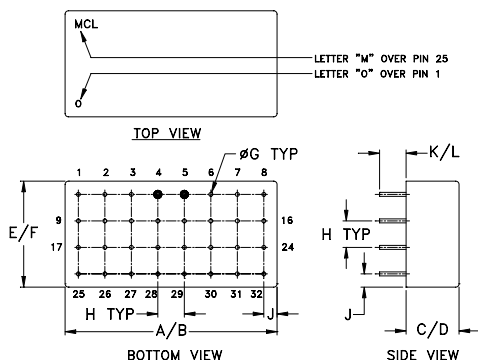

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.580	1.620	.380	.410	.770	.810	.030
40.13	41.15	9.65	10.41	19.56	20.57	0.76
H	J	K	L			wt
.200	.10	.20	.14			grams
5.08	2.54	5.08	3.56			23.0

Features

- low insertion loss, 0.4 dB typ.
- good isolation, 27 dB typ.
- excellent amplitude unbalance, 0.3 dB typ.
- rugged welded case

Applications

- HF/VHF
- amateur radio
- FM broadcasting

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 10 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)							
	L	M	U	L	M	U	L	M	U	L	M	U					
$f_c - f_u$	Typ.	Min.	Typ. Min.	Typ.	Max.	Typ. Max.	Typ.	Max.	Typ. Max.	Max.	Max.	Max.					
1-150	36	23	27 23	23	18	0.3	0.6	0.4	0.8	1.0	1.3	3	6	10	0.2	0.3	0.4

L = low range [f_l to 10 f_l] M = mid range [10 f_l to $f_u/2$] U = upper range [$f_u/2$ to f_u]


Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 1
			1-2	1-6			
1.00	10.48	0.04	33.61	52.48	0.24	1.12	1.37
5.00	10.31	0.04	37.77	59.69	0.40	1.07	1.17
10.00	10.31	0.03	38.38	60.63	0.67	1.08	1.14
20.00	10.34	0.03	36.88	57.86	1.29	1.11	1.13
50.00	10.47	0.06	31.99	51.48	3.16	1.20	1.12
60.00	10.51	0.08	30.90	50.14	3.76	1.24	1.11
70.00	10.57	0.08	29.99	49.39	4.32	1.26	1.11
80.00	10.61	0.09	29.29	48.27	4.93	1.29	1.10
90.00	10.66	0.10	28.72	47.59	5.42	1.31	1.09
100.00	10.68	0.13	28.31	46.91	6.06	1.33	1.08
110.00	10.70	0.13	28.05	46.24	6.58	1.34	1.07
120.00	10.71	0.14	27.91	45.72	7.11	1.34	1.07
130.00	10.73	0.16	27.91	45.17	7.57	1.33	1.06
140.00	10.76	0.17	28.06	44.65	8.11	1.31	1.06
150.00	10.79	0.20	28.36	44.21	8.72	1.30	1.06


PSC-10-1 INSERTION LOSS

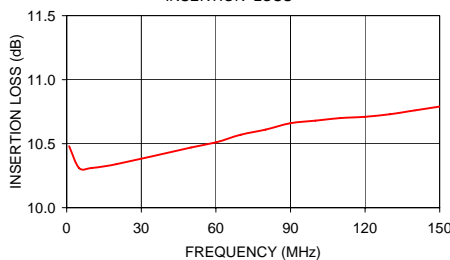


PSC-10-1 ISOLATION

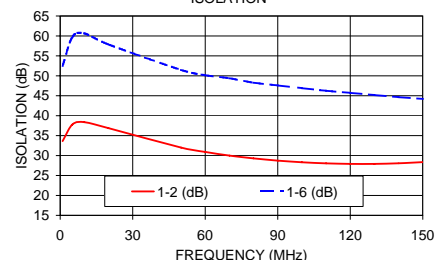

PSC-10-1 VSWR

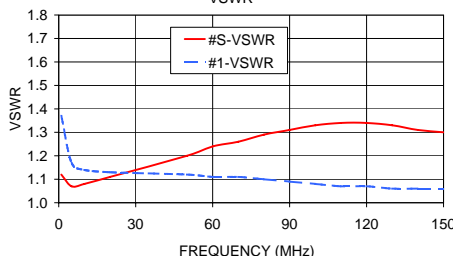

electrical schematic

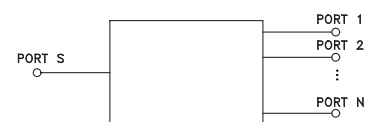

For detailed performance specs & shopping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M95083
PSC-10-1
HY/TD/CP
090827