


Plug-In

Power Splitter/Combiner

2 Way-0° 50Ω 400 to 1000 MHz

PSC-2-1000+
PSC-2-1000



CASE STYLE: A06
PRICE: \$27.20 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8
CASE GROUND	2,3,4,7,8

Features

- low insertion loss, 0.5 dB typ.
- high isolation, 35 dB typ.
- rugged welded construction


Applications

- UHF
- defense & federal communication
- cellular

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_c - f_u$	Typ.	Min	Typ.	Max.	Max.	Max.
400-1000	35	25	0.5	1.0	2.0	0.3

Outline Drawing

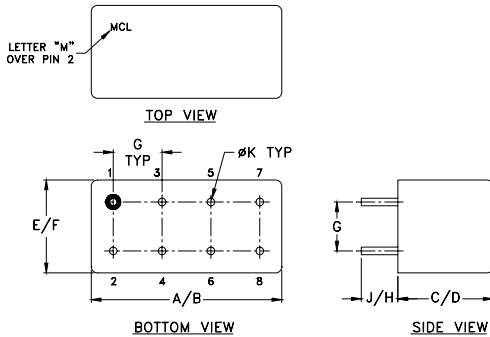




Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.285	.310	.370	.400
19.56	20.32	7.24	7.87	9.40	10.16

G	H	J	K	Wt
.200	.20	.14	.031	grams
5.08	5.08	3.56	0.79	5.2

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
400.00	3.44	3.41	0.03	36.84	0.11	1.15	1.20	1.19
430.00	3.45	3.42	0.03	36.97	0.11	1.15	1.19	1.19
460.00	3.46	3.44	0.03	37.10	0.10	1.15	1.19	1.19
490.00	3.48	3.45	0.03	37.20	0.10	1.16	1.19	1.19
535.00	3.49	3.46	0.03	37.33	0.10	1.15	1.19	1.19
580.00	3.49	3.46	0.03	37.44	0.10	1.15	1.19	1.18
625.00	3.48	3.45	0.03	37.46	0.11	1.16	1.19	1.18
670.00	3.47	3.44	0.03	37.51	0.12	1.15	1.19	1.18
715.00	3.46	3.43	0.03	37.51	0.12	1.15	1.19	1.18
760.00	3.46	3.42	0.03	37.50	0.12	1.15	1.18	1.18
805.00	3.45	3.42	0.03	37.47	0.12	1.15	1.18	1.18
850.00	3.46	3.42	0.03	37.43	0.12	1.15	1.18	1.18
895.00	3.46	3.43	0.03	37.38	0.13	1.15	1.18	1.18
940.00	3.46	3.43	0.03	37.35	0.12	1.15	1.18	1.17
1000.00	3.48	3.44	0.03	37.28	0.12	1.15	1.18	1.17

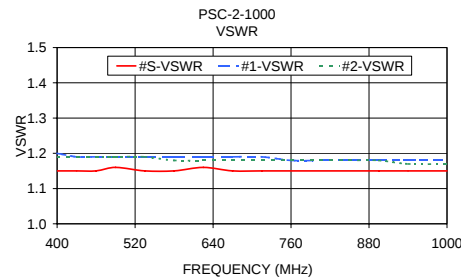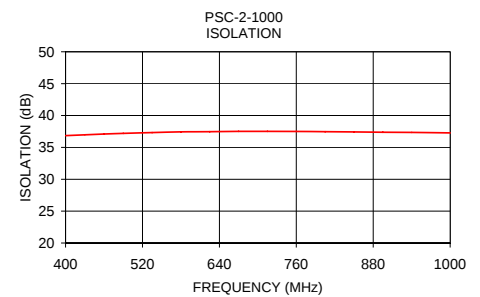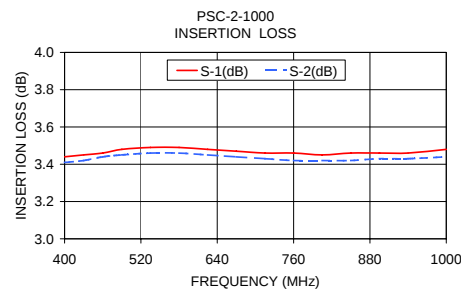

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IFIRF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M111708
PSC-2-1000
HY/TD/CP/AM
090824