


Plug-In

Power Splitter/Combiner

PSCQ-2-10.5+
PSCQ-2-10.5

2 Way-90° 50Ω 9 to 11 MHz



CASE STYLE: A01
PRICE: \$18.20 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	5
GROUND	3,4,7,8
CASE GROUND	3,4,7,8
50 OHM TERM EXTERNAL	6

Features

- low insertion loss, 0.4 dB typ.
- good high isolation, 25 dB typ.
- excellent phase unbalance, 1 deg. typ.
- excellent VSWR, 1.10:1 typ.
- rugged shielded case


Applications

- modulators
- balanced amplifiers

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
9-11	25 20	0.4 0.7	3	1.2

Outline Drawing



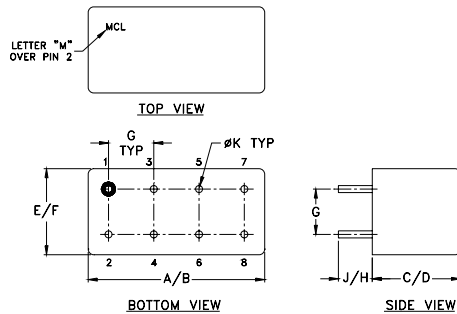


Outline Dimensions (inch/mm)


A	B	C	D	E	F	
.770	.800	.385	.400	.370	.400	
19.56	20.32	9.78	10.16	9.40	10.16	wt
G	H	J	K			grams
.200	.20	.14	.031			5.2
5.08	5.08	3.56	0.79			

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
9.00	3.47	2.66	0.81	25.21	89.68	1.09	1.10	1.10
9.05	3.44	2.68	0.76	25.20	89.73	1.09	1.10	1.10
9.15	3.40	2.72	0.68	25.20	89.70	1.09	1.10	1.10
9.25	3.35	2.76	0.59	25.20	89.76	1.09	1.10	1.10
9.35	3.32	2.81	0.51	25.20	89.74	1.09	1.10	1.10
9.50	3.25	2.86	0.39	25.20	89.73	1.09	1.10	1.10
9.65	3.19	2.93	0.26	25.20	89.71	1.09	1.10	1.10
9.80	3.13	2.99	0.14	25.20	89.76	1.09	1.10	1.10
10.00	3.05	3.08	0.03	25.22	89.74	1.09	1.10	1.10
10.20	2.98	3.16	0.19	25.24	89.77	1.09	1.10	1.10
10.40	2.90	3.24	0.34	25.25	89.78	1.09	1.10	1.10
10.60	2.83	3.32	0.49	25.27	89.77	1.09	1.10	1.10
10.80	2.77	3.42	0.64	25.30	89.77	1.09	1.10	1.10
10.95	2.72	3.48	0.75	25.32	89.79	1.09	1.10	1.10
11.00	2.71	3.50	0.79	25.33	89.79	1.09	1.10	1.10

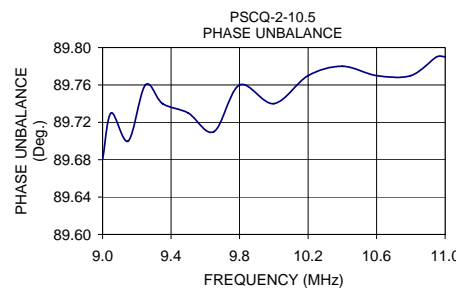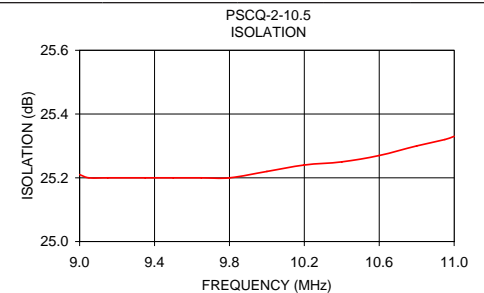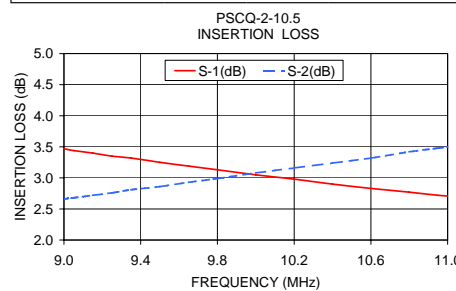

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M111708
PSCQ-2-10.5
HY/TD/CP/AM
090824