

Surface Mount Power Splitter/Combiner

QBA-24+ QBA-24

2 Way-90° 50Ω 1900 to 2400 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	1
PORT 1 (+90°)	10
PORT 2 (0°)	6
GROUND	2,3,4,7,8,9
50 OHM TERM EXTERNAL	5

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002
ADJACENT GROUND PINS SHALL BE CONNECTED TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.250	.300	.050	.310	.050	.015	.050	.066	
6.35	7.62	1.27	7.87	1.27	0.38	1.27	1.68	
J	K	L	M	N	P	Q	R	wt
.030	.095	.330	.100	.020	.015	.070	.014	grams
0.76	2.41	8.38	2.54	0.51	0.38	1.78	0.36	0.2

Demo Board MCL P/N: TB-115+ Suggested PCB Layout (PL-004)

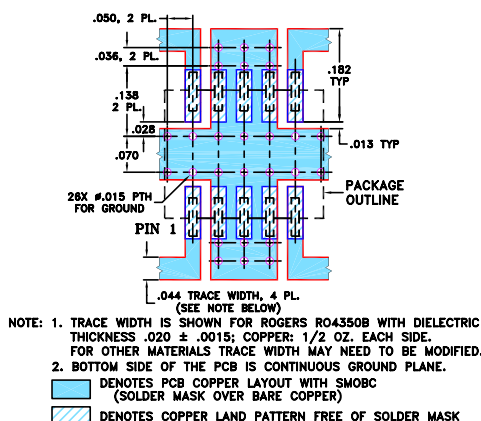

Features

- insertion loss, 0.55 dB typ.
- high power capability, 20W
- good isolation, 21 dB typ.
- ceramic body, good for heat dissipation
- solder plated leads for excellent solderability
- aqueous washable
- protected by U.S. Patent 5,534,830

Applications

- DECT
- PHS
- satellite communications




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS ¹ (dB) Avg. of Coupled Outputs less 3 dB			PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	INPUT POWER ² (W)
	Typ.	Min.	f_L	f_U	σ			
1900-2400	21	17	0.54	0.71	0.02	Max.	Max.	below 25°C


1. Includes test fixture losses.
2. Derate linearly to 4W at 100°C
Thermal compound may be applied to decrease body temperature. See application note AN-10-007

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1700.00	3.86	3.14	0.72	23.07	87.86	1.19	1.24	1.20
1750.00	3.81	3.22	0.59	22.72	87.93	1.19	1.24	1.21
1800.00	3.77	3.27	0.50	22.77	87.90	1.19	1.24	1.21
1850.00	3.74	3.32	0.43	22.67	87.88	1.19	1.23	1.21
1900.00	3.71	3.38	0.32	22.17	87.77	1.19	1.23	1.21
1950.00	3.69	3.40	0.29	22.57	87.76	1.19	1.23	1.22
2000.00	3.69	3.47	0.22	21.77	87.70	1.19	1.22	1.22
2050.00	3.69	3.47	0.23	22.00	87.53	1.20	1.22	1.22
2100.00	3.69	3.52	0.17	21.55	87.48	1.19	1.22	1.21
2150.00	3.71	3.54	0.18	21.42	87.34	1.19	1.21	1.21
2200.00	3.72	3.52	0.20	21.21	87.47	1.19	1.21	1.21
2250.00	3.77	3.54	0.22	21.14	87.29	1.19	1.21	1.20
2300.00	3.79	3.54	0.24	20.76	87.39	1.19	1.20	1.20
2350.00	3.84	3.53	0.31	21.00	87.06	1.18	1.19	1.20
2400.00	3.89	3.55	0.34	20.42	87.13	1.19	1.20	1.20

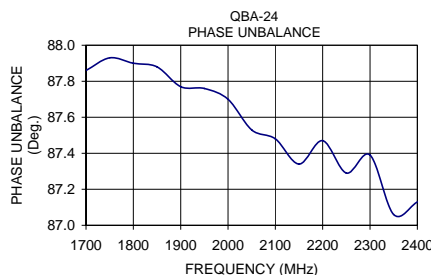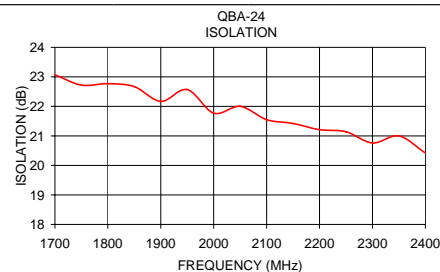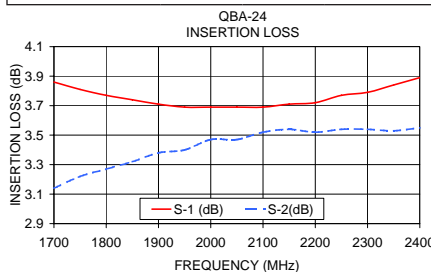

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M102713
EDB-991103/3
QBA-24
BC/WZ/CP
090824