

Ultra-Small Ceramic Power Splitter/Combiner

QCN-5

2 Way-90° 50Ω 330 to 580 MHz



CASE STYLE: FV1206-1

Maximum Ratings

| | |
|--|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 15W* max. |
| * Derate linearly to 7W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded. | |

Pin Connections

| | |
|----------------------|-----|
| SUM PORT | 1 |
| PORT 1 (0°) | 4 |
| PORT 2 (+90°) | 6 |
| GROUND | 2,5 |
| 50 OHM TERM EXTERNAL | 3 |

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 22 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

Applications

- balanced amplifiers
- modulators
- VHF
- defense communication

Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|-----------------------------------|
| 7" | 20, 50, 100, 200, 500, 1000, 3000 |

Electrical Specifications


| FREQ. RANGE (MHz) | ISOLATION (dB) | | INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB | | PHASE UNBALANCE (Degrees) | AMPLITUDE UNBALANCE (dB) | | VSWR (:1) | |
|-------------------|----------------|------|--|------|---------------------------|--------------------------|------|-----------|-----|
| | Typ. | Min. | Typ. | Max. | Typ. Max. | Typ. | Max. | Typ. | |
| f_L - f_U | | | | | | | | | |
| 330-580 | | | | | | | | | |
| 330-400 | 20 | 18 | 0.40 | 0.6 | 2.5 | 5 | 0.6 | 1.1 | 1.2 |
| 400-525 | 20 | 15 | 0.55 | 0.8 | 2.5 | 4 | 0.5 | 0.9 | 1.3 |
| 525-580 | 16 | 12 | 0.90 | 1.3 | 3.0 | 6 | 1.4 | 1.8 | 1.5 |

1. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D+" to part no. DC resistance to ground is 100 Mohms min.

Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 330.00 | 2.95 | 3.75 | 0.81 | 22.84 | 87.70 | 1.15 | 1.20 | 1.13 |
| 340.00 | 3.02 | 3.67 | 0.66 | 22.76 | 87.70 | 1.15 | 1.20 | 1.14 |
| 360.00 | 3.15 | 3.54 | 0.39 | 22.58 | 87.71 | 1.15 | 1.20 | 1.14 |
| 380.00 | 3.27 | 3.44 | 0.17 | 22.39 | 87.72 | 1.15 | 1.21 | 1.15 |
| 400.00 | 3.37 | 3.36 | 0.01 | 22.16 | 87.76 | 1.15 | 1.22 | 1.16 |
| 410.00 | 3.41 | 3.33 | 0.08 | 22.02 | 87.81 | 1.15 | 1.22 | 1.17 |
| 430.00 | 3.48 | 3.30 | 0.18 | 21.70 | 87.89 | 1.16 | 1.23 | 1.19 |
| 470.00 | 3.55 | 3.31 | 0.24 | 20.79 | 88.22 | 1.17 | 1.26 | 1.23 |
| 480.00 | 3.56 | 3.33 | 0.22 | 20.51 | 88.34 | 1.18 | 1.27 | 1.24 |
| 500.00 | 3.55 | 3.40 | 0.15 | 19.91 | 88.64 | 1.20 | 1.30 | 1.28 |
| 510.00 | 3.54 | 3.45 | 0.08 | 19.57 | 88.84 | 1.21 | 1.31 | 1.30 |
| 530.00 | 3.49 | 3.58 | 0.09 | 18.83 | 89.34 | 1.23 | 1.34 | 1.34 |
| 550.00 | 3.43 | 3.76 | 0.33 | 17.98 | 90.03 | 1.26 | 1.39 | 1.39 |
| 570.00 | 3.36 | 4.01 | 0.66 | 17.04 | 91.03 | 1.31 | 1.44 | 1.46 |
| 580.00 | 3.31 | 4.17 | 0.85 | 16.55 | 91.66 | 1.33 | 1.48 | 1.50 |


1. Total Loss = Insertion Loss + 3dB splitter loss.

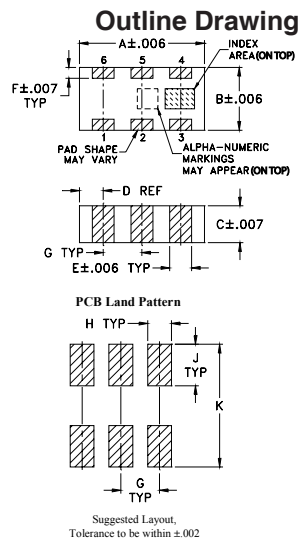

Outline Dimensions (inch/mm)

| A | B | C | D | E | F |
|------|------|------|------|-------|------|
| .126 | .063 | .035 | .024 | .022 | .011 |
| 3.20 | 1.60 | 0.89 | 0.61 | 0.56 | 0.28 |
| G | H | J | K | wt | |
| .039 | .024 | .042 | .123 | grams | |
| 0.99 | 0.61 | 1.07 | 3.12 | .020 | |

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)






NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

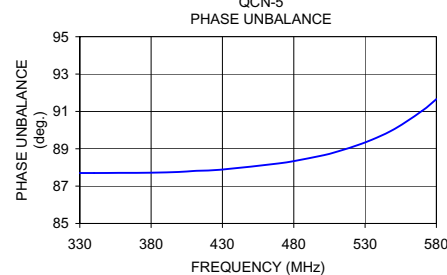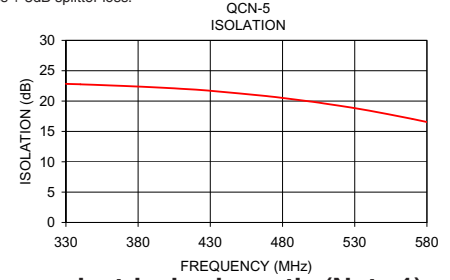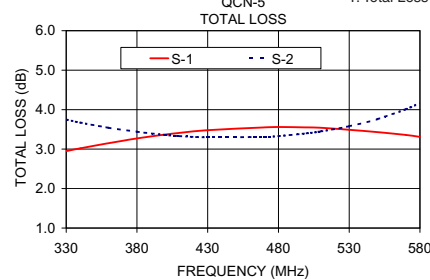

electrical schematic (Note 1)

