

# Bandpass Filter

## RBP-220+

50Ω 212 to 228 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W at 25°C

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


### Outline Drawing

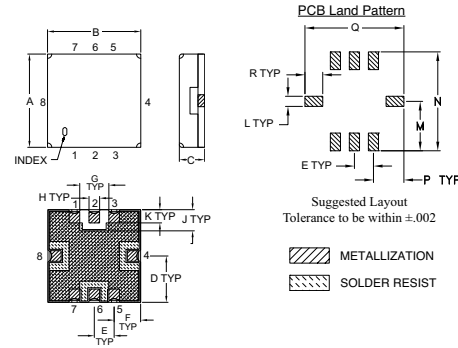

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R	wt.	
.050	.040	.195	.390	.120	.390	.070	grams	
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25	

### Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)

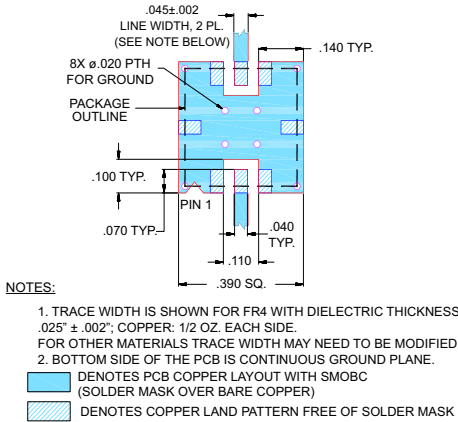


### Features

- Linear Phase, up to ± 8 deg. Typ @ Fc ± 30 MHz
- Good Return Loss, 20 dB Typ @ Pass Band
- Small Size (0.35" X 0.35")

### Applications

- Harmonic Rejection
- Transmitters/Receivers



CASE STYLE: GP731  
PRICE: \$15.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Bandpass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB)	STOPBANDS (MHz)				MAXIMUM DEVIATION FROM LINEAR PHASE (deg.)	VSWR (:1)	
		Loss > 20dB	Loss > 35dB	F3	F4		Passband	Stopband
Fc	F1 - F2	F3	F4	F5	F6	Fc ± 30MHz	Max.	Typ.
220	212 - 228	150	290	100	320-1000	±15	1.7	18

### Typical Frequency Response


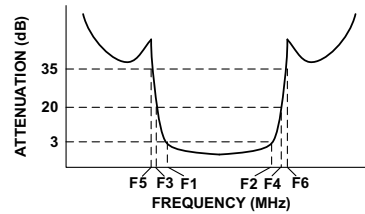


### Functional Schematic

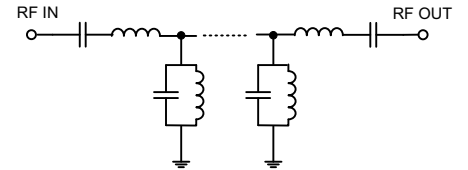

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Deviation from Linear Phase (deg)
0.3	75.19	868.59	190	-0.02
100	41.58	115.81	194	-0.29
150	24.84	28.96	200	-1.06
170	5.75	5.25	204	-1.32
190	3.23	2.78	210	-0.89
212	1.59	1.11	212	-0.57
220	1.59	1.07	214	-0.17
228	1.71	1.27	218	0.71
250	2.80	1.49	222	1.57
260	5.96	3.02	226	2.23
290	25.69	28.49	228	2.45
320	46.31	59.91	230	2.58
370	52.76	96.51	234	2.47
600	55.98	115.81	240	1.05
700	53.93	108.58	246	-3.05
1000	56.30	78.97	250	-8.01

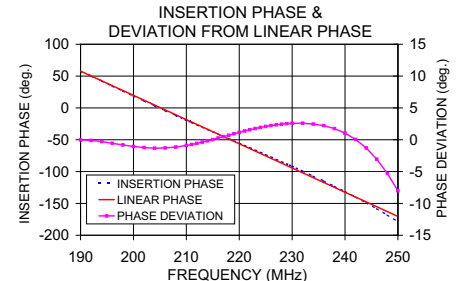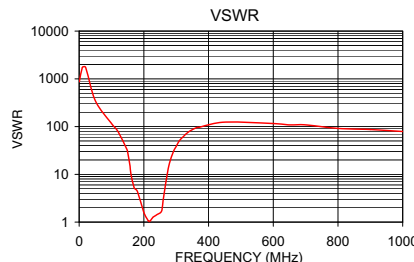

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS