

Bandpass Filter

RBP-220W+

50Ω 190 to 250 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5 W at 25°C

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

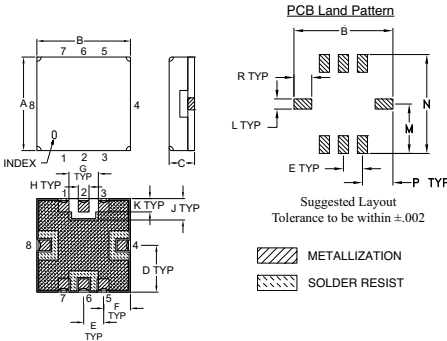

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R	wt. grams	
.050	.040	.195	.390	.120	.390	.070		
1.27	1.02	4.95	9.91	3.05	9.91	1.78		

Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)




NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Linear Phase, up to ± 3 deg. Typ @ Fc ± 30 MHz
- Small Size (0.35" X 0.35")
- Shielded case
- Aqueous washable

Applications

- WCDMA
- GSM
- Harmonic Rejection
- Transmitters/Receivers



CASE STYLE: GP731
 PRICE: \$13.95 QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3.5dB)	STOPBANDS (MHz)				MAXIMUM DEVIATION FROM LINEAR PHASE (deg.)	VSWR (:1)		
		Loss > 20dB		Loss > 30dB			Passband		Stopband
Fc	F1 - F2	F3	F4	F5	F6	Fc ± 30MHz	Typ.	Max.	Typ.
220	190 - 250	80	310	50	330-2000	±6	1.4	1.8	18

Typical Frequency Response



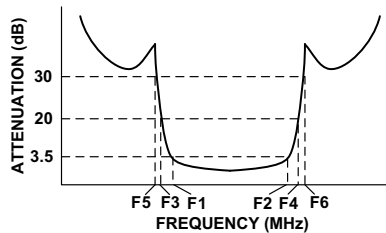


Functional Schematic

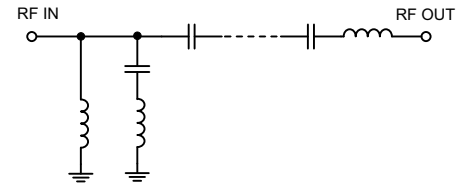

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Deviation from Linear Phase (deg)
1.0	90.42	1506.73	190.0	2.32
50.0	40.56	2348.96	194.0	0.78
80.0	31.28	543.36	198.0	-0.20
156.5	15.58	14.09	202.0	-0.76
163.0	7.51	4.65	204.0	-0.91
169.5	3.07	2.50	210.0	-0.94
190.0	1.29	1.53	214.0	-0.71
210.0	1.02	1.29	218.0	-0.37
220.0	1.08	1.37	220.0	-0.17
230.0	1.19	1.48	222.0	0.03
250.0	1.55	1.55	224.0	0.23
265.0	2.83	2.24	228.0	0.60
275.0	6.33	5.31	230.0	0.75
290.0	14.87	12.19	234.0	0.94
310.0	27.00	31.00	238.0	0.90
330.0	41.63	43.84	242.0	0.49
1000.0	46.35	188.62	246.0	-0.45
2000.0	42.15	88.62	250.0	-2.18

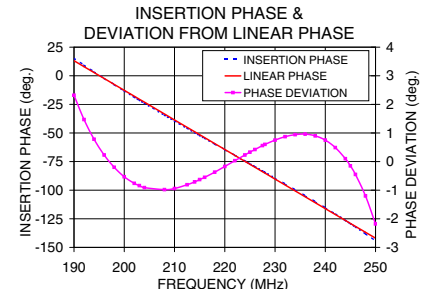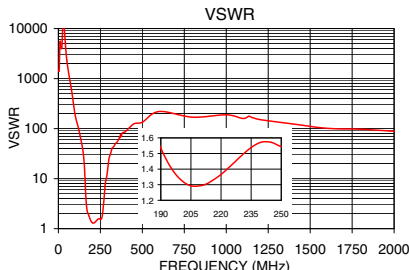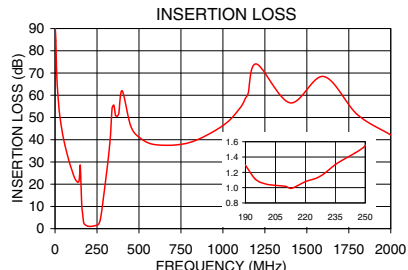

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
 M118418
 EDR-8823AUF1
 RBP-220W+
 URJ/RAV
 080626
 Page 1 of 1