

# High Pass Filter

## RHP-73+

50Ω 140 to 2000 MHz


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W at 25°C

### Pin Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8


### Outline Drawing

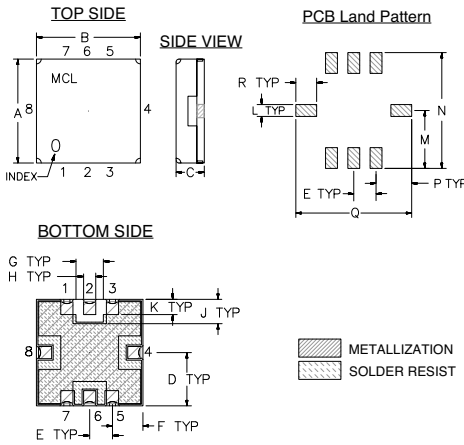

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.090	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.29	1.02	2.03
K	L	M	N	P	Q	R	wt.	
.050	.040	.195	.390	.120	.390	.070	grams	
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25	

Demo Board MCL P/N: TB-332  
Suggested PCB Layout (PL-176)

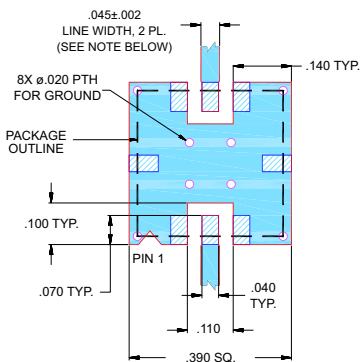

NOTES:  
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025 ± .002"; COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- Low Insertion Loss, 0.3dB Typ @ Passband
- High Rejection
- Shielded case
- Aqueous washable

### Applications

- Transmitters/Receivers
- Sub-Harmonic Rejection
- Military communications



CASE STYLE: GP731  
PRICE: \$13.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### High Pass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

STOPBAND (MHz)		f <sub>co</sub> , MHz Nom.	PASSBAND (MHz)	VSWR (:1)	
(Loss > 40dB)	(Loss > 20dB)	(Loss 3dB)	(Loss < 1dB)	Stopband Typ.	Passband Typ.
DC - 42	DC - 55	73	140 - 2000	18	1.2

### Typical Frequency Response





### Functional Schematic

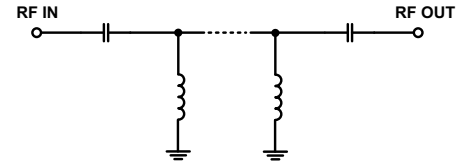

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.5	84.79	2823.13
10.0	84.19	1737.18
20.0	81.19	921.27
30.0	76.77	356.09
42.0	48.28	114.28
55.0	27.25	36.72
62.0	16.65	17.55
69.0	6.80	4.89
73.0	3.19	2.06
85.0	1.27	1.41
110.0	0.65	1.04
140.0	0.47	1.16
250.0	0.24	1.06
750.0	0.22	1.10
500.0	0.21	1.10
1000.0	0.25	1.12
1400.0	0.31	1.18
2000.0	0.41	1.25

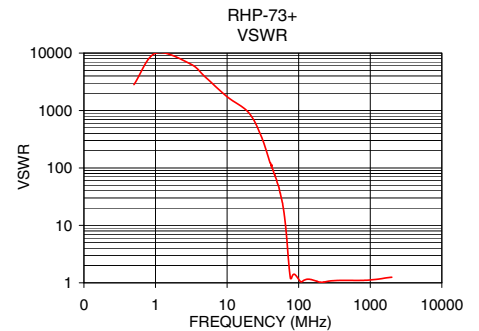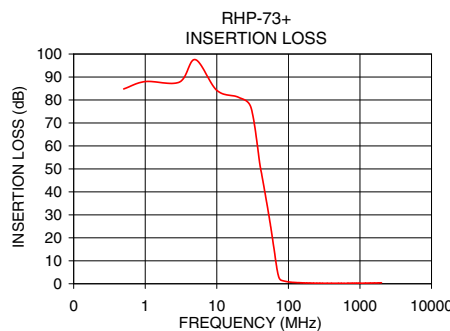

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. OR  
M114872  
EDR-8688U  
RHP-73+  
URJ/RAV  
071204  
Page 1 of 1