

Surface Mount Voltage Controlled Oscillator

ROS-1600W+ ROS-1600W

Wide Band 800 to 1600 MHz

Features

- High Power Output, +9 dBm typ.
- Low Phase Noise
- Low Pushing
- Aqueous washable



CASE STYLE: CK605
PRICE: \$19.95 ea. QTY (5-49)

Applications

- R & D
- Lab
- Instrumentation
- Test Equipment

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER		
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Max.	Vcc (volts)	Current (mA)
ROS-1600W(+)	800	1600	+9	-72	-99	-122	-143	0.5	24	35 - 58	210	90	-90	-22	-15	10	0.3	11.5	35


Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	12V
Absolute Max. Tuning Voltage (Vtune)	24V
All specifications	50 ohm system


Outline Drawing

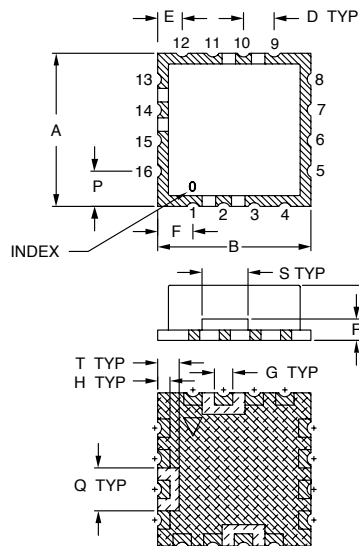

PCB Land Pattern

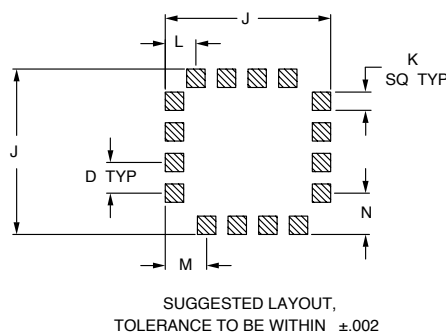

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

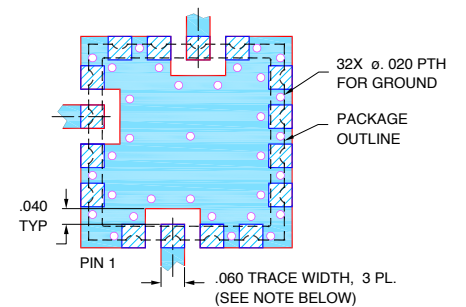

- NOTES:
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com







REV. A
M98898
EDR-5534/2
ROS-1600W
RAV/URJ
080110
Page 1 of 2

Performance Data & Curves*

ROS-1600W+ ROS-1600W

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1200 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	74.62	645.6	627.3	607.1	9.80	9.48	9.27	25.79	-36.7	-26.1	-35.5	0.19	9.36	-70.9	-93.9	-114.2	-134.1	1.0	-70.60
0.50	65.03	681.8	664.6	646.9	9.82	9.44	9.20	25.80	-42.4	-25.9	-35.9	0.24	14.26	-71.2	-95.0	-115.5	-135.5	2.0	-80.36
1.00	57.95	713.0	697.1	680.3	9.72	9.38	9.15	25.82	-37.8	-25.2	-36.2	0.28	9.86	-73.3	-95.6	-116.3	-136.2	3.5	-87.03
2.00	51.19	768.0	752.8	737.4	9.71	9.37	8.92	25.85	-30.7	-24.4	-39.3	0.28	7.48	-73.6	-97.5	-117.7	-138.1	6.0	-92.78
3.00	49.54	818.7	803.6	788.2	9.81	9.32	8.90	25.88	-28.1	-24.4	-44.6	0.31	4.04	-74.0	-98.0	-118.7	-138.5	8.5	-96.22
4.00	48.56	868.3	853.0	837.9	9.85	9.34	8.91	25.92	-26.4	-24.4	-48.5	0.29	8.63	-73.0	-98.8	-119.4	-139.6	10.0	-98.19
5.00	49.33	917.5	901.6	886.4	9.84	9.39	8.88	25.97	-24.2	-24.4	-49.8	0.26	11.82	-75.0	-100.0	-120.2	-140.1	20.8	-105.38
6.00	50.53	967.4	951.1	935.6	10.03	9.43	8.85	26.03	-22.4	-24.4	-48.5	0.25	6.96	-73.7	-100.5	-121.0	-141.3	35.5	-112.36
7.00	53.68	1019.3	1002.3	986.5	10.16	9.46	8.95	26.09	-21.5	-25.8	-46.1	0.26	4.60	-71.8	-98.9	-121.2	-141.6	60.7	-116.90
8.00	56.17	1073.6	1056.0	1039.9	10.03	9.52	8.93	26.17	-21.0	-28.9	-43.2	0.31	11.82	-72.3	-99.5	-122.1	-142.7	86.7	-120.92
10.00	58.16	1188.8	1170.3	1154.1	10.18	9.35	8.82	26.32	-20.7	-34.6	-39.1	0.22	4.90	-69.6	-97.9	-122.2	-143.5	100.0	-122.01
12.00	52.65	1300.1	1282.7	1267.6	9.94	9.07	8.32	26.40	-20.6	-32.4	-38.2	0.16	4.98	-69.3	-97.5	-122.1	-144.2	148.1	-126.40
13.00	49.39	1350.5	1334.4	1320.5	9.77	8.82	8.29	26.40	-21.0	-31.3	-42.1	0.27	4.15	-69.9	-98.1	-122.4	-144.4	211.6	-129.53
15.00	43.16	1443.5	1429.0	1416.2	8.99	8.26	7.55	26.37	-21.4	-30.8	-41.1	0.28	6.53	-71.1	-98.8	-122.9	-145.2	361.5	-134.62
16.00	41.89	1486.4	1472.0	1459.5	8.89	7.96	7.38	26.33	-21.8	-30.5	-43.1	0.25	6.92	-72.2	-98.9	-123.3	-145.3	432.2	-136.57
18.00	37.87	1565.8	1551.9	1539.7	8.21	7.46	6.95	26.26	-22.7	-30.0	-46.7	0.17	6.33	-75.3	-100.1	-123.6	-144.8	507.5	-137.73
19.00	35.22	1602.7	1589.3	1577.1	7.95	7.33	6.71	26.23	-24.3	-29.9	-48.1	0.11	6.85	-72.2	-99.8	-123.2	-145.2	600.0	-139.22
21.00	30.75	1669.7	1656.2	1644.3	7.61	6.79	6.47	26.19	-27.0	-30.0	-47.1	0.04	7.26	-71.6	-99.6	-123.3	-144.6	712.4	-140.72
22.00	29.05	1699.9	1686.7	1674.6	7.27	6.59	6.34	26.16	-28.2	-30.2	-46.4	0.01	8.49	-72.4	-100.3	-123.5	-144.4	851.6	-142.39
24.00	25.85	1754.6	1741.4	1729.6	6.76	6.30	5.75	26.13	-30.2	-32.3	-47.6	0.02	8.26	-74.2	-101.0	-123.5	-144.2	1000.0	-143.61

*at 25°C unless mentioned otherwise

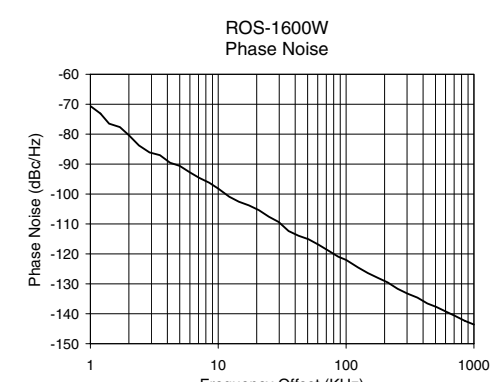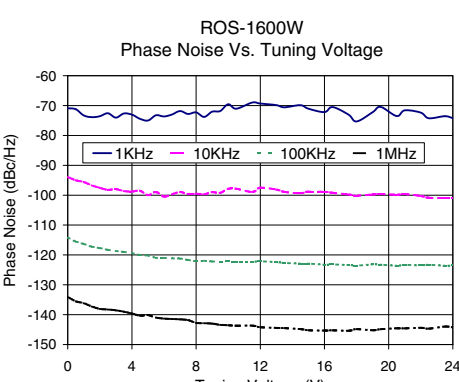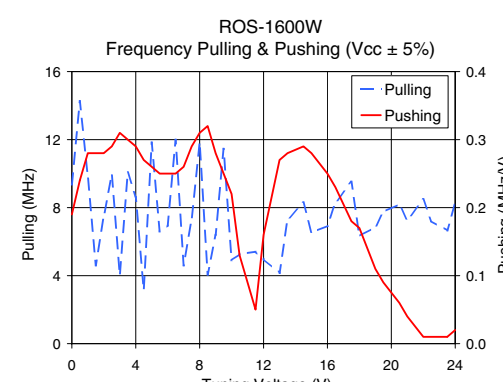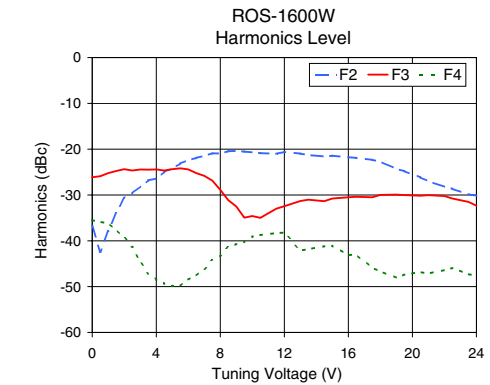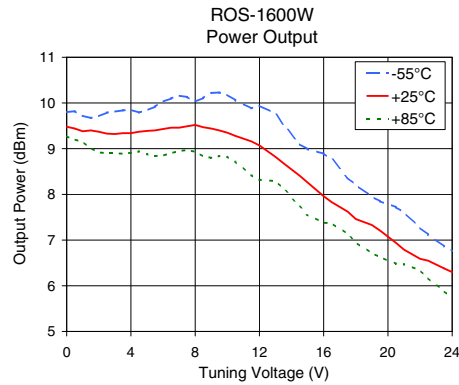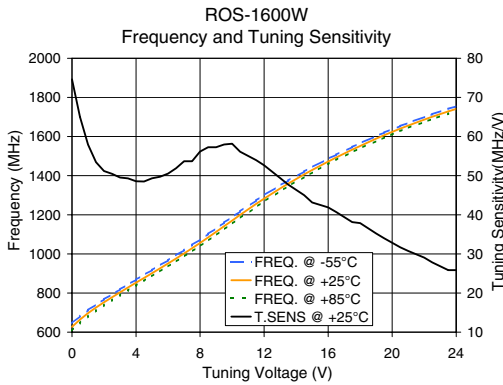

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS