

# Voltage Controlled Oscillator ROS-2600-1119+

50Ω 1650 to 2600 MHz

## The Big Deal:

- Wide Band
- Low Phase Noise
- Robust design and construction
- Small size .500" x .500" x .180"



CASE STYLE: CK605

## Product Overview:

The ROS-2600-1119+ is a Voltage Controlled Oscillator, designed to operate from 1650 to 2600 MHz for Cable TV application. The ROS-2600-1119+ is packaged in a metal case (size of .500" x .500" x .180") to shield against unwanted signals and noise.

## Key Features

Feature	Advantages
Wide Band: from 1650MHz to 2600MHz	The model's wide bandwidth makes it suitable for a wide variety of applications, such as: CATV, military, test equipment etc...
Low Phase Noise: -102dBc/Hz typ at 10kHz offset	Low phase noise improves system EVM (Error Vector Magnitude).
Good Pushing, 1MHz/V typ.	Provides increased immunity against noisy DC lines and improves output frequency stability vs. variations in supply voltage.
Robust design and construction	To enhance the robustness of ROS-2600-1119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer and provides better immunity to microphonic effects and reduced phase hit.
Small size, .500" x .500" x .180"	The small size enables the ROS-2600-1119+ to be used in compact designs.



ISO 9001 ISO 14001 AS 9100 CERTIFIED



Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

Wide Band 1650 to 2600 MHz

### Features

- Wide band frequency range
- Low phase noise
- Low pushing
- Aqueous washable



CASE STYLE: CK605  
PRICE: \$24.95 ea. QTY (5-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

### Applications

- Wireless communications
- Cable TV
- Test Equipment
- Military

### Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Typ.	Typ.
ROS-2600-1119+	1650	2600	+6	-75	-102	-122	-142	0.3	28	25-60	50	30	-90	-18	-	2.5	1	10	53

### Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

### Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	10.5V
Absolute Max. Tuning Voltage (Vtune)	30.0V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

### Outline Drawing

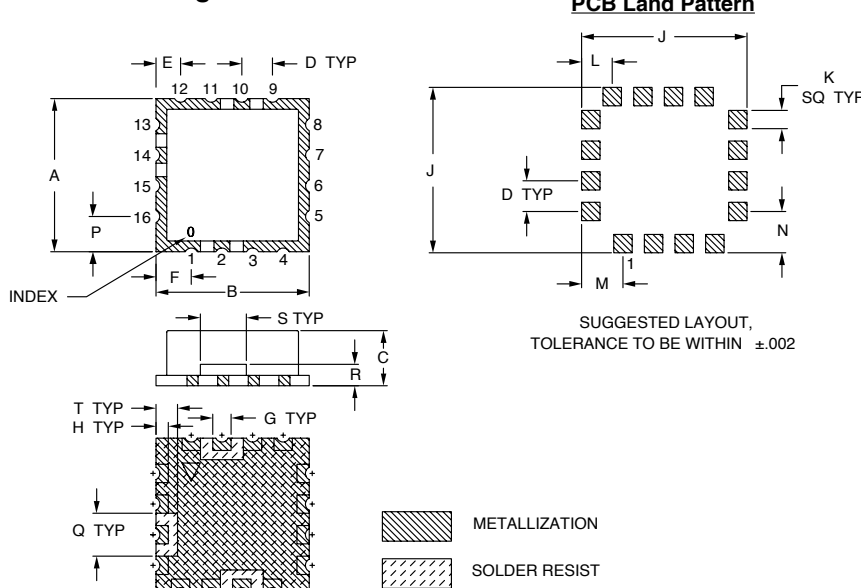

### Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

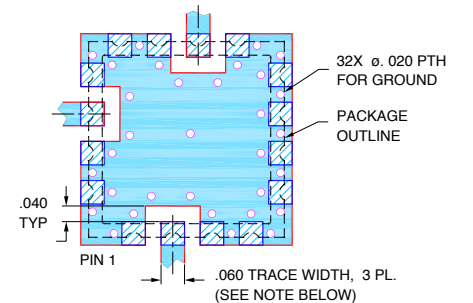

- NOTES:**
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
    - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
    - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. OR  
M128690  
EDR-9315F1  
ROS-2600-1119+  
RAV  
101216  
Page 2 of 3

# Performance Data & Curves\*

# ROS-2600-1119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 2125 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	62.08	1593.1	1585.0	1570.1	7.78	7.66	6.37	44.67	-15.9	-29.6	-34.8	0.98	1.48	-76.4	-100.5	-120.9	-140.8	1.0	-76.96
0.30	59.38	1623.8	1616.1	1602.4	7.69	7.52	6.22	44.69	-15.9	-30.1	-35.5	1.01	1.44	-75.9	-100.8	-121.2	-141.1	2.1	-84.94
2.00	56.27	1711.2	1703.8	1691.7	7.43	7.23	5.98	44.78	-16.1	-31.3	-37.4	1.08	0.76	-74.2	-102.4	-122.0	-142.0	3.5	-92.21
3.00	56.84	1767.6	1760.1	1748.2	7.28	7.05	5.83	44.82	-15.8	-32.3	-41.2	1.12	0.76	-73.3	-101.6	-122.2	-142.2	6.1	-97.88
5.00	56.68	1881.1	1873.7	1861.9	7.01	6.82	5.73	44.98	-16.2	-34.8	-35.6	1.26	1.64	-77.7	-102.6	-123.1	-143.2	8.7	-101.25
7.00	57.09	1995.1	1987.6	1975.9	6.59	6.51	5.59	45.13	-16.4	-32.1	-33.2	1.28	1.33	-78.3	-102.8	-123.8	-143.8	10.0	-102.49
8.00	57.35	2052.5	2044.6	2033.3	6.58	6.40	5.52	45.18	-17.2	-30.7	-29.5	1.27	2.01	-78.2	-103.2	-124.0	-144.1	21.1	-109.87
10.00	54.64	2166.0	2158.5	2147.0	6.34	6.13	5.50	45.32	-17.3	-30.2	-34.7	1.24	0.49	-78.7	-103.1	-124.6	-144.6	36.1	-114.63
11.00	53.58	2220.9	2213.1	2202.3	6.33	6.21	5.43	45.36	-18.5	-31.5	-33.4	1.10	1.86	-78.1	-103.4	-124.6	-144.7	61.6	-119.43
12.00	50.51	2274.3	2266.7	2255.8	6.04	6.09	5.18	45.40	-18.5	-29.6	-34.8	0.99	2.07	-77.1	-103.3	-124.8	-144.9	86.4	-122.59
13.00	47.25	2324.3	2317.2	2305.8	6.01	5.95	5.36	45.42	-20.5	-31.0	-32.4	0.86	1.50	-76.8	-103.2	-124.8	-145.1	100.0	-123.79
14.00	43.70	2371.2	2364.5	2353.2	5.98	5.82	5.29	45.39	-19.7	-34.5	-34.4	0.70	2.35	-75.1	-102.5	-124.5	-144.8	145.0	-127.09
16.00	39.13	2456.4	2449.1	2438.2	5.71	5.86	5.25	45.33	-20.3	-29.9	-41.2	0.49	2.31	-77.2	-102.3	-124.3	-144.6	170.2	-128.54
18.00	34.80	2530.5	2522.9	2511.4	5.61	5.83	5.29	45.24	-20.4	-29.3	-44.1	0.44	3.01	-75.8	-101.8	-123.4	-143.8	203.5	-129.97
20.00	28.63	2594.0	2587.1	2574.8	5.65	5.58	5.25	45.16	-21.4	-27.2	-45.7	0.41	3.07	-77.0	-101.6	-123.8	-144.3	285.6	-133.06
22.00	23.82	2648.7	2642.7	2629.5	5.59	5.28	4.98	45.04	-22.0	-25.4	-43.0	0.35	2.25	-76.4	-101.8	-123.2	-143.6	335.4	-134.52
24.00	19.47	2694.6	2688.9	2675.3	5.71	5.22	4.93	44.94	-23.3	-24.3	-42.1	0.26	2.31	-75.7	-101.5	-122.9	-143.2	470.7	-137.38
25.00	18.14	2715.8	2708.4	2694.7	5.36	5.25	5.01	44.91	-23.9	-23.5	-42.8	0.21	1.44	-76.0	-100.7	-122.7	-143.0	562.6	-138.97
27.00	13.26	2748.9	2743.3	2729.2	5.29	4.75	4.42	44.82	-24.8	-25.2	-40.5	0.23	2.96	-76.1	-101.0	-122.1	-142.2	927.2	-143.03
28.00	11.16	2762.6	2756.6	2742.1	5.35	4.66	4.50	44.83	-24.4	-23.8	-43.0	0.24	2.99	-78.2	-101.8	-123.3	-143.5	1000.0	-143.70

\*at 25°C unless mentioned otherwise

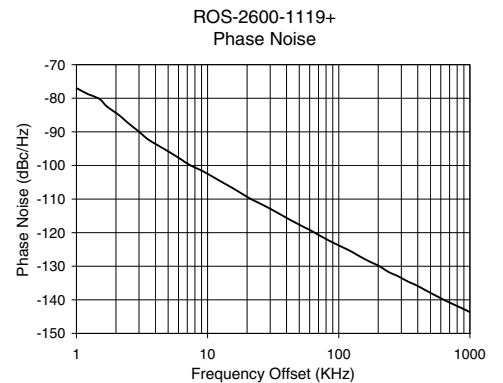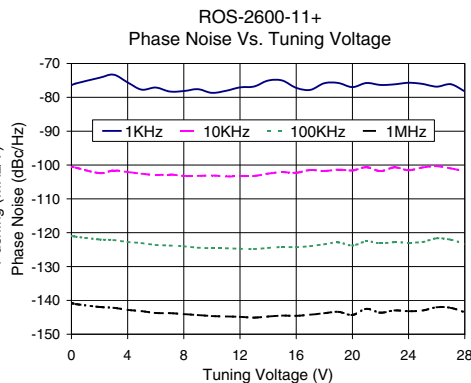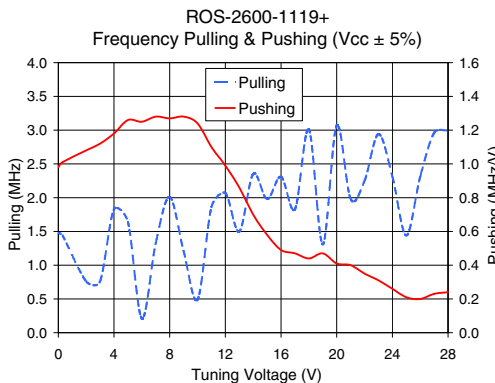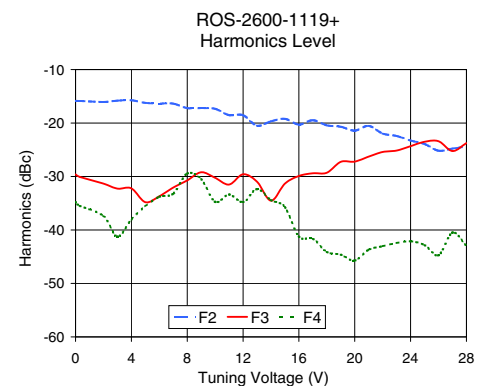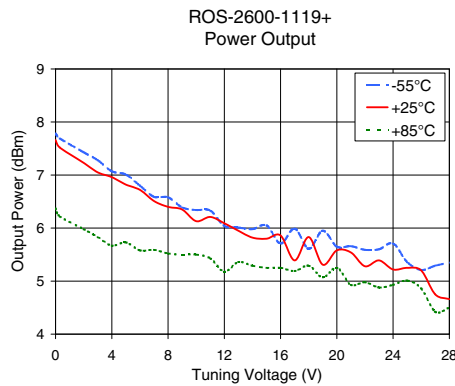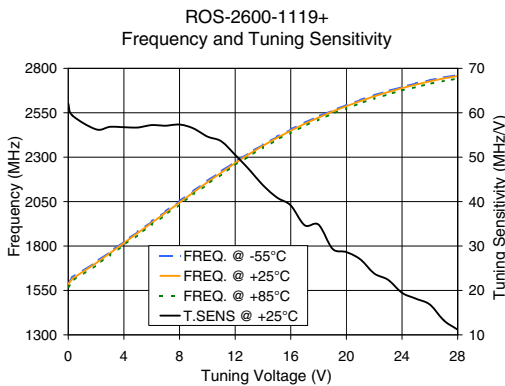

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).