

# Power Splitter/Combiners

2 Way-0° 50Ω

200 to 2000 MHz

SBTC-2-20+

SBTC-2-20L+



No Leads

CASE STYLE:AT790

PRICE: \$3.49 ea. QTY (25)

\$2.69 ea. QTY (1000)



Leads

CASE STYLE:AT1029

PRICE: \$3.64 ea. QTY (25)

\$2.84 ea. QTY (1000)

## Maximum Ratings


|                             |                |
|-----------------------------|----------------|
| Operating Temperature       | -40°C to 85°C  |
| Storage Temperature         | -55°C to 100°C |
| Power Input (as a splitter) | 0.5W max.      |
| Internal Dissipation        | 0.125W max.    |

## Pin Connections


|          |     |
|----------|-----|
| SUM PORT | 6   |
| PORT 1   | 3   |
| PORT 2   | 4   |
| GROUND   | 1,2 |
| NOT USED | 5   |

## Outline Drawing / Dimensions (inch/mm)


### AT790 (SBTC-2-20+)

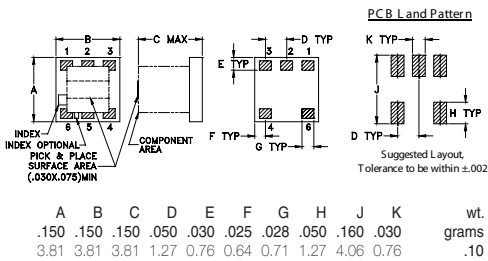

### AT1029 (SBTC-2-20L+)

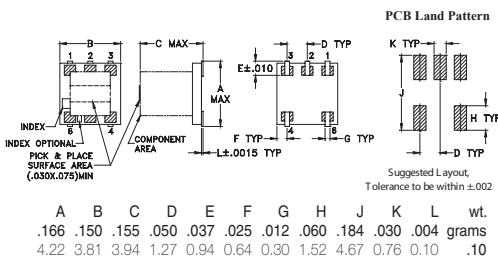

## Demo Board MCL P/N: TB-274 Suggested PCB Layout (PL-152)

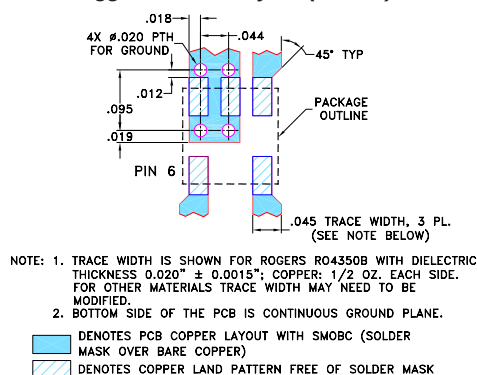

## Features

- wide band frequency, 200-2000 MHz
- excellent amplitude unbalance, 0.2 dB typ.
- small size, 0.166"x0.15"x0.155"
- temperature stable LTCC base
- small size
- low cost
- aqueous washable
- protected by US patent 6,963,255

## Applications




- cellular/GSM
- UHF/VHF receivers/transmitters
- PCN/PCS
- GPS
- VSAT

## Electrical Specifications

| FREQ. RANGE (MHz) | ISOLATION (dB) | INSERTION LOSS (dB) ABOVE 3.0 dB | PHASE UNBALANCE (Degrees) Max. | AMPLITUDE UNBALANCE (dB) Max. |
|-------------------|----------------|----------------------------------|--------------------------------|-------------------------------|
| $f_L - f_U$       | Typ. Min.      | Typ. Max.                        |                                |                               |
| 200-2000          | 20 14          | 0.8 2.2                          | 10                             | 0.8                           |
| 800-1000          | 22 16          | 0.5 0.9                          | 3                              | 0.5                           |
| 500-1500          | 22 15          | 0.5 1.5                          | 5                              | 0.7                           |
| 1800-2000         | 20 15          | 1.2 2.2                          | 10                             | 0.6                           |

## Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) S-1 | Insertion Loss (dB) S-2 | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|-------------------------|-------------------------|--------------------------|----------------|------------------------|--------|--------|--------|
| 200.00          | 3.56                    | 3.30                    | 0.26                     | 26.85          | 1.44                   | 1.38   | 1.58   | 1.50   |
| 300.00          | 3.57                    | 3.36                    | 0.21                     | 39.72          | 0.88                   | 1.37   | 1.44   | 1.40   |
| 400.00          | 3.55                    | 3.38                    | 0.17                     | 32.31          | 0.56                   | 1.38   | 1.35   | 1.33   |
| 500.00          | 3.58                    | 3.45                    | 0.13                     | 27.04          | 0.36                   | 1.37   | 1.29   | 1.28   |
| 600.00          | 3.62                    | 3.52                    | 0.10                     | 23.52          | 0.22                   | 1.40   | 1.25   | 1.25   |
| 800.00          | 3.58                    | 3.56                    | 0.03                     | 20.65          | 0.20                   | 1.39   | 1.17   | 1.16   |
| 1000.00         | 3.61                    | 3.68                    | 0.07                     | 19.36          | 0.41                   | 1.37   | 1.12   | 1.08   |
| 1200.00         | 3.69                    | 3.84                    | 0.15                     | 19.24          | 0.93                   | 1.34   | 1.14   | 1.04   |
| 1400.00         | 3.76                    | 3.98                    | 0.22                     | 20.40          | 1.78                   | 1.30   | 1.23   | 1.13   |
| 1500.00         | 3.84                    | 4.07                    | 0.23                     | 21.76          | 2.34                   | 1.29   | 1.29   | 1.18   |
| 1600.00         | 3.92                    | 4.16                    | 0.24                     | 24.12          | 2.94                   | 1.28   | 1.35   | 1.23   |
| 1700.00         | 4.02                    | 4.25                    | 0.24                     | 28.51          | 3.61                   | 1.27   | 1.40   | 1.29   |
| 1800.00         | 4.15                    | 4.36                    | 0.21                     | 31.25          | 4.31                   | 1.27   | 1.45   | 1.34   |
| 1900.00         | 4.33                    | 4.49                    | 0.18                     | 26.03          | 4.98                   | 1.32   | 1.49   | 1.38   |
| 2000.00         | 4.57                    | 4.66                    | 0.16                     | 20.75          | 5.63                   | 1.40   | 1.51   | 1.42   |

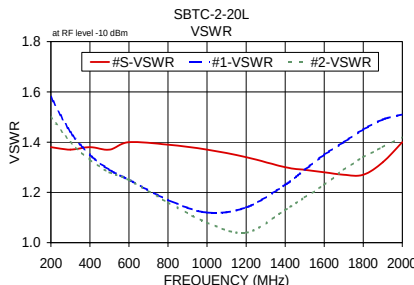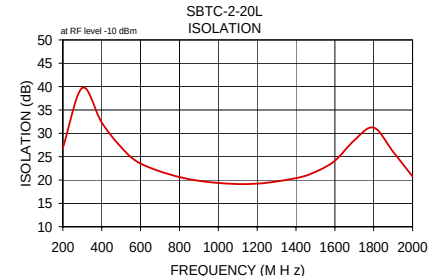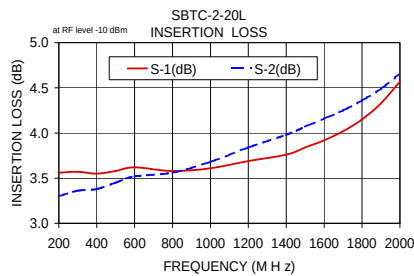

## electrical schematic



**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

For detailed performance specs  
& shopping online see web site

REV E  
M111888  
SBTC-2-20+ ED-8868  
SBTC-2-20L+ ED-10035A/2  
VWZ/DP  
100520