

Surface Mount Low Pass Filter

SCLF-25+ SCLF-25

50Ω DC to 25 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Outline Drawing

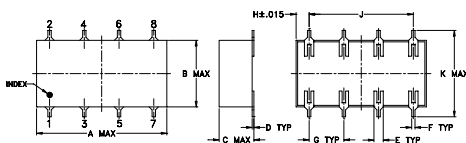

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

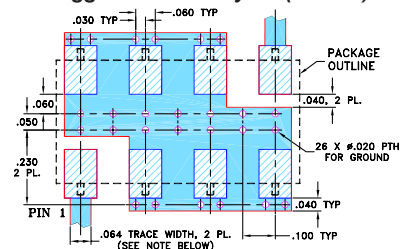

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide selection of cut-off frequencies
- excellent rejection
- custom models available

Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs



CASE STYLE: YY161
PRICE: \$11.45 ea. QTY (1-9)


+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco, (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Pass band Typ.	Stop band Typ.
DC-25	28	36-47	47-200	1.7	18

typical frequency response





Electrical Schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
1.00	0.10	0.00	32.60	1.00	32.00
4.40	0.10	0.00	23.50	1.20	32.90
7.80	0.10	0.00	30.40	1.30	32.10
11.10	0.20	0.00	22.30	1.50	31.10
14.50	0.30	0.10	15.50	1.80	33.20
17.90	0.40	0.10	17.90	2.00	32.60
21.30	0.40	0.00	22.10	2.30	32.80
25.00	0.70	0.10	24.60	2.60	32.80
28.00	5.10	0.50	3.00	3.00	32.40
31.00	15.40	1.00	0.60	3.40	32.60
32.00	18.60	1.00	0.40	3.90	33.00
33.00	21.60	1.00	0.40	4.50	33.10
34.00	24.40	1.00	0.30	5.10	33.20
35.00	27.00	1.00	0.30	5.90	33.60
36.00	29.50	1.00	0.20	6.70	33.60
37.00	31.80	1.00	0.20	7.70	34.00
39.00	36.20	1.00	0.20	8.80	34.50
41.00	40.20	0.90	0.20	10.10	35.10
43.00	43.80	0.90	0.20	11.40	35.50
45.00	47.20	0.90	0.10	13.10	36.30
47.00	50.40	0.80	0.10	15.00	37.10
49.00	53.50	0.90	0.10	17.20	39.70
67.90	73.00	1.10	0.10	19.60	44.10
86.80	78.20	2.50	0.10	22.50	50.80
105.60	78.90	2.40	0.10	25.00	68.10
124.50	77.90	2.40	0.10	28.00	74.60
143.40	75.80	0.90	0.10	33.50	20.00
162.30	75.30	1.00	7.00	36.00	13.80
181.10	73.90	0.60	0.10	47.00	5.30
200.00	72.80	0.70	0.10	50.20	5.20

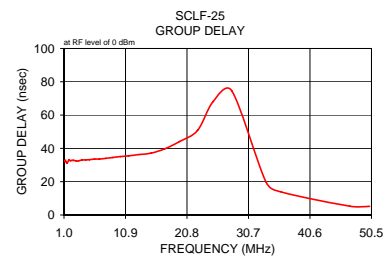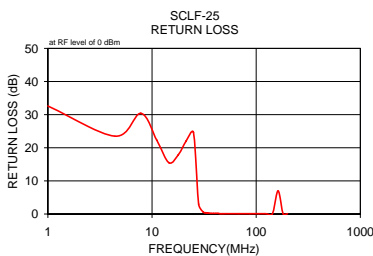

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M111708
SCLF-25
070716