

# Surface Mount Low Pass Filter

# SCLF-45+ SCLF-45

50Ω DC to 45 MHz

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

## Outline Drawing



## PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±0.02

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

## Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

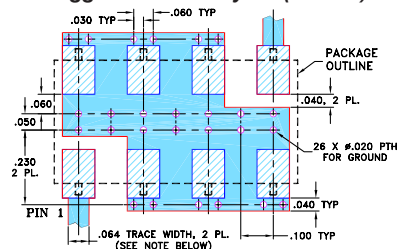

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wide selection of cut-off frequencies
- excellent rejection
- custom models available

## Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs



CASE STYLE: YY161  
PRICE: \$11.45 ea. QTY (1-9)


+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


## Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco, (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Pass band Typ.	Stop band Typ.
DC-45 (loss < 1 dB)	55 (loss 3 dB)	70-90 (loss > 20 dB)	90-200 (loss > 40 dB)	1.7	18

## typical frequency response






## Electrical Schematic



## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	$\sigma$			
1.00	0.03	0.00	38.40	1.00	16.00
10.00	0.12	0.10	20.70	10.00	15.85
16.50	0.18	0.10	17.10	16.50	16.14
24.00	0.30	0.10	15.20	24.00	16.72
31.50	0.31	0.10	16.80	31.50	18.50
39.50	0.31	0.10	25.90	39.50	21.04
45.00	0.49	0.10	24.40	45.00	26.38
52.00	1.22	0.20	9.90	48.00	27.16
55.00	3.37	0.60	3.80	50.00	31.44
58.00	7.23	0.80	1.30	52.00	34.88
61.00	11.68	0.90	0.40	54.00	36.74
64.00	15.98	0.90	0.10	55.00	35.95
66.00	18.68	0.80	0.10	58.00	27.09
68.00	21.26	0.80	0.20	60.00	21.94
70.00	23.69	0.80	0.30	61.00	20.02
72.00	26.02	0.80	0.30	63.00	15.60
76.00	30.42	0.80	0.40	64.00	14.21
80.00	34.44	0.80	0.40	66.00	11.74
85.00	39.13	0.70	0.50	68.00	10.93
87.00	41.06	0.80	0.50	70.00	9.31
90.00	43.71	0.90	0.50	72.00	7.86
100.00	51.96	1.50	0.50	74.00	6.26
135.00	75.54	9.90	0.50	76.00	7.02
150.00	72.20	4.30	0.40	78.00	7.76
161.50	72.82	3.90	0.40	80.00	5.54
170.00	67.46	2.80	0.40	85.00	2.62
177.00	70.41	5.00	0.40	87.00	2.41
184.50	73.51	4.80	0.30	90.00	2.38
192.50	70.37	4.70	0.30	100.00	2.04
200.00	70.36	5.50	0.30	131.00	1.81

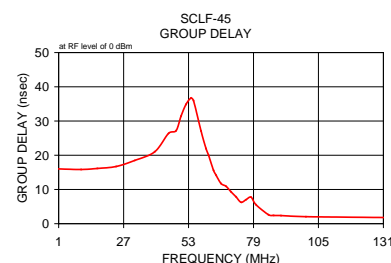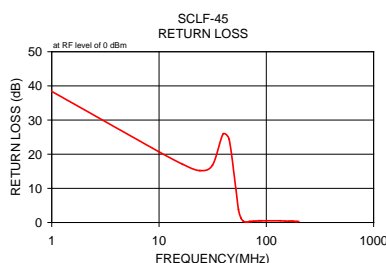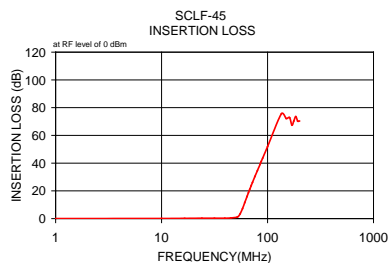

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. D  
M111708  
SCLF-45  
070716