

Ultra-Small Ceramic Power Splitter/Combiner

SCN-3-16+ SCN-3-16

3 Way-0° 50Ω 950 to 1600 MHz



CASE STYLE: FV1206-1
PRICE: \$3.95 ea. QTY. (10-49)
\$3.60 ea. QTY. (100)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 6W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3	resistor external 124 ohms
PORT 1-3	resistor external 127 ohms

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.126	.063	.035	.024	.022	.011	
3.20	1.60	0.89	0.61	0.56	0.28	
G	H	J	K			wt
.039	.024	.042	.123			grams
0.99	0.61	1.07	3.12			.020

Demo Board MCL P/N: TB-303 Suggested PCB Layout (PL-171)

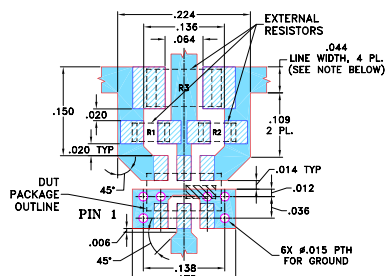

RESISTORS: R1-R2: 124 Ohm, 0603 SIZE; R3: 127 Ohm, 1206 SIZE.

- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS: .020 ±.0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - RESISTOR LAND PATTERNS ARE SHOWN AS PER IPC-SM-782A.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- isolation resistors, external
- low insertion loss, 0.6 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- very good phase unbalance, 3 deg. typ.
- high isolation, 15 dB typ.
- excellent power handling, 15W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around, terminations for excellent solderability
- low cost

Applications




- DSS
- WLAN
- satellite communication
- line of sight communications
- GSM, GPS
- ISM applications
- defense applications

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
f_c-f_u										
950-1600	15	11	0.6	1.2	3.0	5.0	0.2	0.5	14	20
1200-1400	20	14	0.3	0.8	2.0	5.0	0.2	0.4	17	19

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
950.00	5.42	5.34	5.42	0.08	14.93	13.32	15.30	1.94	11.10	21.04	19.70
1000.00	5.37	5.29	5.37	0.08	15.99	13.99	16.38	2.02	11.91	21.04	20.18
1050.00	5.32	5.24	5.32	0.08	17.23	14.75	17.66	2.12	12.81	20.79	20.41
1100.00	5.28	5.19	5.28	0.09	18.74	15.64	19.23	2.21	13.90	20.24	20.37
1150.00	5.24	5.15	5.24	0.09	20.65	16.70	21.23	2.32	15.20	19.62	19.96
1200.00	5.21	5.12	5.22	0.09	23.15	17.95	23.86	2.42	16.68	19.07	19.59
1250.00	5.19	5.11	5.20	0.10	26.68	19.50	27.55	2.53	18.37	18.56	19.14
1300.00	5.19	5.10	5.20	0.10	31.40	21.43	31.87	2.61	19.89	18.26	18.75
1350.00	5.20	5.11	5.22	0.11	31.35	23.85	30.21	2.66	20.36	18.11	18.57
1400.00	5.23	5.14	5.25	0.11	26.27	26.57	25.45	2.77	19.18	18.14	18.49
1450.00	5.29	5.19	5.31	0.11	22.42	27.77	21.90	2.89	17.07	18.44	18.78
1500.00	5.37	5.28	5.40	0.12	19.61	25.76	19.26	2.91	14.81	19.03	19.18
1550.00	5.48	5.40	5.52	0.12	17.45	22.72	17.20	2.94	12.80	20.12	20.07
1600.00	5.64	5.56	5.68	0.12	15.72	20.10	15.54	2.99	11.01	21.67	21.69

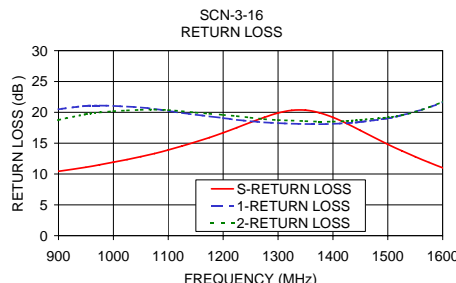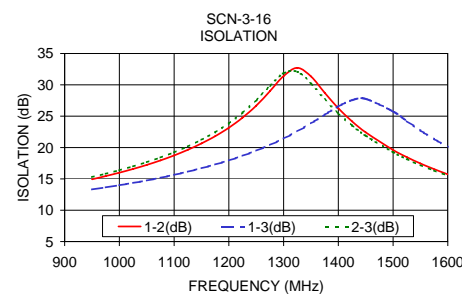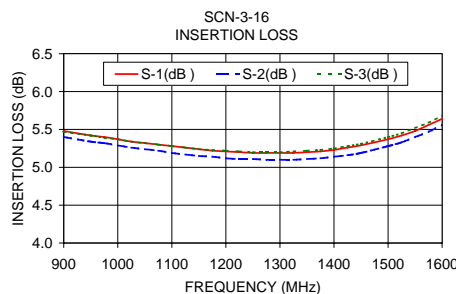

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M123210
ED-11736/3
SCN-3-16
AD/DJ/CP/AM
090826