

Power Splitter/Combiner

SCP-5-1+ SCP-5-1

5 Way-0° 50Ω

2 to 200 MHz



CASE STYLE: YY161
PRICE: \$21.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.625W max.
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

SUM PORT	1
PORT 1	6
PORT 2	8
PORT 3	7
PORT 4	5
PORT 5	3
GROUND	2,4

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-213 Suggested PCB Layout (PL-104)

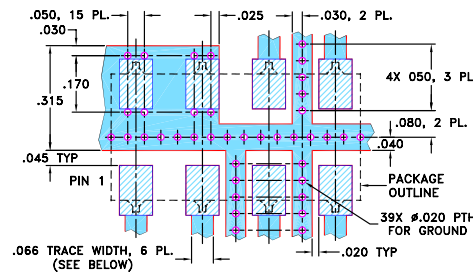

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .030 ± .002, COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.3 dB typ.
- high isolation 29 dB typ.
- excellent amplitude unbalance, 0.3 dB typ.

Applications

- VHF
- instrumentation
- receivers/transmitters




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 7.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
f_L - f_U	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.						
2-200	30	20	29	20	30	20	0.2	0.5	0.3	0.75	0.6	1.5	1	3	5	0.2	0.3	0.6

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)					Amp. Unbal. (dB)	Isolation (dB)				Phase Unbal. (deg.)	VSWR S	VSWR OUTPUTS
	S-1	S-2	S-3	S-4	S-5		1-2	2-3	2-4	3-5			
2.00	7.18	7.17	7.17	7.17	7.17	0.01	47.70	45.82	27.74	27.47	0.04	1.10	1.18
6.00	7.17	7.15	7.16	7.16	7.16	0.02	45.13	44.43	30.00	29.83	0.09	1.09	1.12
12.00	7.18	7.17	7.18	7.17	7.18	0.01	43.80	43.17	30.31	30.22	0.19	1.08	1.10
18.00	7.20	7.19	7.19	7.19	7.19	0.01	42.81	42.17	30.23	30.17	0.27	1.08	1.10
30.00	7.22	7.21	7.21	7.21	7.22	0.01	41.21	40.49	29.90	29.95	0.46	1.07	1.10
45.00	7.26	7.24	7.23	7.24	7.25	0.02	39.48	38.73	29.59	29.68	0.60	1.06	1.10
60.00	7.28	7.26	7.26	7.26	7.27	0.02	38.25	37.46	29.48	29.63	0.88	1.06	1.11
75.00	7.31	7.29	7.28	7.30	7.31	0.03	37.24	36.46	29.46	29.68	1.03	1.06	1.11
90.00	7.34	7.31	7.31	7.32	7.35	0.04	36.45	35.56	29.57	29.88	1.23	1.06	1.11
105.00	7.36	7.33	7.33	7.34	7.38	0.05	35.72	34.77	29.72	30.22	1.45	1.07	1.11
120.00	7.40	7.36	7.37	7.37	7.42	0.05	34.94	33.93	30.03	30.72	1.58	1.09	1.11
135.00	7.44	7.40	7.40	7.41	7.47	0.07	34.07	32.98	30.42	31.40	1.76	1.12	1.12
160.00	7.52	7.47	7.46	7.48	7.57	0.11	32.14	31.04	31.11	32.92	2.04	1.19	1.12
180.00	7.62	7.55	7.55	7.58	7.68	0.13	30.17	29.10	31.10	33.81	2.35	1.28	1.13
200.00	7.76	7.67	7.67	7.70	7.83	0.16	27.91	26.91	29.96	32.90	2.63	1.40	1.14

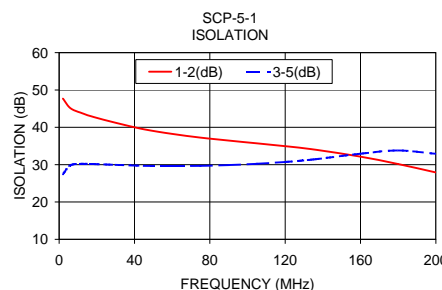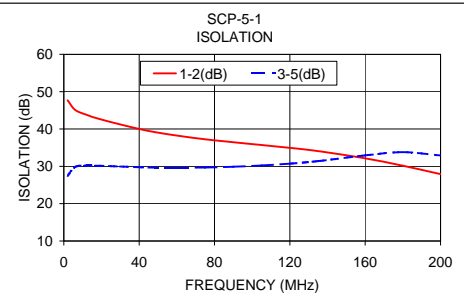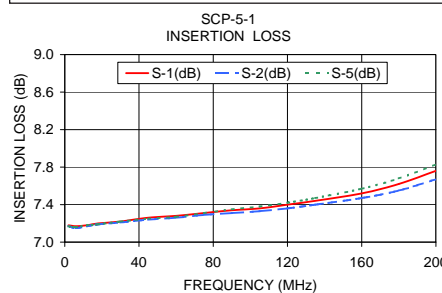

electrical schematic



For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M102713
SCP-5-1
HY/TD/CP
090827