

SMA/BNC

Adaptenuator

SM-BM-10

50Ω 0.5W 10dB DC to 2000 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 150°C

Features

- improved interface matching
- wideband, DC to 2000 MHz, useable to 4000 MHz
- excellent VSWR, 1.1:1 typ.
- excellent flatness, ±0.1dB typ.
- rugged unibody construction


CASE STYLE: DJ869

Connectors	Model	Price	Qty.
Conn1 SMA-Male	Conn2 BNC-Male	SM-BM-10	\$19.95 ea. (1-24)

Applications

- instrumentation
- provides attenuation and connector type change
- minimizes hardware

Outline Drawing

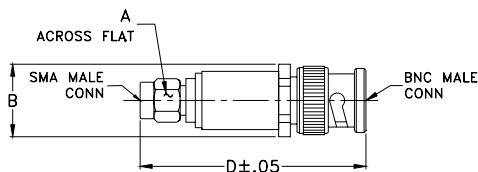

Electrical Specifications

FREQ. (MHz)	ATTENUATION (dB)						VSWR (:1)						MAX. INPUT POWER (W)	
	Flatness*													
	DC-500 MHz		DC-1000 MHz		DC-2000 MHz		DC-500 MHz		DC-1000 MHz		DC-2000 MHz			
f_L-f_U	Nom.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
DC-2000	10±0.3	0.05	0.10	0.10	0.15	0.10	0.20	1.1	1.2	1.1	1.3	1.2	1.25	0.5

*Flatness defined as peak to peak attenuation over band divided by 2.




Typical Performance Data

FREQUENCY (MHz)	ATTENUATION (dB)	VSWR (:1)	
		BNC-Male	SMA-Male
1.00	10.02	1.00	1.00
5.00	10.02	1.00	1.00
10.00	9.99	1.00	1.00
50.00	10.03	1.00	1.00
100.00	10.00	1.00	1.00
500.00	10.07	1.01	1.01
1000.00	10.09	1.02	1.02
1500.00	10.10	1.05	1.03
1700.00	10.09	1.06	1.03
2000.00	10.08	1.07	1.06

Outline Dimensions (inch/mm)

A	B	D	wt
.312	.61	1.89	grams
7.92	15.49	48.01	25.8

Electrical Schematic

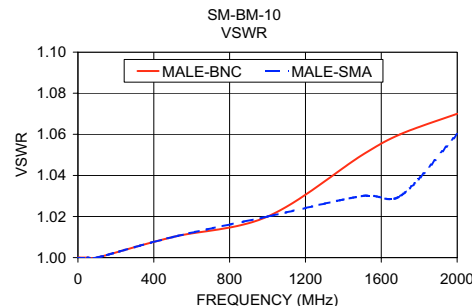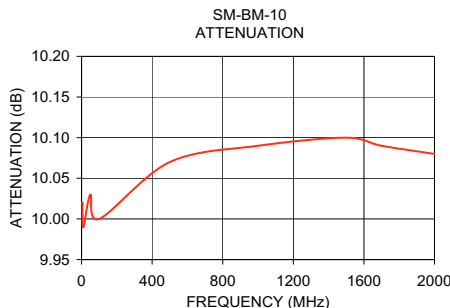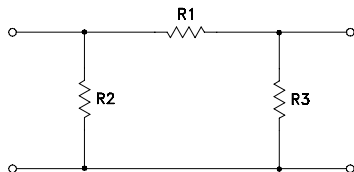

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M96826
EE-9890
SM-BM-10
UR/JTD/CP/AM
070117