

SMA/BNC

Adaptenuator

50Ω 0.5W 3dB DC to 2000 MHz

SM-BM-3



Maximum Ratings

| | |
|---|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 150°C |
| Permanent damage may occur if any of these limits are exceeded. | |

Features

- improved interface matching
- wideband, DC to 2000 MHz, useable to 4000 MHz
- excellent VSWR, 1.1:1 typ.
- excellent flatness, ±0.1dB typ.
- rugged unibody construction


CASE STYLE: DJ869

| Connectors | Model | Price | Qty. |
|-------------------|-------------------|---------|--------------------|
| Conn1 SMA-Male | Conn2 BNC-Male | SM-BM-3 | \$19.95 ea. (1-24) |

Applications

- instrumentation
- provides attenuation and connector type change
- minimizes hardware

Outline Drawing

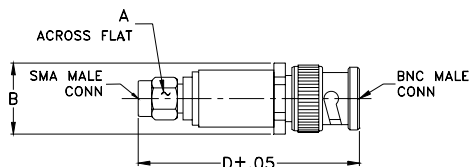

Electrical Specifications

| FREQ. (MHz) | ATTENUATION (dB) | | | | | | VSWR (:1) | | | | | | MAX. INPUT POWER (W) | |
|----------------|------------------|------|----------------|------|----------------|------|---------------|------|----------------|------|----------------|------|-------------------------------|-----|
| | Flatness* | | | | | | | | | | | | | |
| | DC-500 MHz | | DC-1000 MHz | | DC-2000 MHz | | DC-500 MHz | | DC-1000 MHz | | DC-2000 MHz | | | |
| f_L-f_U | Nom. | Typ. | Max. | Typ. | Max. | Typ. | Max. | Typ. | Max. | Typ. | Max. | Typ. | Max. | |
| DC-2000 | 3±0.3 | 0.05 | 0.15 | 0.10 | 0.20 | 0.15 | 0.25 | 1.1 | 1.2 | 1.1 | 1.2 | 1.2 | 1.25 | 0.5 |

*Flatness defined as peak to peak attenuation over band divided by 2.




Typical Performance Data

| FREQUENCY (MHz) | ATTENUATION (dB) | VSWR (:1) | |
|--------------------|---------------------|--------------|----------|
| | | BNC-Male | SMA-Male |
| 1.00 | 2.99 | 1.00 | 1.00 |
| 5.00 | 2.99 | 1.00 | 1.00 |
| 10.00 | 3.00 | 1.00 | 1.00 |
| 50.00 | 3.01 | 1.01 | 1.01 |
| 100.00 | 3.02 | 1.01 | 1.01 |
| 500.00 | 3.07 | 1.04 | 1.04 |
| 1000.00 | 3.14 | 1.07 | 1.07 |
| 1500.00 | 3.20 | 1.09 | 1.09 |
| 1700.00 | 3.24 | 1.08 | 1.09 |
| 2000.00 | 3.26 | 1.05 | 1.08 |

Outline Dimensions (inch/mm)

| A | B | D | wt |
|------|-------|-------|-------|
| .312 | .61 | 1.89 | grams |
| 7.92 | 15.49 | 48.01 | 25.8 |

Electrical Schematic

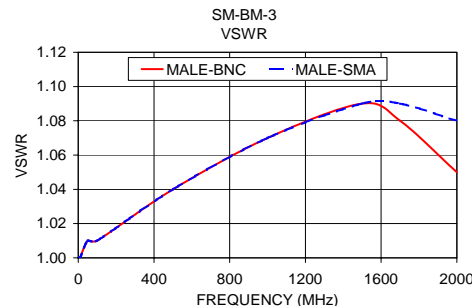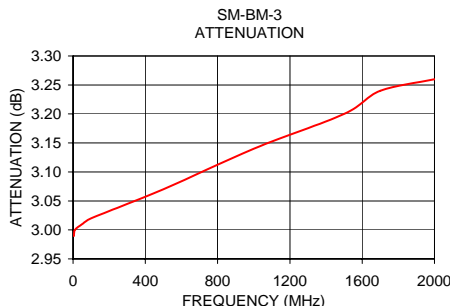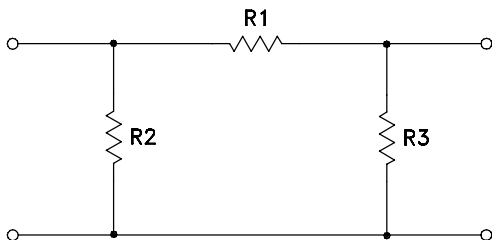

Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED
 The Design Engineers Search Engine
 IFRF MICROWAVE COMPONENTS

For detailed performance specs
 & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
 M96826
 EE-9890
 SM-BM-3
 URJ/TD/CP/AM
 070117