

Surface Mount

Voltage Controlled Oscillator

SOS-822PV-119+

5V Tuning for PLL IC's 795 to 825 MHz

Features

- Linear tuning characteristics
- Low phase noise
- Low pushing
- Low pulling
- Small size 0.3" x 0.3"
- Aqueous washable

Applications

- Wireless microphones
- Mobile radio services



CASE STYLE: FZ802

PRICE: \$ 20.60 ea. QTY (5-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER		
	Min.	Max.		Typ.				VOLTAGE RANGE (V)	SENSITIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	Typ.		Typ.	Typ.			Max.	Vcc	Current
				1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.		Typ.	Typ.			Max.	(volts)	(mA)
SOS-822PV-119+	795	825	+1	-84	-107	-127	-147	0.5	5	27	50	130	-90	-25	-15	0.4	0.2	5	20	

Pin Connections


RF OUT	8
VCC	11
V-TUNE	1
GROUND	2,3,4,5,6,7,9,10,12

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

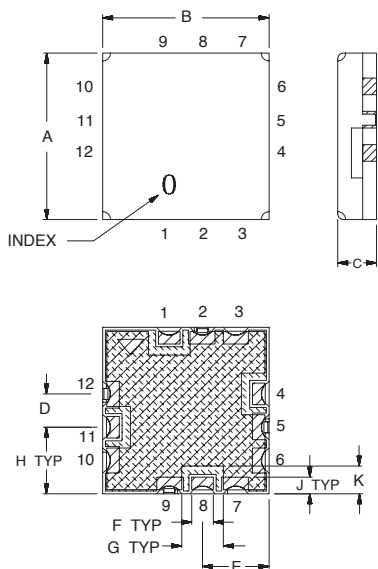

PCB Land Pattern



Demo Board MCL P/N: TB-271 Suggested PCB Layout (PL-143)

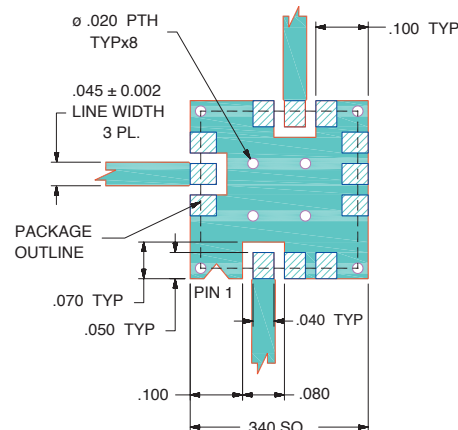

NOTE:

1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt.
.300	.300	.070	.060	.120	.039	.075	.120	.030	.050	.340	.140	.340	.140	.050	.040	grams
7.62	7.62	1.78	1.52	3.05	0.99	1.91	3.05	0.76	1.27	8.64	3.56	8.64	3.56	1.27	1.02	0.25



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. OR
M111586
EDR-7897F1
ROS-822PV-119+
RAV
090908
Page 1 of 2

Performance Data & Curves*

SOS-822PV-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 810 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	33.94	740.0	735.0	732.0	-1.10	-0.15	0.51	12.00	-20.9	-52.6	-41.8	0.32	0.10	-82.1	-104.4	-126.6	-143.1	1.0	-79.80
0.50	29.05	756.0	751.2	748.4	-1.00	-0.04	0.64	12.11	-22.3	-53.5	-42.5	0.03	0.11	-82.5	-105.5	-126.2	-144.0	2.0	-87.27
0.75	27.88	763.4	758.4	755.6	-0.91	0.06	0.73	12.17	-22.8	-50.9	-42.5	0.09	0.11	-82.7	-106.4	-127.8	-144.7	3.4	-95.53
1.00	27.22	770.4	765.4	762.5	-0.79	0.16	0.83	12.24	-23.3	-52.3	-42.1	0.18	0.11	-81.9	-106.2	-125.8	-145.9	5.7	-98.58
1.25	26.80	777.3	772.2	769.2	-0.65	0.27	0.94	12.30	-23.8	-50.2	-40.8	0.24	0.10	-81.2	-105.9	-128.2	-145.1	8.1	-103.52
1.50	26.68	784.2	778.9	775.8	-0.50	0.40	1.05	12.35	-24.4	-52.4	-40.1	0.27	0.10	-81.5	-106.0	-126.8	-144.6	10.0	-105.32
1.75	26.74	791.0	785.6	782.4	-0.34	0.54	1.16	12.40	-25.0	-51.2	-39.7	0.27	0.09	-80.3	-105.7	-127.8	-144.5	19.6	-112.77
2.00	26.97	797.8	792.3	789.0	-0.21	0.65	1.24	12.45	-25.6	-55.2	-38.9	0.27	0.07	-80.7	-106.3	-127.4	-145.1	33.3	-117.78
2.25	27.23	804.6	799.0	795.7	-0.16	0.70	1.29	12.50	-26.5	-55.3	-38.2	0.26	0.05	-80.6	-105.6	-127.7	-144.3	57.2	-124.76
2.50	27.52	811.6	805.8	802.4	-0.17	0.68	1.30	12.55	-27.4	-54.3	-37.6	0.26	0.05	-79.4	-105.1	-126.8	-145.7	81.8	-125.74
2.75	27.82	818.6	812.7	809.1	-0.20	0.66	1.30	12.60	-28.3	-56.3	-37.9	0.24	0.05	-79.9	-105.1	-126.8	-145.4	100.0	-126.98
3.00	28.08	825.7	819.6	816.0	-0.19	0.69	1.34	12.64	-29.5	-51.9	-37.9	0.21	0.07	-79.6	-105.0	-127.1	-144.4	139.3	-130.57
3.25	28.17	832.9	826.7	822.9	-0.09	0.78	1.45	12.70	-30.5	-47.6	-37.9	0.18	0.09	-80.4	-104.8	-126.5	-144.9	167.3	-131.28
3.50	28.08	840.1	833.7	829.8	0.14	0.96	1.61	12.76	-31.4	-46.3	-39.1	0.18	0.10	-80.1	-105.3	-127.0	-145.6	199.2	-132.99
3.75	27.74	847.2	840.7	836.7	0.38	1.17	1.81	12.83	-32.3	-42.3	-40.0	0.23	0.11	-79.4	-105.1	-127.3	-146.1	284.8	-135.71
4.00	27.36	854.3	847.6	843.6	0.56	1.34	1.96	12.89	-33.0	-42.0	-40.8	0.30	0.12	-79.5	-105.0	-127.0	-144.9	342.1	-138.38
4.25	26.75	861.2	854.5	850.3	0.72	1.50	2.15	12.95	-33.5	-39.2	-41.4	0.40	0.13	-79.2	-106.0	-127.7	-147.0	489.1	-139.97
4.50	26.33	868.0	861.2	856.9	0.91	1.64	2.27	13.01	-34.3	-38.9	-41.0	0.46	0.14	-78.8	-105.3	-127.9	-144.8	582.3	-141.18
4.75	25.78	874.5	867.8	863.4	1.00	1.76	2.38	13.07	-35.2	-37.0	-40.2	0.54	0.14	-78.6	-105.0	-127.3	-145.4	832.6	-145.06
5.00	25.55	881.0	874.2	869.9	1.11	1.84	2.49	13.12	-35.9	-36.2	-38.7	0.59	0.15	-78.4	-104.6	-127.6	-145.9	1000.0	-145.64

*at 25°C unless mentioned otherwise

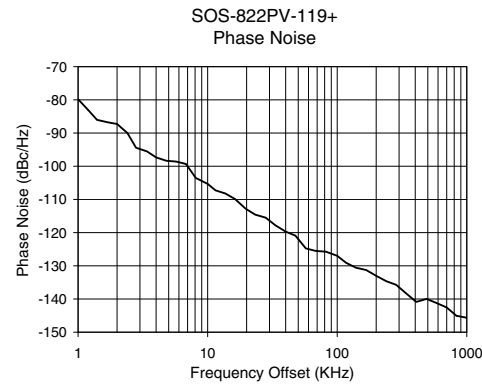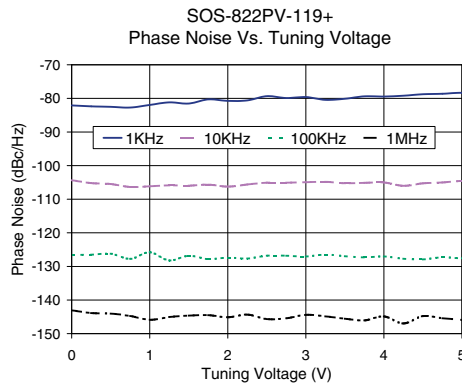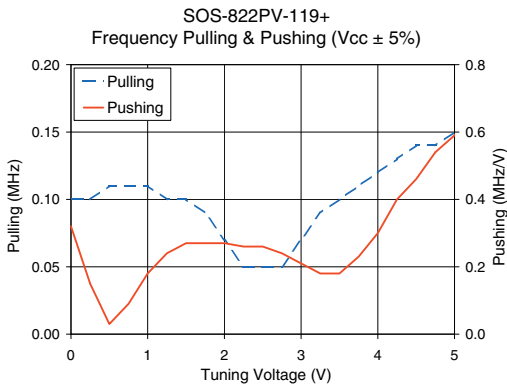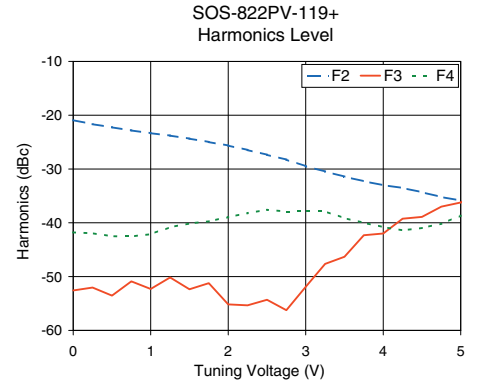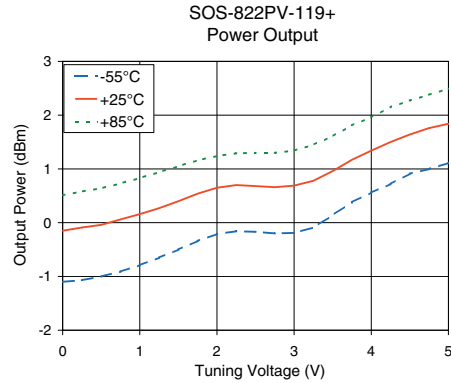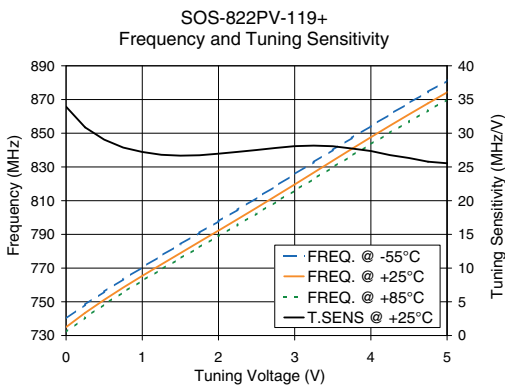

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.