


Frequency Synthesizer **SSND-1014N-119+**

50Ω Dual Frequency 1000 and 1440 MHz (fixed)

The Big Deal

- Dual frequency
- Low phase noise and spurious
- Very small size 0.60" x 0.60" x 0.138"



CASE STYLE: KJ1373

Product Overview

The SSND-1014N-119+ is a Dual Frequency Synthesizer, designed to operate at two discrete, single frequency synthesizers 1000 and 1440 MHz for GPS receiver application. The SSND-1014N-119+ is packaged in a very small metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Dual frequency	For saving in cost and system real estate.
Low phase noise and spurious	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Very small size, 0.60" x 0.60" x 0.138"	The small size enables the SSND-1014N-119+ to be used in compact designs.
Low current consumptions	Can be used in a portable system.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED  RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Frequency Synthesizer

SSND-1014N-119+

50Ω Dual Frequency 1000 and 1440 MHz (fixed)

Features


- Dual frequency
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC RF-IF=+2.5V, VCC VCO RF=+3.0V, VCC VCO IF=+3.0V)
- Small size 0.60" x 0.60" x 0.138"

Applications

- GPS receiver

General Description

The SSND-1014N-119+ is a Frequency Synthesizer, designed to operate at 1000 and 1440 MHz for GPS receiver application. The SSND-1014N-119+ is packaged in a metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise. To enhance the robustness of SSND-1014N-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.




CASE STYLE: KJ1373

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS
Compliance. See our web site for RoHS Compliance
methodologies and qualifications.

Simplified Schematic

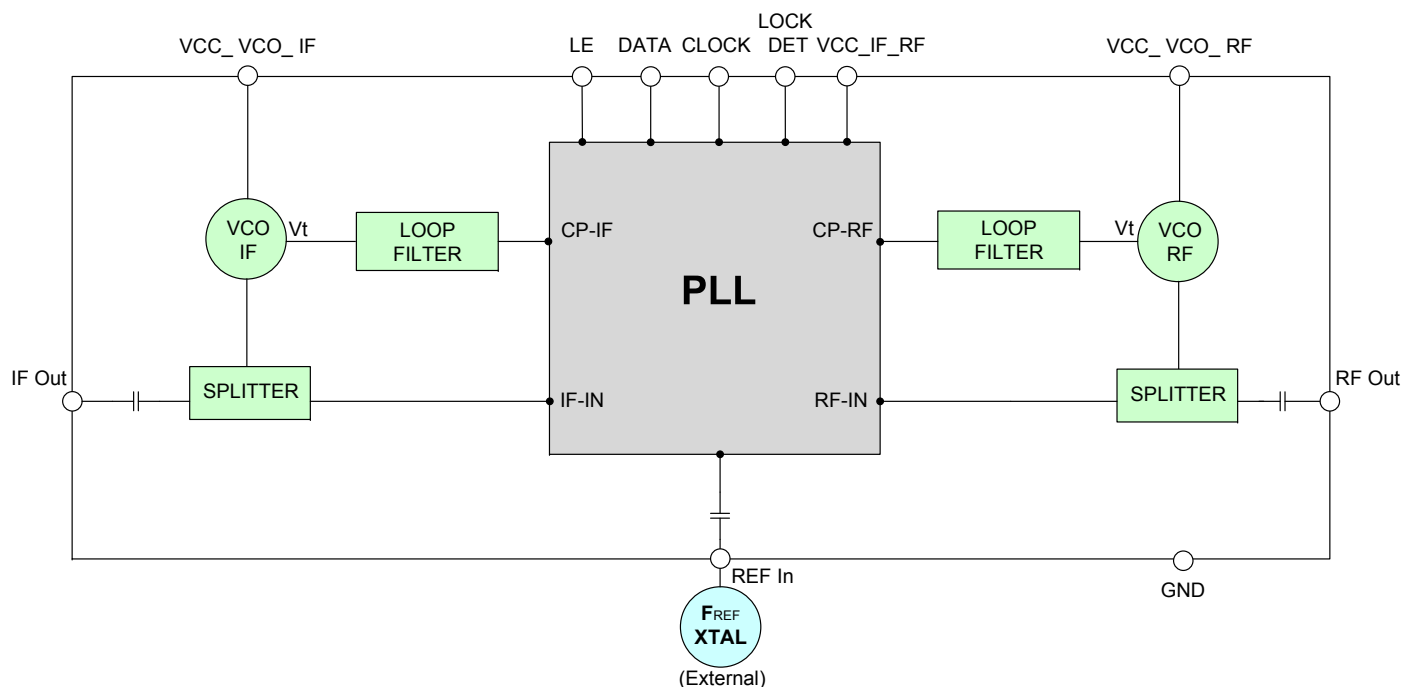

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters	Test Conditions	Min.	Typ.	Max.	Units
IF Frequency Range (Fixed)	-	1000	-	1000	MHz
RF Frequency Range (Fixed)	-	1440	-	1440	
Comparison Frequency	-	-	2000	-	kHz
Settling Time	Within ± 1 kHz	-	0.4	-	mSec
IF Output Power	-	-12.0	-9.7	-8.0	dBm
RF Output Power	-	+1.0	+2.9	+5.0	
IF SSB Phase Noise	@ 100 Hz offset	-	-84	-	dBc/Hz
	@ 1 kHz offset	-	-92	-87	
	@ 10 kHz offset	-	-90	-86	
	@ 100 kHz offset	-	-118	-114	
	@ 1 MHz offset	-	-145	-140	
RF SSB Phase Noise	@ 100 Hz offset	-	-82	-	
	@ 1 kHz offset	-	-89	-84	
	@ 10 kHz offset	-	-89	-85	
	@ 100 kHz offset	-	-119	-115	
	@ 1 MHz offset	-	-143	-135	
IF Reference Spurious Suppression	Ref. Freq. 10 MHz	-	-80	-70	dBc
RF Reference Spurious Suppression		-	-106	-76	
IF Comparison Spurious Suppression	Comp Freq. 2000 kHz	-	-96	-80	
RF Comparison Spurious Suppression		-	-97	-78	
Non - Harmonic Spurious Suppression	-	-	-90	-	
IF Harmonic Suppression	-	-	-30	-19	
RF Harmonic Suppression	-	-	-31	-26	V
VCC RF-IF Supply Voltage	+2.50	+2.25	+2.50	+2.75	
VCC VCO IF Supply Voltage	+3.00	+2.95	+3.00	+3.05	
VCC VCO RF Supply Voltage	+3.00	+2.95	+3.00	+3.05	mA
VCC RF-IF Supply Current	-	-	6	12	
VCO IF Supply Current	-	-	7	13	
VCO RF Supply Current	-	-	10	16	MHz
Reference Input (External)	Frequency	10 (square wave)	-	10	
	Amplitude	1	-	1	
	Input impedance	-	-	100	
	Phase Noise @ 1 kHz offset	-	-	-145	
RF Output port Impedance	-	-	50	-	Ω
Input Logic Level	Input high voltage	-	2.20	-	V
	Input low voltage	-	-	0.45	V
Digital Lock Detect	Locked	-	1.90	-	V
	Unlocked	-	-	0.40	V
Frequency Synthesizer PLL	-	LMX2433			
PLL Programming	-	3-wire serial 2.5V CMOS			
Register Map @ IF+RF Freq.	R0_Register	-	(MSB) 00000100000000000000101000 (LSB)		
	R1_Register	-	(MSB) 010000000001011010000001 (LSB)		
	R2_Register	-	(MSB) 000000000000000000000010 (LSB)		
	R3_Register	-	(MSB) 11000100000000000000010111 (LSB)		
	R4_Register	-	(MSB) 0100000000000111110100100 (LSB)		
	R5_Register	-	(MSB) 000000000000000000000101 (LSB)		

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage	4V
PLL Supply Voltage	3V
VCO Supply Voltage to PLL Supply Voltage	N.A
Reference Frequency Voltage	-0.5Vmin, VCC RF-IF +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC RF-IF +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Typical Performance Data

FREQUENCY		POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURENT (mA)		
		-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
IF	1000	-10.29	-9.72	-9.94	6.86	7.90	8.65	6.47	6.66	6.82
RF	1440	1.93	2.95	3.68	8.86	10.46	11.57	6.47	6.66	6.82

FREQUENCY		HARMONICS (dBc)					
		F2			F3		
		-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
IF	1000	-24.83	-31.22	-43.66	-49.04	-44.89	-36.17
RF	1440	-29.89	-30.87	-32.32	-57.39	-63.55	-67.75

FREQUENCY		@TEMP.	PHASE NOISE (dBc/Hz)				
			@OFFSETS				
			100Hz	1kHz	10kHz	100kHz	1MHz
IF	1000	-45°C	-82.37	-92.65	-91.73	-118.91	-146.75
		+25°C	-83.35	-90.41	-91.46	-118.35	-145.98
		+85°C	-86.92	-92.44	-91.14	-117.31	-144.69
RF	1440	-45°C	-80.87	-90.97	-89.77	-120.14	-143.76
		+25°C	-82.69	-91.08	-89.51	-119.8	-143.09
		+85°C	-82.90	-89.83	-89.92	-119.21	-142.57



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

COMPARISON SPURIOUS ORDER	(IF) COMPARISON SPURIOUS @ Fcarrier 1000MHz+(n*Fcomparison) (dBc) note 1			(RF) COMPARISON SPURIOUS @ Fcarrier 1440MHz+(n*Fcomparison) (dBc) note 1			
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-4		-101.21	-104.36	-102.09	-96.99	-122.86	-104.97
-3		-98.72	-105.65	-102.13	-98.11	-114.62	-96.87
-2		-93.83	-106.00	-96.70	-92.74	-116.44	-92.69
-1		-90.41	-96.24	-90.61	-85.19	-103.99	-88.86
0 ^{note 2}		-	-	-	-	-	-
+1		-87.18	-90.94	-90.61	-85.35	-104.64	-88.89
+2		-89.40	-103.62	-101.95	-92.89	-117.51	-92.77
+3		-93.28	-98.88	-108.19	-98.86	-117.27	-96.70
+4		-97.85	-100.78	-105.91	-97.13	-124.83	-104.39

Note 1: Comparison frequency 2000 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	(IF) REFERENCE SPURIOUS @ Fcarrier 1000MHz+(n*Freference) (dBc) note 3			(RF) REFERENCE SPURIOUS @ Fcarrier 1440MHz+(n*Freference) (dBc) note 3		
	n	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-107.54	-105.37	-105.57	-115.59	-103.43	-110.01
-4	-93.75	-97.17	-96.16	-117.59	-110.24	-110.38
-3	-84.36	-86.05	-86.28	-114.38	-110.76	-112.91
-2	-78.28	-78.97	-79.06	-124.24	-104.56	-119.42
-1	-75.49	-76.34	-76.07	-119.55	-107.94	-100.63
0 ^{note 4}	-	-	-	-	-	-
+1	-82.30	-82.04	-81.92	-105.29	-104.57	-110.55
+2	-83.79	-83.41	-83.57	-111.78	-110.73	-114.76
+3	-89.47	-90.36	-90.65	-123.06	-112.23	-115.98
+4	-98.90	-99.89	-101.31	-117.19	-120.43	-115.81
+5	-108.33	-112.67	-117.95	-113.26	-113.11	-112.92

Note 3: Reference frequency 10 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661









The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Typical Performance Curves

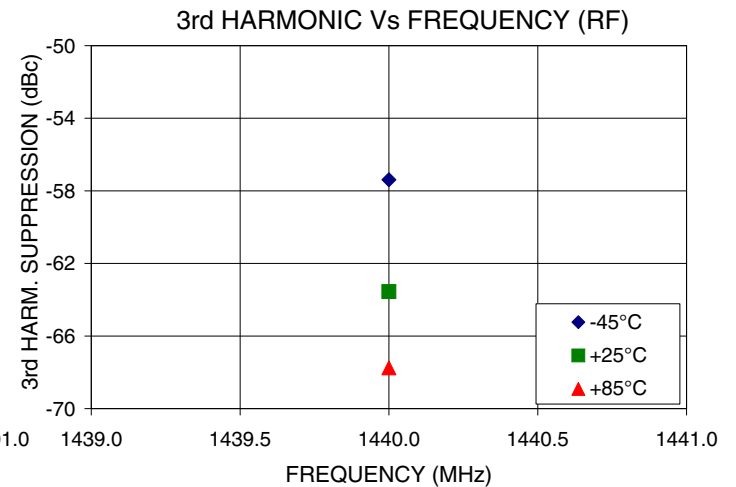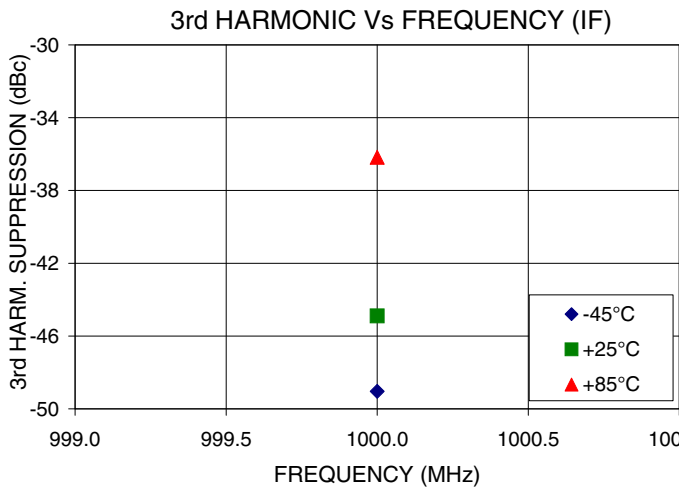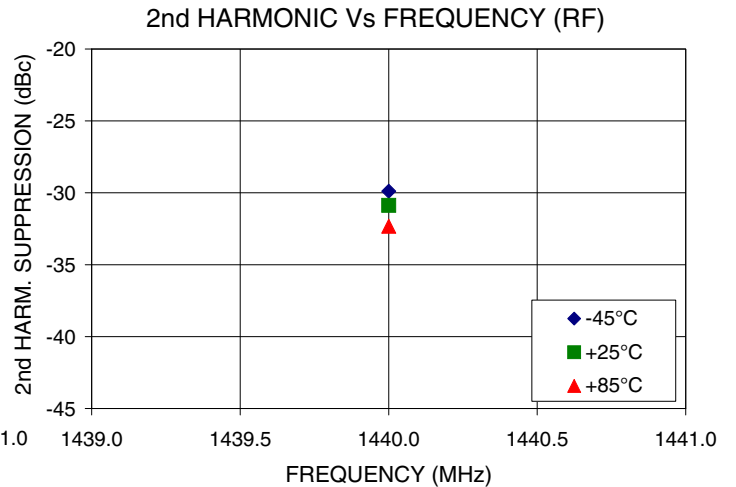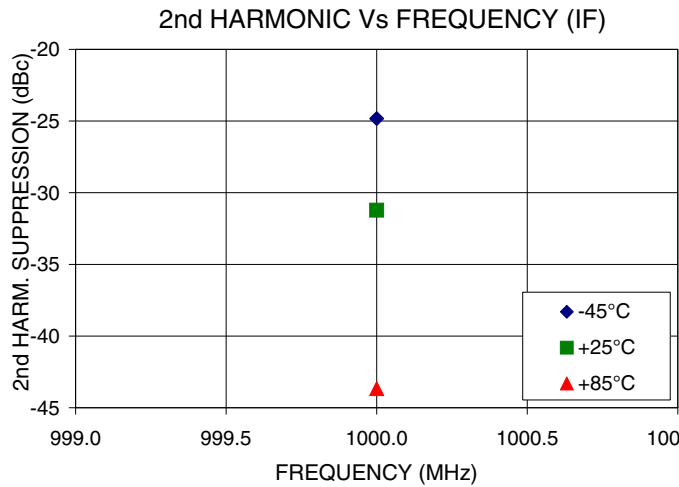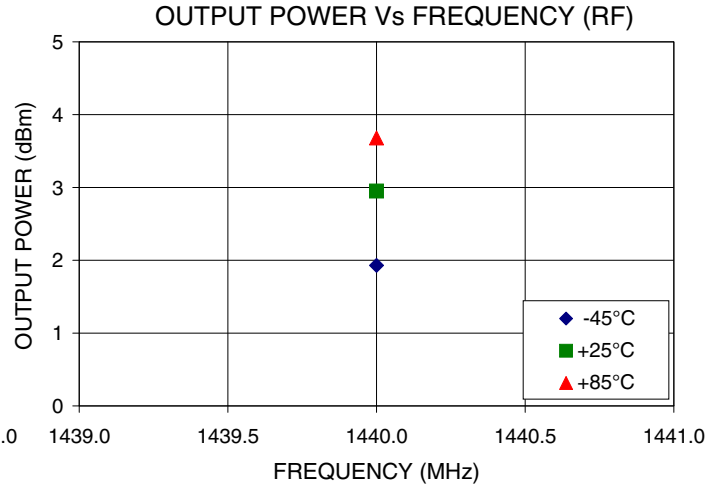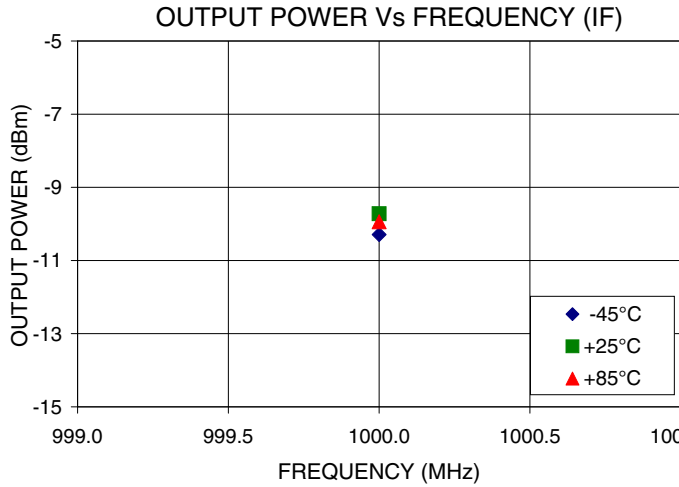







IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661







The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

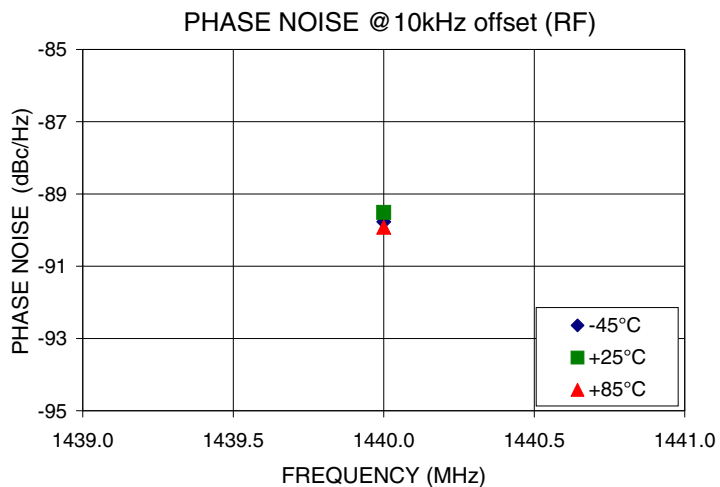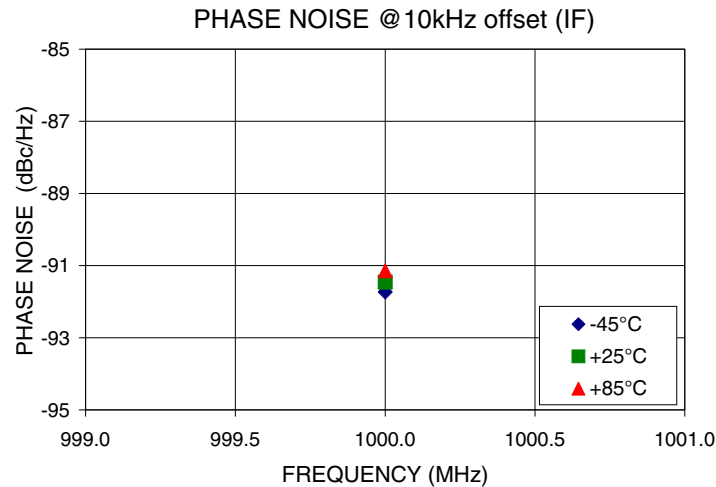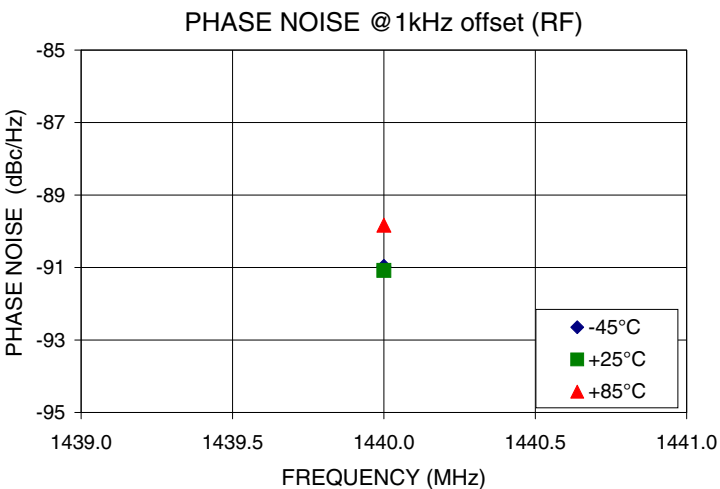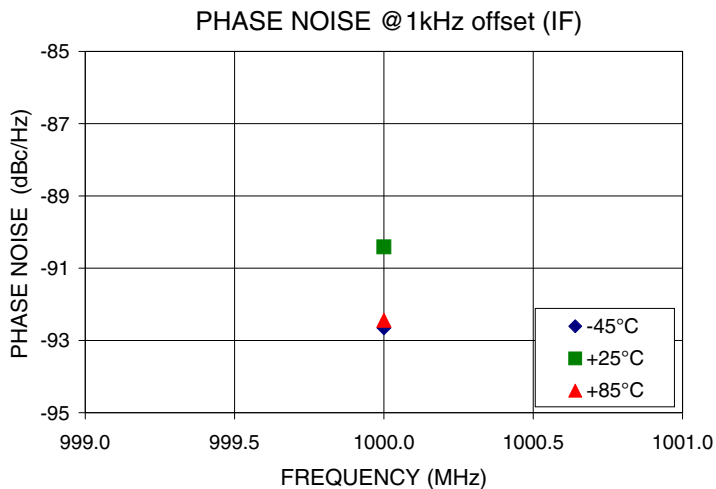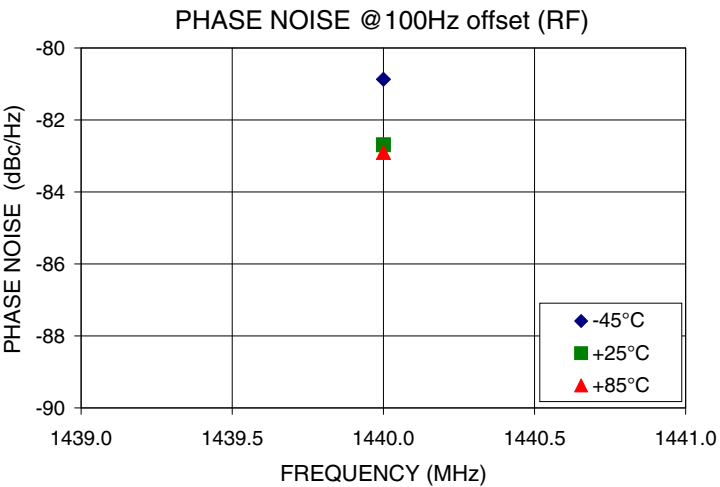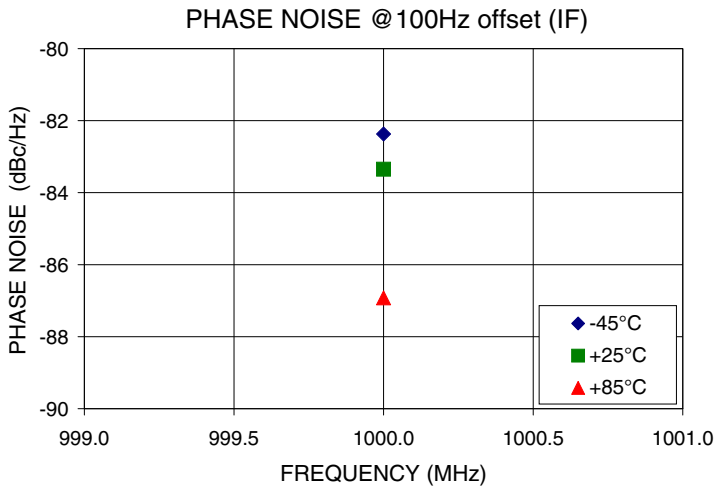

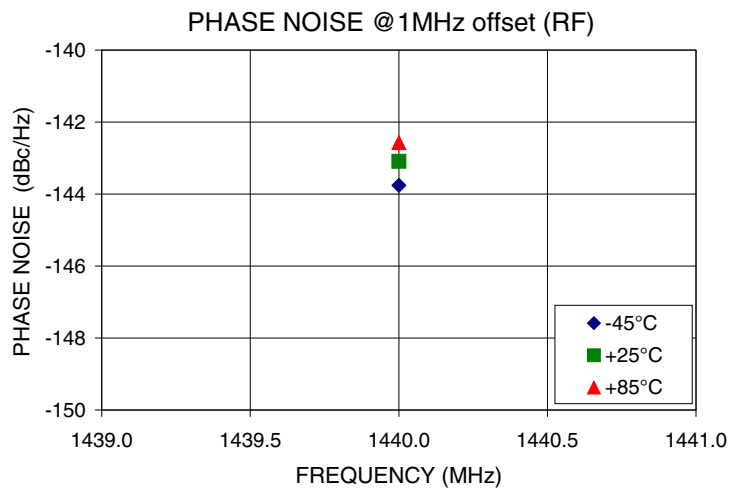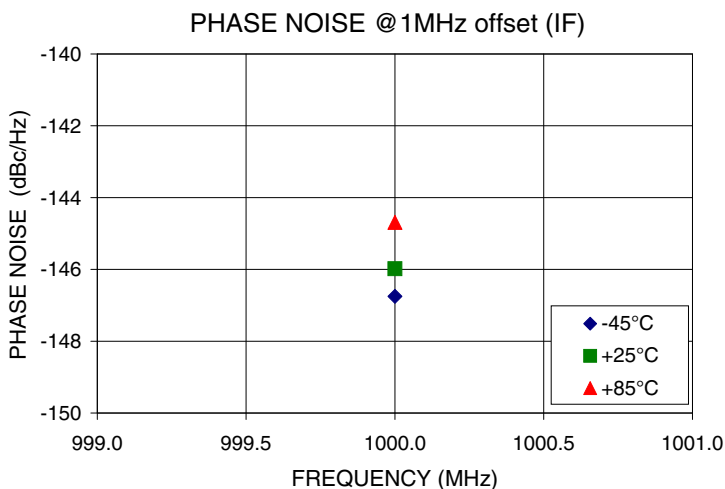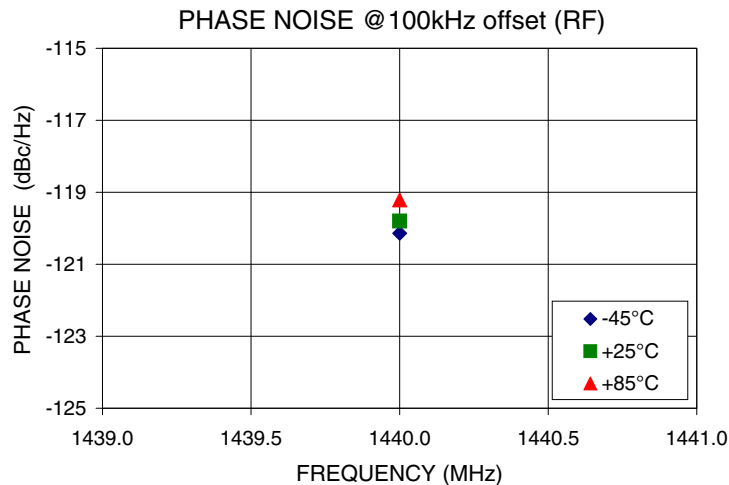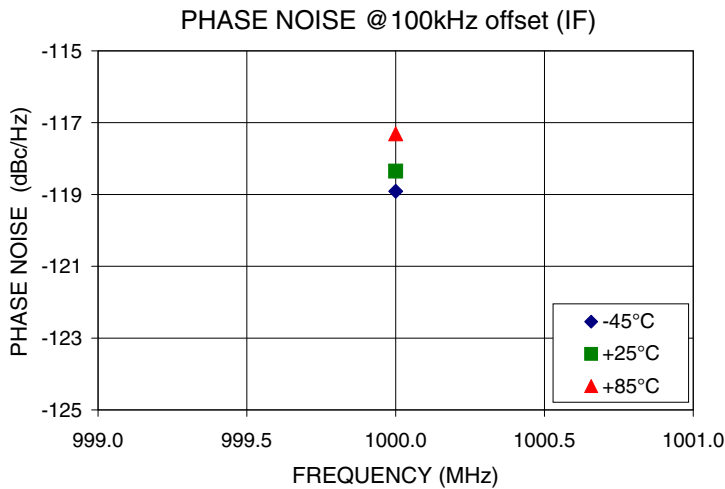

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.


COMPARISON SPURIOUS (IF)
Vs FREQ. OFFSET @ Fcar = 1000MHz

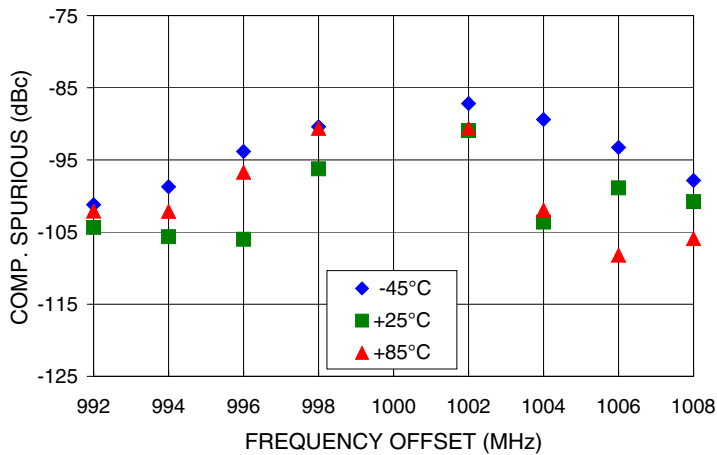


COMPARISON SPURIOUS (RF)
Vs FREQ. OFFSET @ Fcar = 1440MHz

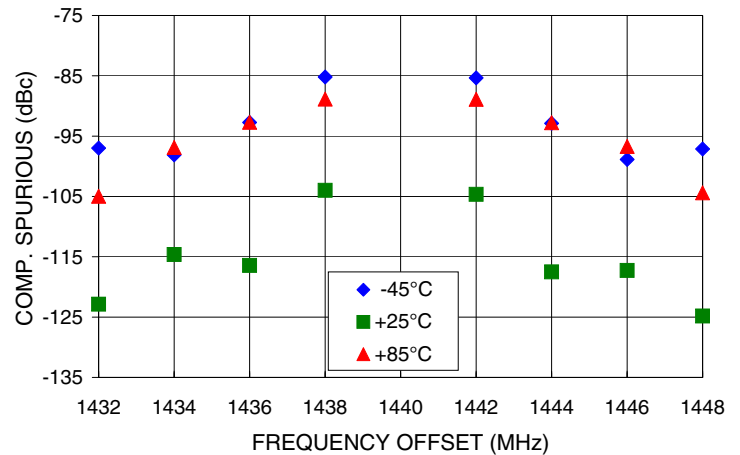

REFERENCE SPURIOUS (IF)
Vs FREQ. OFFSET @ Fcar = 1000MHz

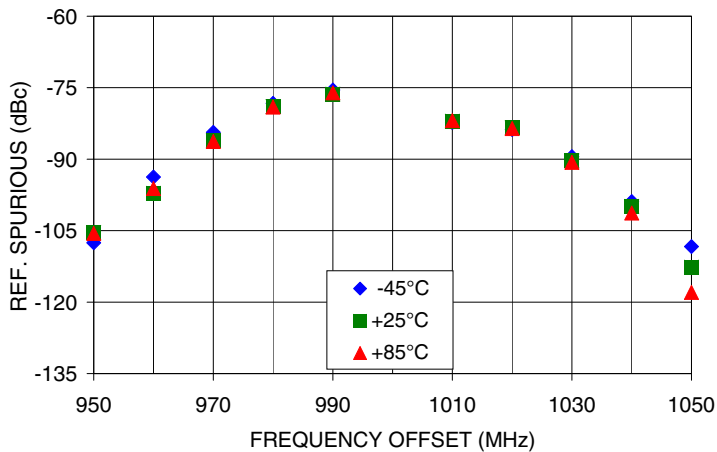

REFERENCE SPURIOUS (RF)
Vs FREQ. OFFSET @ Fcar = 1440MHz

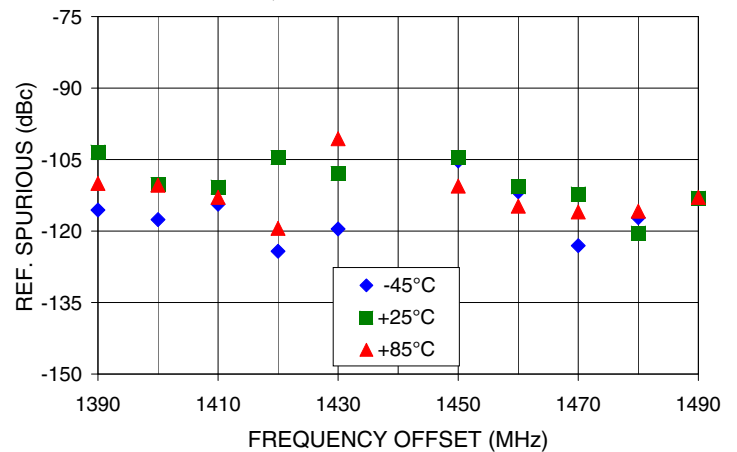


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Pin Configuration

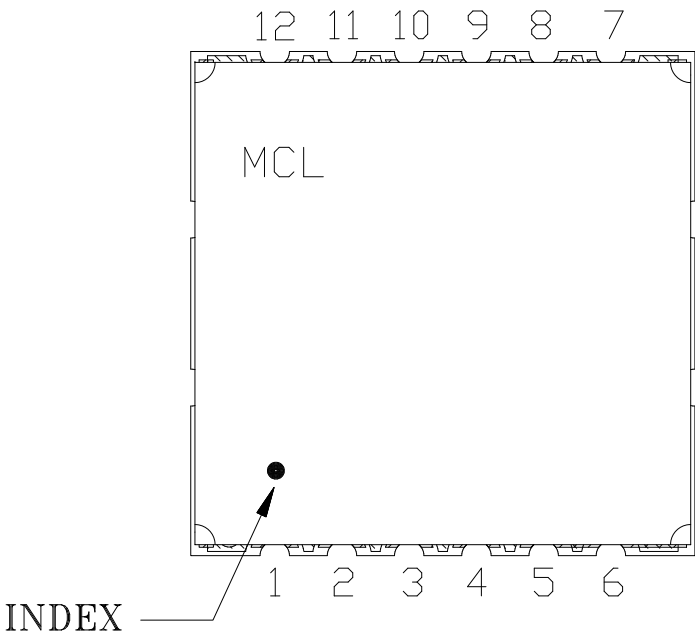


Pin Connection


Pin Number	Function
1	IF OUT
2	GND
3	VCC RF-IF
4	VCC VCO IF
5	REF IN
6	LOCK DET
7	RF OUT
8	GND
9	VCC VCO RF
10	CLOCK
11	DATA
12	LE

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

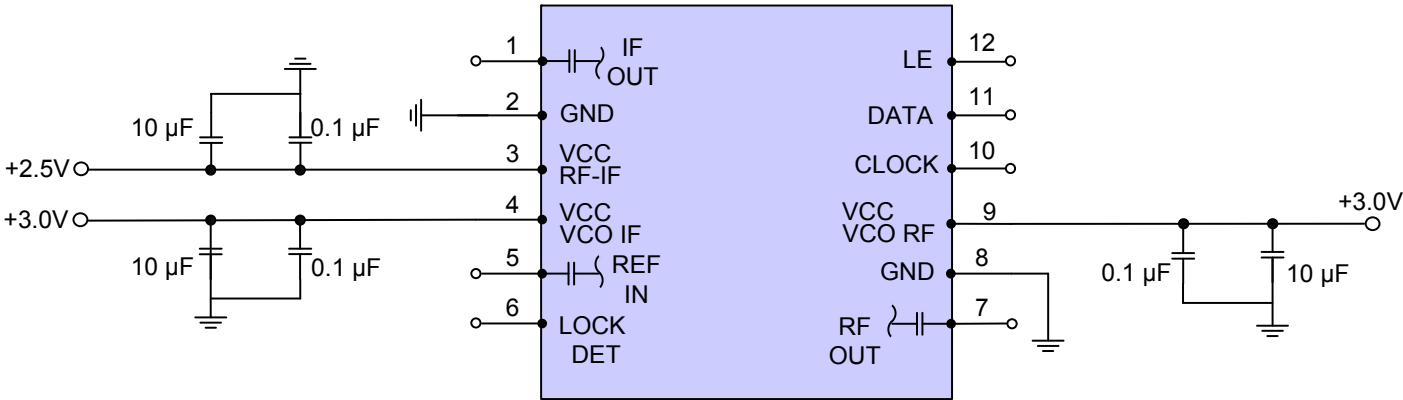

Device Marking

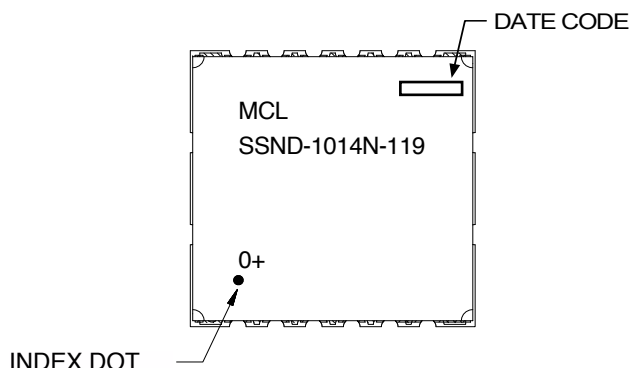**Additional Detailed Technical Information**

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KJ1373

Tape & Reel: TR-F95

Suggested Layout for PCB Design: PL-325

Evaluation Board: TB-571+

Environment Ratings: ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.