

Surface Mount Bandpass Filter

SXBP-350+

50Ω 330 to 375 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7





Outline Drawing

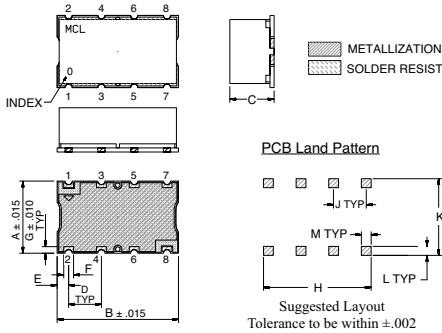

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	wt. grams
.440	.740	.27	.200	.07	.060	11.18	18.80	6.86	5.08	1.78	1.52	
						1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

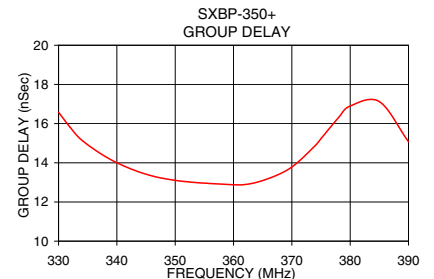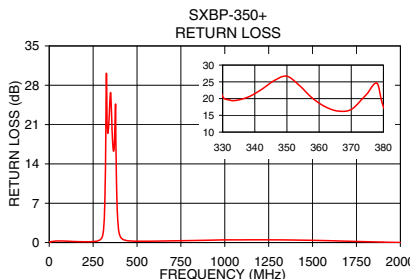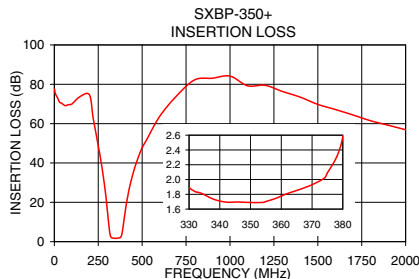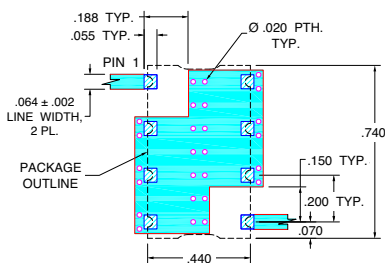


Features

- High Rejection
- Flat Group Delay @ Passband
- Good VSWR, 1.2:1 Typ @ Passband
- Shielded case
- Aqueous washable

Applications

- Radio Link
- Receivers / Transmitters
- Harmonic rejection



CASE STYLE: HF1139
PRICE: \$15.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
350	330 - 375	280	435	245	520 - 2000	1.2	1.5	20

Typical Frequency Response

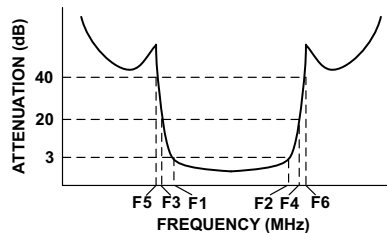

Functional Schematic

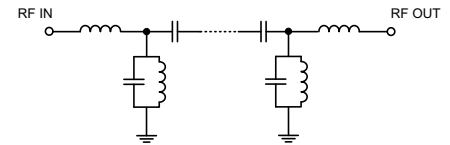

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	\bar{x}	σ			
0.5	77.48	2.27	0.24	330.0	16.58
245.0	51.21	0.45	0.22	332.0	15.81
280.0	32.44	0.51	0.29	334.0	15.15
300.0	17.62	0.71	1.01	338.0	14.32
310.0	8.62	0.78	3.07	342.0	13.74
315.0	4.82	0.59	6.57	346.0	13.33
320.0	2.74	0.32	15.40	350.0	13.10
330.0	1.89	0.19	17.22	354.0	12.98
342.0	1.69	0.20	22.55	355.0	12.96
350.0	1.69	0.19	26.48	358.0	12.91
366.0	1.87	0.19	19.67	362.0	12.89
375.0	2.09	0.18	23.06	366.0	13.20
385.0	4.07	0.24	11.76	370.0	13.78
392.0	7.99	0.31	5.74	375.0	15.23
405.0	16.28	0.29	2.56	378.0	16.30
435.0	30.23	0.18	1.21	380.0	16.90
520.0	50.91	0.07	0.55	385.0	17.12
2000.0	56.91	0.26	0.35	390.0	15.07

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M119635
EDR-8668AU
SXBP-350+
URJ/RAV
080919
Page 1 of 1