

Low Pass Filter

SXLP-25+

50Ω DC to 25 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7


Outline Drawing

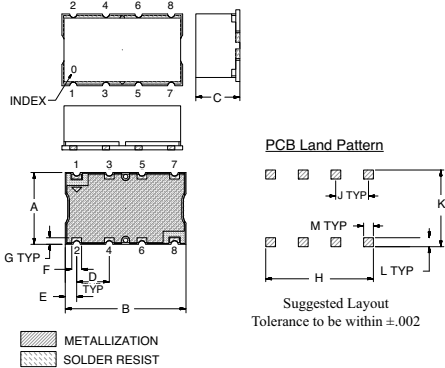

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.440	.740	.270	.200	0.70	0.60	
11.18	18.80	6.86	5.08	1.78	1.52	
G	H	J	K	L	M	wt. grams
.040	.660	.200	.470	.055	.060	
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

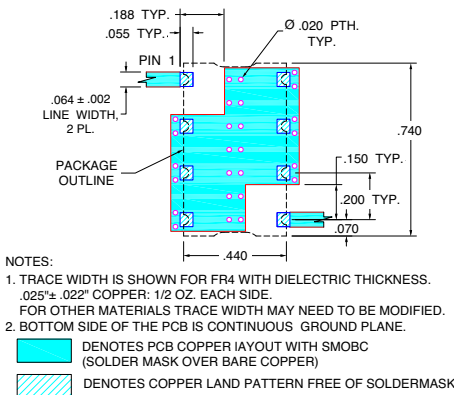


Features

- High rejection
- Sharp cut-off
- Shielded package
- Aqueous washable
- Low cost

Applications

- Defense communications
- Receivers / Transmitters
- Harmonic rejection



CASE STYLE: HF1139
PRICE: \$11.45 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss > 20dB)	(Loss > 40dB)	Passband Typ.	Stopband Typ.
DC - 25	28	36 - 47	47 - 1000	1.7	18

Typical Frequency Response



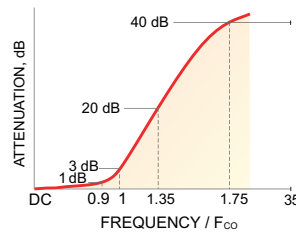


Functional Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	\bar{x}	σ			
0.5	0.02	0.00	42.42	0.5	31.44
1.5	0.04	0.00	31.78	2.0	31.60
4.0	0.08	0.00	24.60	4.0	31.51
12.0	0.16	0.01	27.89	6.0	31.81
21.0	0.31	0.01	24.97	8.0	32.44
25.0	0.45	0.01	31.31	10.0	33.25
26.5	0.82	0.02	13.63	12.0	34.06
27.4	1.66	0.04	7.70	14.0	35.03
28.0	2.67	0.06	5.16	16.0	36.41
29.0	5.11	0.11	2.63	18.0	38.75
31.0	11.27	0.18	0.86	20.0	41.51
36.0	24.96	0.31	0.27	21.0	43.15
47.0	45.89	0.87	0.15	22.0	45.08
100.0	73.69	1.56	0.11	23.0	47.69
300.0	83.77	2.45	0.16	24.0	51.81
500.0	84.18	1.52	0.22	25.0	58.31
800.0	75.17	1.62	0.31	26.5	71.54
1000.0	68.20	1.94	0.37	28.0	74.97

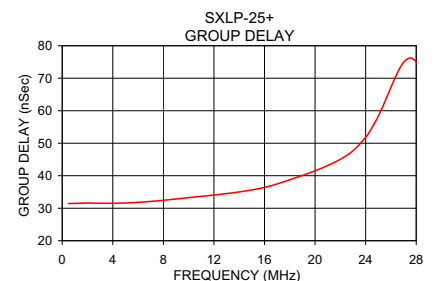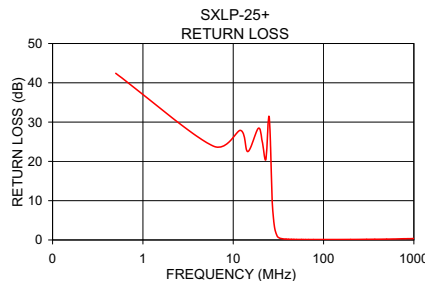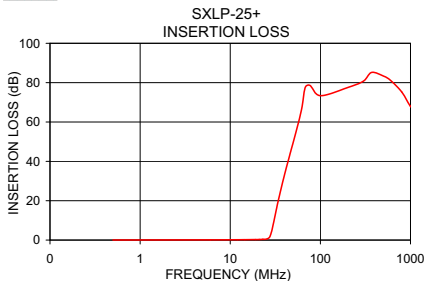

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M112220
EDR-7473/1U
SXLP-25+
URJ/RAV
071023
page 1 of 1