

Low Pass Filter

SXLP-36+

50Ω DC to 36 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7


Outline Drawing

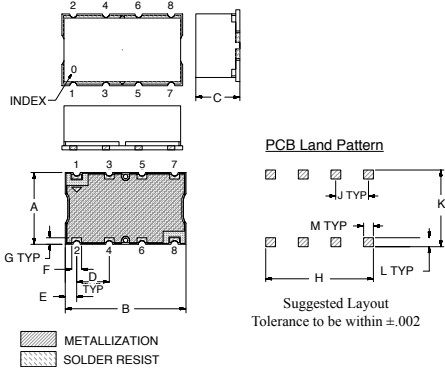

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.440	.740	.270	.200	0.70	0.60	
11.18	18.80	6.86	5.08	1.78	1.52	
G	H	J	K	L	M	wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

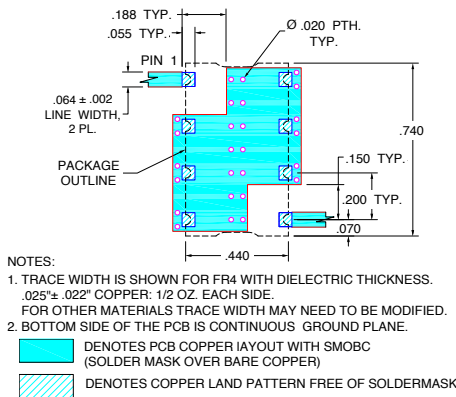


Features

- High rejection
- Sharp cut-off
- Shielded package
- Aqueous washable
- Low cost

Applications

- Defense communications
- Receivers / Transmitters
- Harmonic rejection



CASE STYLE: HF1139
PRICE: \$ 8.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss > 20dB)	(Loss > 40dB)	Passband Typ.	Stopband Typ.
DC - 36	40	50 - 57	57 - 560	1.3	18

Typical Frequency Response






Functional Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	\bar{x}	σ			
0.5	0.01	0.00	38.73	0.5	16.94
1.5	0.02	0.00	35.43	2.0	16.96
4.0	0.04	0.00	28.46	8.0	17.22
10.0	0.08	0.01	23.57	9.0	17.33
23.0	0.16	0.01	31.50	9.5	17.40
32.0	0.32	0.01	27.33	10.0	17.47
36.0	0.49	0.02	32.45	10.5	17.53
38.0	0.83	0.03	15.45	11.0	17.66
39.2	1.67	0.03	8.33	11.5	17.71
40.0	2.82	0.04	5.25	12.0	17.83
41.2	5.62	0.09	2.52	13.0	18.05
43.0	11.31	0.14	0.95	15.0	18.56
50.0	35.26	0.24	0.24	17.0	19.17
57.0	69.51	0.35	0.17	19.0	19.94
70.0	77.58	1.45	0.14	21.0	20.88
80.0	71.16	0.51	0.14	28.0	26.02
100.0	81.24	2.26	0.13	30.0	28.38
200.0	71.49	0.73	0.15	33.0	33.67
400.0	58.81	0.40	0.19	36.0	44.87
560.0	59.94	0.75	0.23	40.0	64.14

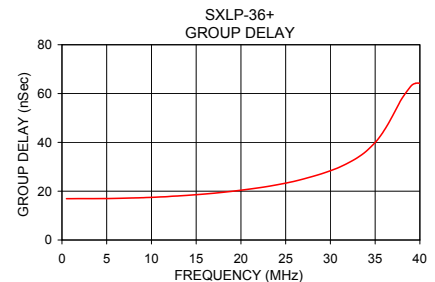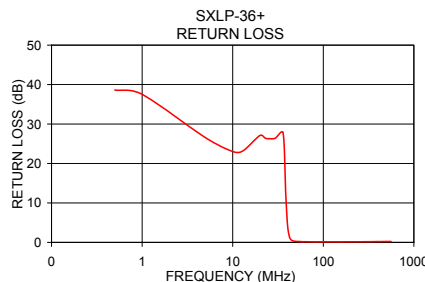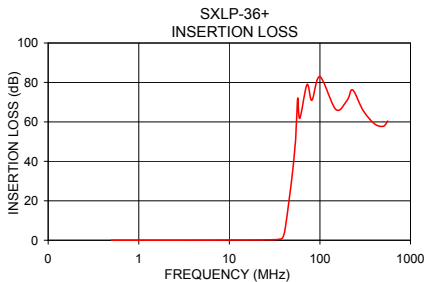

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M112220
EDR-7476/1U
SXLP-36+
URJ/RAV
071028
page 1 of 1