

Coaxial Limiter

VLM-52+

50Ω Broadband 10 to 500 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input Power	100mW

Permanent damage may occur if any of these limits are exceeded.

Features

- wideband, 10 to 500 MHz

Applications

- military, hi-rel applications
- stabilizing generator outputs
- reducing amplitude variations


CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VLM-52-S+	\$41.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

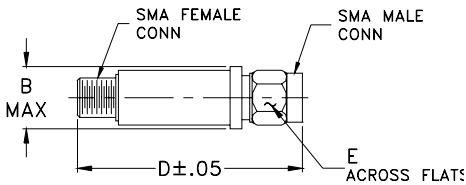

Outline Dimensions (inch/mm)




B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0

Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		10		500	MHz
Low Input Power Insertion Loss			0.5	1.9	dB
Input Power		+10		+20	dBm
Output Power			+9.5		dBm
Limiting Δ Output/1dB Δ Input	Input Power Range (dBm)				
	9.5 to 12.5		0.30		dB/dB
	12.5 to 15		0.20		
	15 to 20		0.14		

Typical Performance Data

Freq. (MHz)	Low drive Ins. Loss (dB)	Power Output (dBm)				Δ Output 1dB Δ Input		
		+10 dBm Input	+13 dBm Input	+15.5 dBm Input	+21.3 dBm Input	+10 to +13 dBm Input	+13 to +15.5 dBm Input	+15.5 to +21 dBm Input
10.00	-0.15	8.82	9.86	10.37	11.25	0.34	0.20	0.15
30.00	-0.17	8.81	9.82	10.34	11.12	0.34	0.21	0.13
60.00	-0.15	8.71	9.70	10.23	11.02	0.33	0.21	0.14
70.00	-0.15	8.65	9.63	10.16	11.00	0.33	0.21	0.14
90.00	-0.16	8.59	9.50	10.07	10.91	0.31	0.22	0.14
100.00	-0.19	8.55	9.55	10.06	10.89	0.33	0.20	0.14
120.00	-0.25	8.58	9.60	10.10	10.90	0.34	0.20	0.14
180.00	-0.51	8.52	9.48	10.00	10.80	0.32	0.21	0.14
200.00	-0.57	8.61	9.54	10.05	10.83	0.32	0.20	0.13
220.00	-0.58	8.62	9.57	10.10	10.81	0.32	0.21	0.12
240.00	-0.55	8.49	9.45	10.02	10.83	0.32	0.22	0.14
260.00	-0.46	8.43	9.41	9.96	10.78	0.33	0.22	0.14
300.00	-0.30	8.38	9.42	9.83	10.63	0.34	0.17	0.14
360.00	-0.54	8.19	9.11	9.55	10.38	0.32	0.18	0.14
380.00	-0.77	8.16	9.08	9.48	10.53	0.32	0.17	0.17
400.00	-1.01	8.04	8.96	9.41	10.64	0.32	0.18	0.20
440.00	-1.42	8.22	8.89	9.32	10.77	0.25	0.18	0.22
480.00	-1.48	8.08	8.79	9.28	11.08	0.26	0.20	0.26
500.00	-1.35	7.96	8.70	9.17	11.87	0.27	0.19	0.35

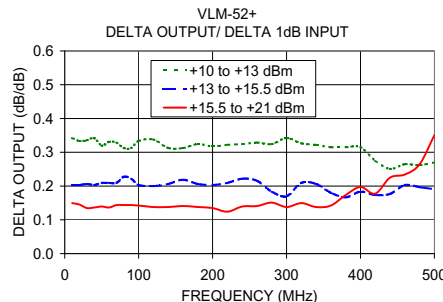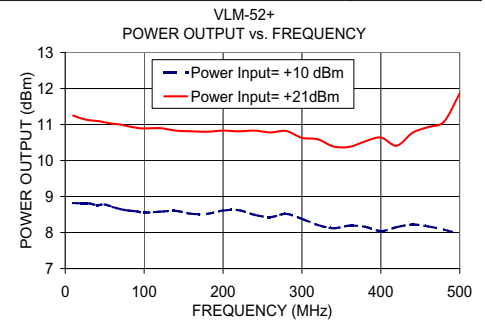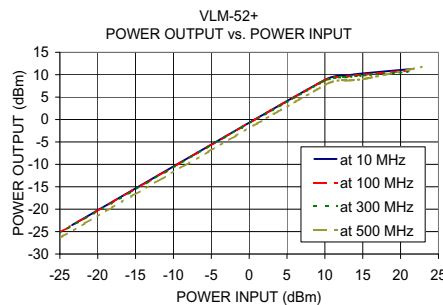

Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED
 The Design Engineers Search Engine
 I/F/R/F MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
 M109590
 VLM-52+
 ED-12714/3
 MM/CP
 090130